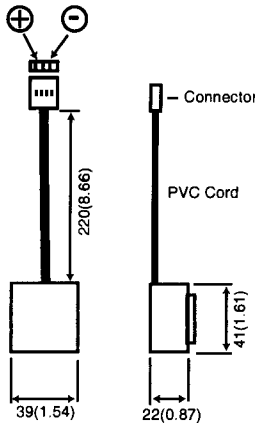
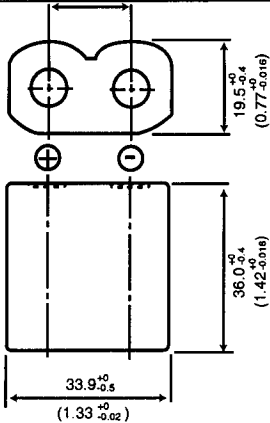



DIMENSIONS - CONTINUED

Bare cell Model No.	Dimensions / mm (inch)	
<p>BR-2/3A Two batteries in series (6V, 1200mAh)</p>	 <p>Connector: made by Bahgu Housing: P/N65039-033 Terminal: P/N47565</p> <p>BR-E3C3</p>	 <p>BR-P2</p>


INDIVIDUAL DATA SHEETS

BR-2/3A


Discharging under 30 kΩ
(equivalent to approx. 100μA)

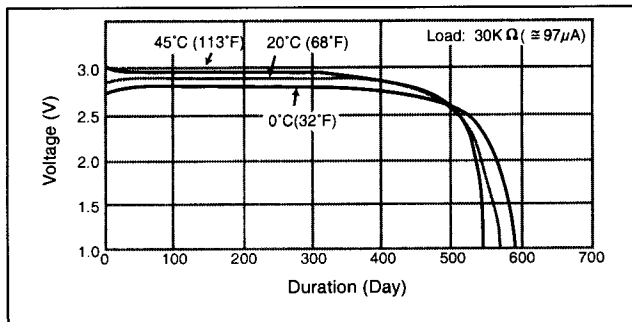


Discharging under 150 kΩ
(equivalent to approx. 20μA)

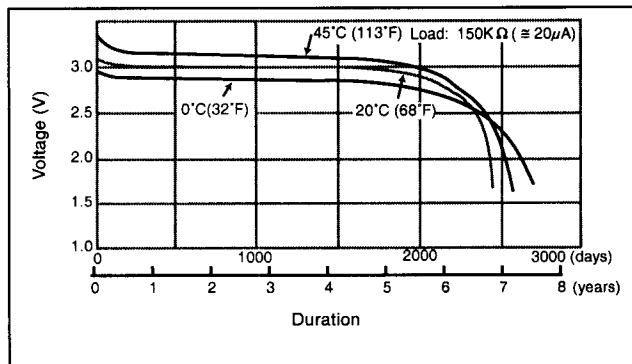

High temperature discharge under 150 kΩ
(equivalent to approx. 20μA)

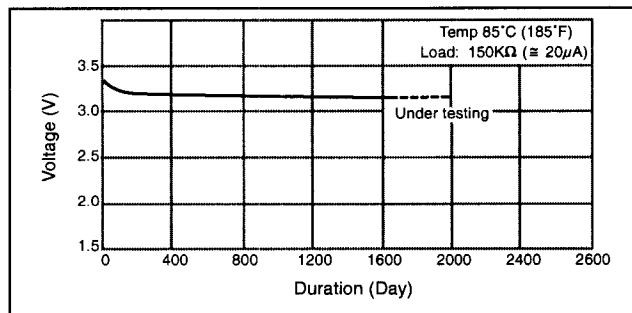


Operational voltage vs. Discharge current

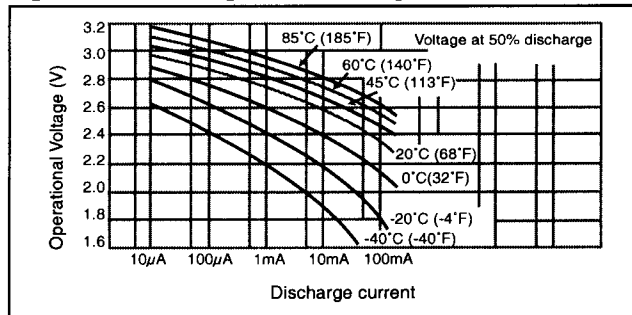


BR-E3C3C, BR-P2

(BR-2/3A Two batteries in series)
Discharge characteristics

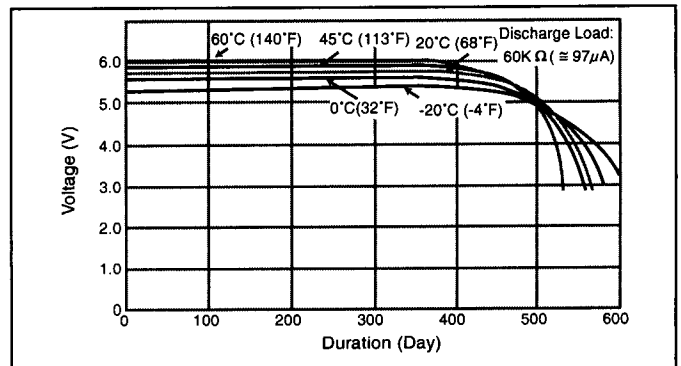

Discharge characteristics

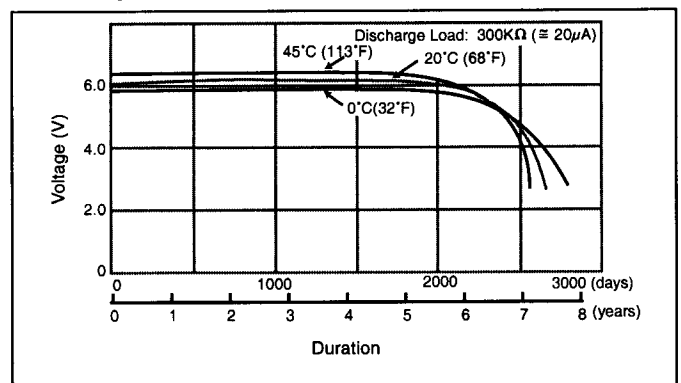

Operational voltage vs. Discharge current

