
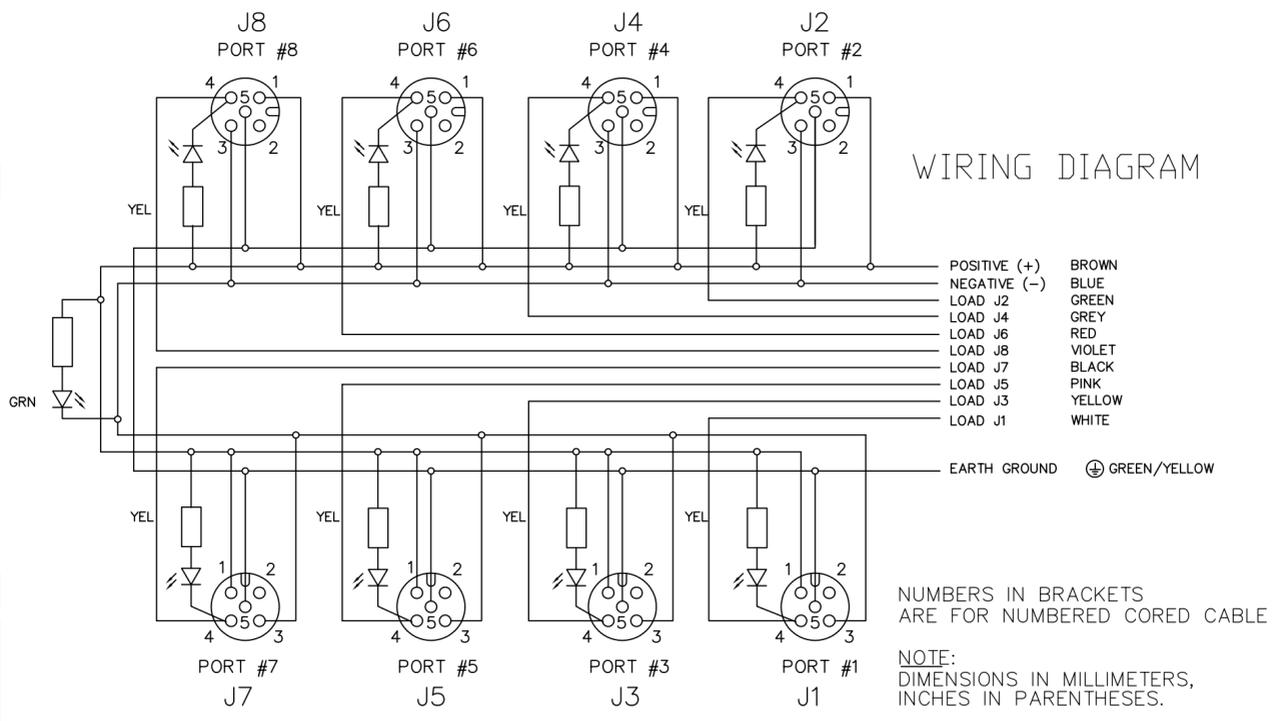
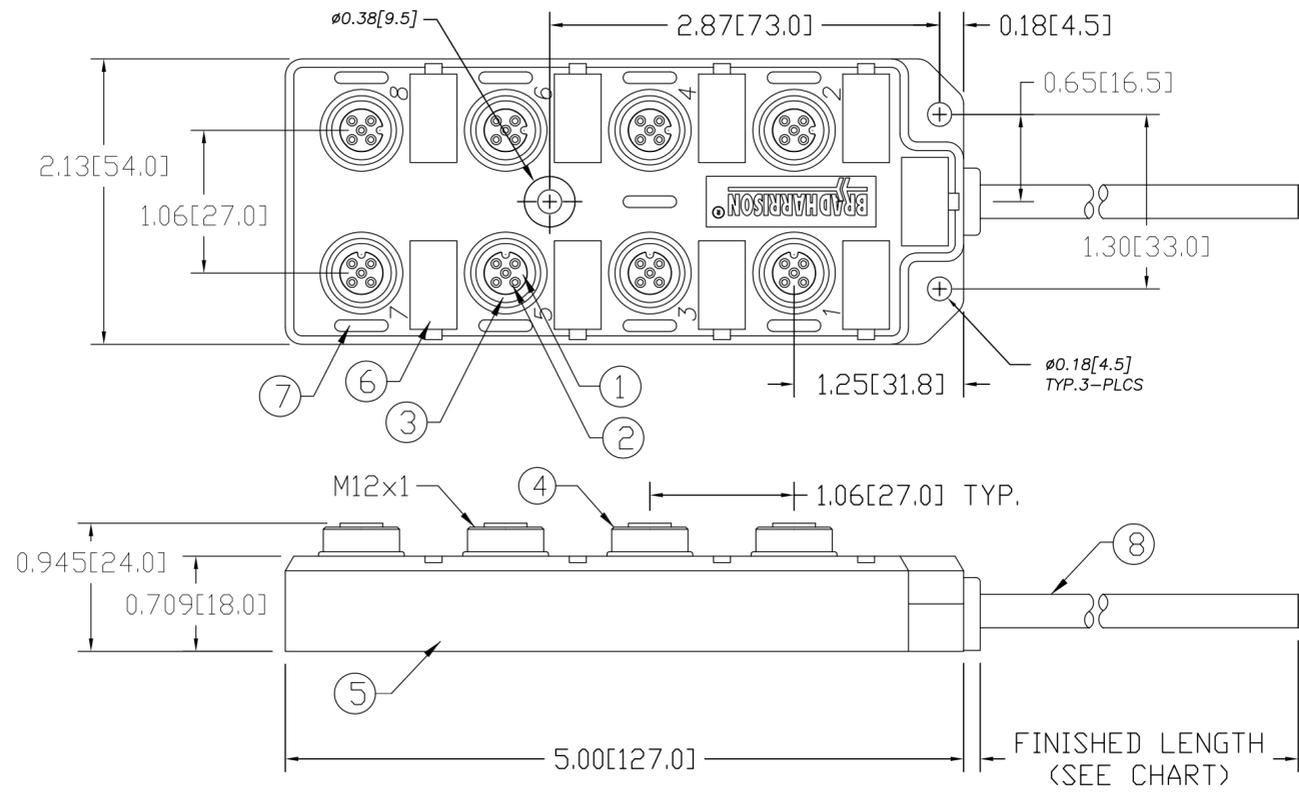


MATERIAL NUMBER	OLD PART NUMBER	FINISHED LENGTH	MATERIAL CABLE	CABLE COLOR
1201140062	BTY801N-FBE-10	32.81' +12.50" -0 [10.0M +317.5 -0]	PVC	YELLOW
1201140063	BTY801N-FBE-20	65.62' +24.50" -0 [20.0M +622.3 -0]	PVC	YELLOW
1201140064	BTY801N-FBP-05	16.40' +6.50" -0 [5.0M +165.1 -0]	PUR, HIGH FLEX	BLACK

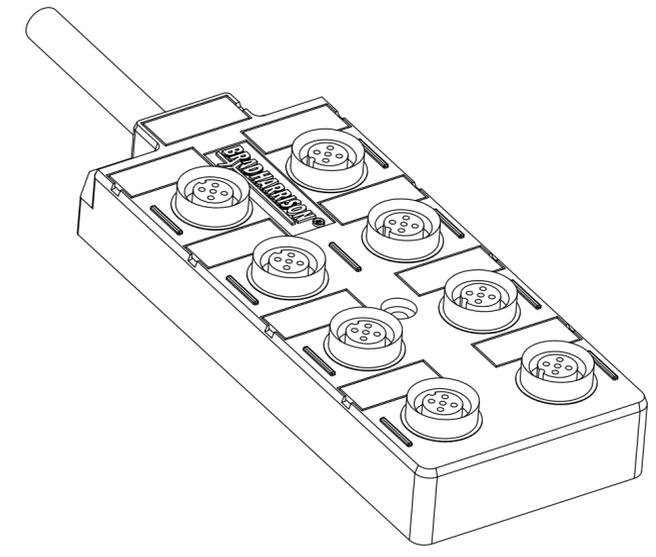

VOLTAGE RATING	10-30 VDC
AMPERAGE RATING PER PORT	4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 90°C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E46237
CSA CERTIFICATIONS	CSA CERTIFIED, FILE NO. LR6837

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	NYLON	BLACK
2	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	O-RING	VITON	RED
4	RECEPTACLE SHELL	BRASS	NICKEL PLATED
5	HOUSING	PBT	YELLOW
6	LABEL	ABS	WHITE
7	LENS	NYLON	CLEAR
8	CABLE, 18AWG, 3 CONDUCTOR, 22AWG, 8 CONDUCTOR, 300V	SEE TABLE	SEE TABLE




ADD 2 PINS TO TABLE EC NO: WEU2010-0441 DRWN: BBRAUCH 2010/03/17 CH'KD: FP APPR: FPACHER 2010/03/19	QUALITY SYMBOL	DESCRIPTION
	▽=0	
	∇=0	
	1	REV

GENERAL TOLERANCES (UNLESS SPECIFIED)	
	mm INCH
4 PLACES	±--- ±---
3 PLACES	±--- ±---
2 PLACES	±--- ±---
1 PLACE	±0.3 ±0.1
ANGULAR ±---°	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE	
IN/MM	
DRAWN BY	DATE
BBRAUCH	2010/03/17
CHECKED BY	DATE
FP	2010/03/17
APPROVED BY	DATE
FPACHER	2010/03/18
MATERIAL NO.	
SEE CHART	
SIZE	
C	

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
NTS	METRIC	
TITLE		
MICRO-CHANGE MPIS 8 PORT TOP MOUNT NPN #18/3 + #22/8 CABLE		
MOLEX INCORPORATED		
DOCUMENT NO.		SHEET NO.
SD-120114-061		1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

MATERIAL NUMBER	OLD PART NUMBER	FINISHED LENGTH	MATERIAL CABLE	CABLE COLOR
1201140062	BTY801N-FBE-10	32.81' +12.50" -0 [10.0M +317.5 -0]	PVC	YELLOW
1201140063	BTY801N-FBE-20	65.62' +24.50" -0 [20.0M +622.3 -0]	PVC	YELLOW
1201140064	BTY801N-FBP-05	16.40' +6.50" -0 [5.0M +165.1 -0]	PUR, HIGH FLEX	BLACK

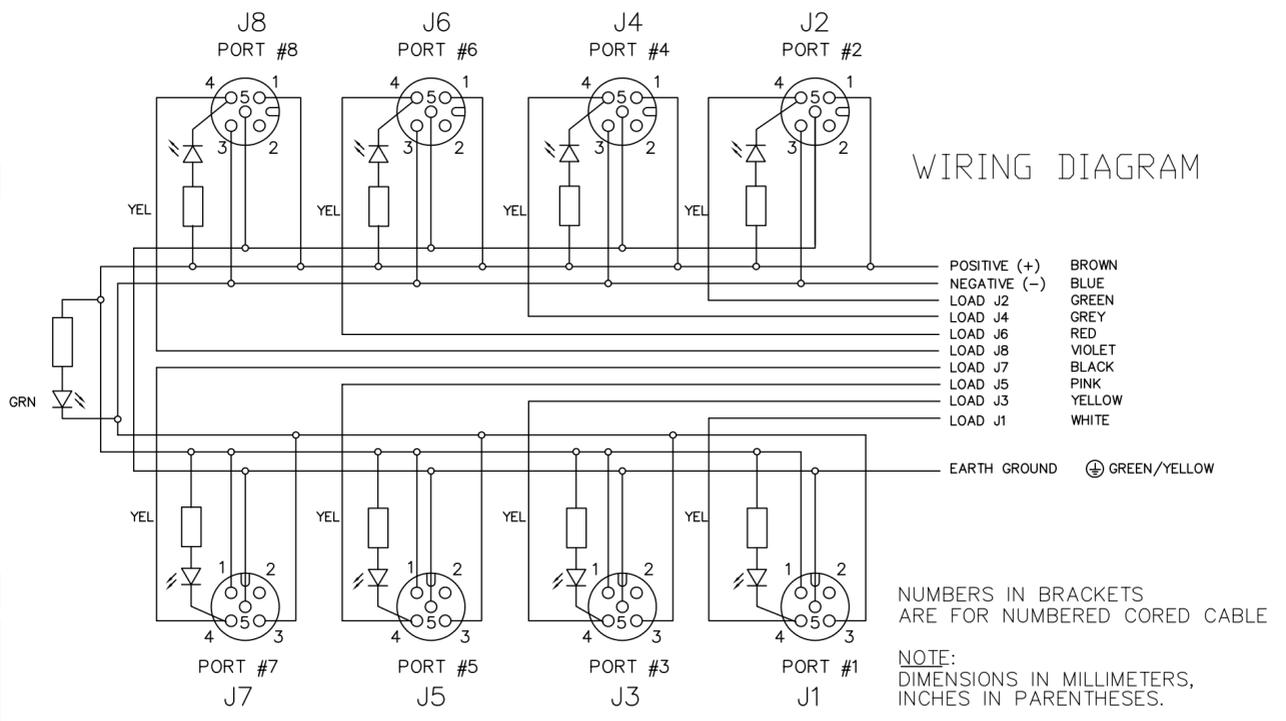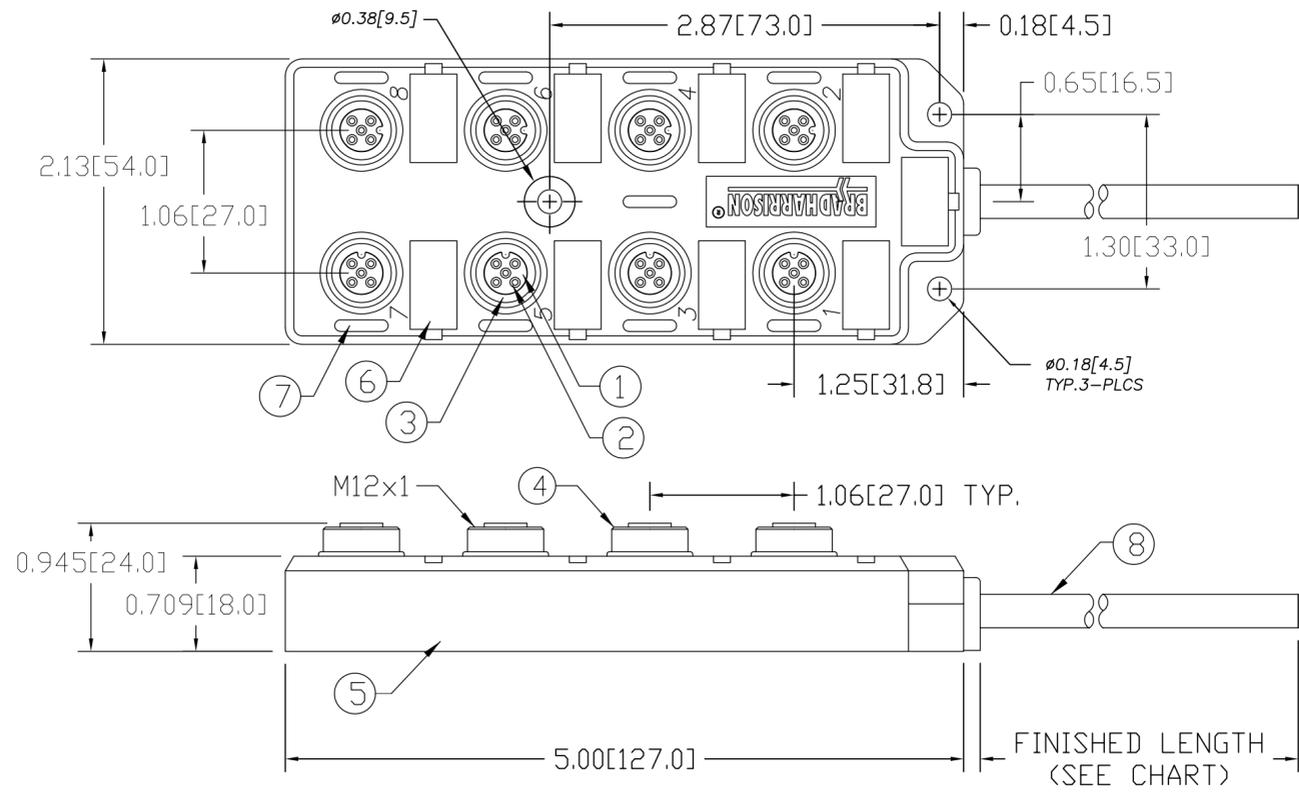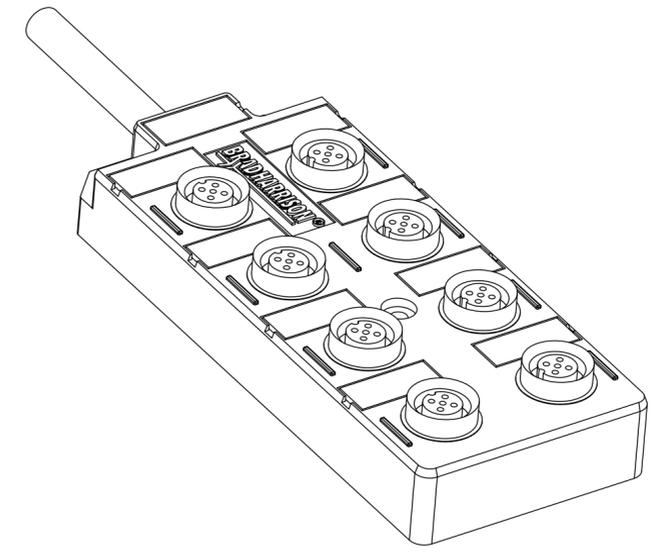

VOLTAGE RATING	10-30 VDC
AMPERAGE RATING PER PORT	4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 90°C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E46237
CSA CERTIFICATIONS	CSA CERTIFIED, FILE NO. LR6837

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	NYLON	BLACK
2	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	O-RING	VITON	RED
4	RECEPTACLE SHELL	BRASS	NICKEL PLATED
5	HOUSING	PBT	YELLOW
6	LABEL	ABS	WHITE
7	LENS	NYLON	CLEAR
8	CABLE, 18AWG, 3 CONDUCTOR, 22AWG, 8 CONDUCTOR, 300V	SEE TABLE	SEE TABLE

ADD 2 PINS TO TABLE EC NO: WEU2010-0441 DRWN: BBRAUCH 2010/03/17 CH'KD: FP APPR: FPACHER 2010/03/19	QUALITY SYMBOL	DESCRIPTION
	▽=0	
	∇=0	
	1	REV

GENERAL TOLERANCES (UNLESS SPECIFIED)	
	mm INCH
4 PLACES	±--- ±---
3 PLACES	±--- ±---
2 PLACES	±--- ±---
1 PLACE	±0.3 ±0.1
ANGULAR ±---°	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE	
IN/MM	
DRAWN BY	DATE
BBRAUCH	2010/03/17
CHECKED BY	DATE
FP	2010/03/17
APPROVED BY	DATE
FPACHER	2010/03/18
MATERIAL NO.	
SEE CHART	
SIZE	
C	

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
NTS	METRIC	
TITLE		
MICRO-CHANGE MPIS 8 PORT TOP MOUNT NPN #18/3 + #22/8 CABLE		
MOLEX INCORPORATED		
DOCUMENT NO.		SHEET NO.
SD-120114-061		1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		