



MAX6603 Evaluation Kit

Evaluates: MAX6603

General Description

The MAX6603 evaluation kit (EV kit) is an assembled and tested PC board that allows evaluation of the MAX6603 dual-channel, platinum resistive temperature devices (Pt-RTD) to voltage signal conditioner. The MAX6603 EV kit monitors two series-connected Pt-RTDs on channel 1. It excites and amplifies the signal from the Pt-RTDs to achieve a high-voltage, filtered signal on channel 1.

The EV kit comes with the MAX6603ATB+ installed.

Features

- ◆ Provides One 200 Ω Equivalent Pt-RTD
- ◆ Supports Two External Pt-RTDs
- ◆ Two Diagnostic LED Indicators
- ◆ Fully Assembled and Tested
- ◆ Includes Demo PC Board
- ◆ On-Board 5V Regulator
- ◆ Easy Access User Pads

Ordering Information

PART	TYPE	IC PACKAGE
MAX6603EVKIT	EV kit	10 TDFN-EP

Component List

DESIGNATION	QTY	DESCRIPTION
C1	1	0.1 μ F \pm 10%, 50V X7R ceramic capacitor (0603) TDK C1608X7R1H104K
C2–C5	4	0.01 μ F \pm 5%, 25V C0G ceramic capacitors (0603) TDK C1608C0G1E103J
C6, C7	0	Open (0603)
C8	1	10 μ F \pm 10%, 10V X5R ceramic capacitor (1210) TDK C3225X5R1A106K
D1	1	Schottky diode (3-pin SOT23) Central Semi CMPSH-3
D2	1	Zener diode, 6.2V, 500mW (2-pin SOD-123) Diodes Inc. MMSZ5234B

DESIGNATION	QTY	DESCRIPTION
JU1	1	3-pin header (gold contact finish)
JU2, JU3, JU4	3	2-pin headers (gold contact finish)
LED1, LED2	2	Red LEDs (0603) Panasonic LNJ208R8ARA
R1, R2	2	510 Ω \pm 5% resistors (0603)
RTD1, RTD2	2	100 Ω \pm 0.2% platinum RTDs Honeywell HEL-777-A-T-0 (plastic SIP)
U1	1	MAX6603ATB+ (10-pin TDFN-EP)
U2	1	MAX667ESA (8-pin SO)
—	4	Shunts (gold contact finish)

Component Suppliers

SUPPLIER	PHONE	WEBSITE
Central Semiconductor	631-435-1110	www.centalsemi.com
Diodes Incorporated	805-446-4800	www.diodes.com
TDK	847-803-6100	www.component.tdk.com

Note: Indicate you are using the MAX6603 when contacting these component suppliers.

MAX6603 Evaluation Kit

Quick Start

Required Equipment

Before you begin, you need the following equipment:

- Maxim MAX6603 EV kit
- 6V to 12V regulated DC supply

Procedure

- 1) Place the shunt on pins 1 and 2 of JU1 (VCC connects to the on-board 5V voltage regulator).
- 2) Place the shunts on JU2 and JU3 (LED1 and LED2 connect to $\overline{DG1}$ and $\overline{DG2}$, respectively).
- 3) Place the shunt on JU4 (Connects the on-board RTD1 and RTD2).
- 4) Connect the 6V to 12V DC supply to the HVIN(+) pad and GND(-) pad.
- 5) Verify LED1 is off and LED2 is on.
- 6) Verify the voltage on the OUT1 pad is approximately 1.10V at room temperature.

Detailed Description

Platinum-RTD

The MAX6603 EV kit includes two 100 Ω Pt-RTDs, configuration jumpers, diagnostic fault indicator LEDs, and a 5V voltage regulator. The two board-mounted 100 Ω Pt-RTDs are wired in series to form an equivalent 200 Ω Pt-RTD and connected to channel 1 only. The board-mounted Pt-RTDs can be electrically disconnected from the circuit allowing an external Pt-RTD to be connected to the MAX6603 through twisted-pair cabling. The two diagnostic indicator LEDs are driven by the MAX6603 $\overline{DG1}$ and $\overline{DG2}$ digital diagnostic outputs. The MAX6603 EV kit can be wired into a target system with appropriate jumper configurations and operate from the target system supply voltage (3.0V to 5.5V).

The MAX6603 EV kit can provide stand-alone evaluation by using the on-board 5V regulator and Pt-RTDs. Disconnect the on-board Pt-RTDs, LEDs, and 5V regulator to connect the MAX6603 EV kit directly to a target system.

Power-Supply Configuration

Connect a user supplied 6V to 12V supply to the HVIN(+) and GND(-) pads. Place the shunt on pin 1 and pin 2 of JU1 to use the on-board +5V regulator.

Place a shunt on pin 2 and pin 3 of JU1 to apply a user-supplied 3.0V to 5.5V power supply to VIN(+) and GND(-) pads. Table 1 shows the JU1 jumper settings.

Table 1. External/On-Board Power-Supply Selection

JUMPER	SHUNT POSITION	DESCRIPTION
JU1	1-2*	Apply a user-supplied 6V to 12V supply to HVIN.
	2-3	Apply a user-supplied 3.0V to 5.5V supply to VIN.

*Default position.

Fault Detection

The $\overline{DG1}$ and $\overline{DG2}$ pins are the diagnostic signal outputs for the RS1 and RS2 inputs, respectively. The $\overline{DG1}$ and $\overline{DG2}$ pins assert low upon fault detection. Refer to the MAX6603 IC data sheet for fault detection conditions. If the shunt is placed on JU2 (as shown in Table 2), LED1 lights up when $\overline{DG1}$ is asserted low. If the shunt is placed on JU3 (as shown in Table 3), LED2 lights up when $\overline{DG2}$ is asserted low.

Table 2. LED1 Connection

JUMPER	SHUNT POSITION	DESCRIPTION
JU2	1-2*	LED1 connected to the $\overline{DG1}$ pin.
	No shunt	LED1 disconnected from the $\overline{DG1}$ pin.

*Default position.

Table 3. LED2 Connection

JUMPER	SHUNT POSITION	DESCRIPTION
JU3	1-2*	LED2 connected to the $\overline{DG2}$ pin.
	No shunt	LED2 disconnected from the $\overline{DG2}$ pin.

*Default position.

MAX6603 Evaluation Kit

On-Board RTD Connection

The MAX6603EVKIT has two on-board 100Ω Pt-RTDs. Place the shunt on JU4 (as shown in Table 4) to connect the 200Ω equivalent Pt-RTD to the input channel RS1. Remove the shunt to apply the external Pt-RTD.

Table 4. Jumper Settings

JUMPER	SHUNT POSITION	DESCRIPTION
JU4	1-2*	On-board Pt-RTDs connected to channel RS1.
	No shunt	On-board Pt-RTDs disconnected from channel RS1. Apply external Pt-RTDs.

*Default position.

Evaluates: MAX6603

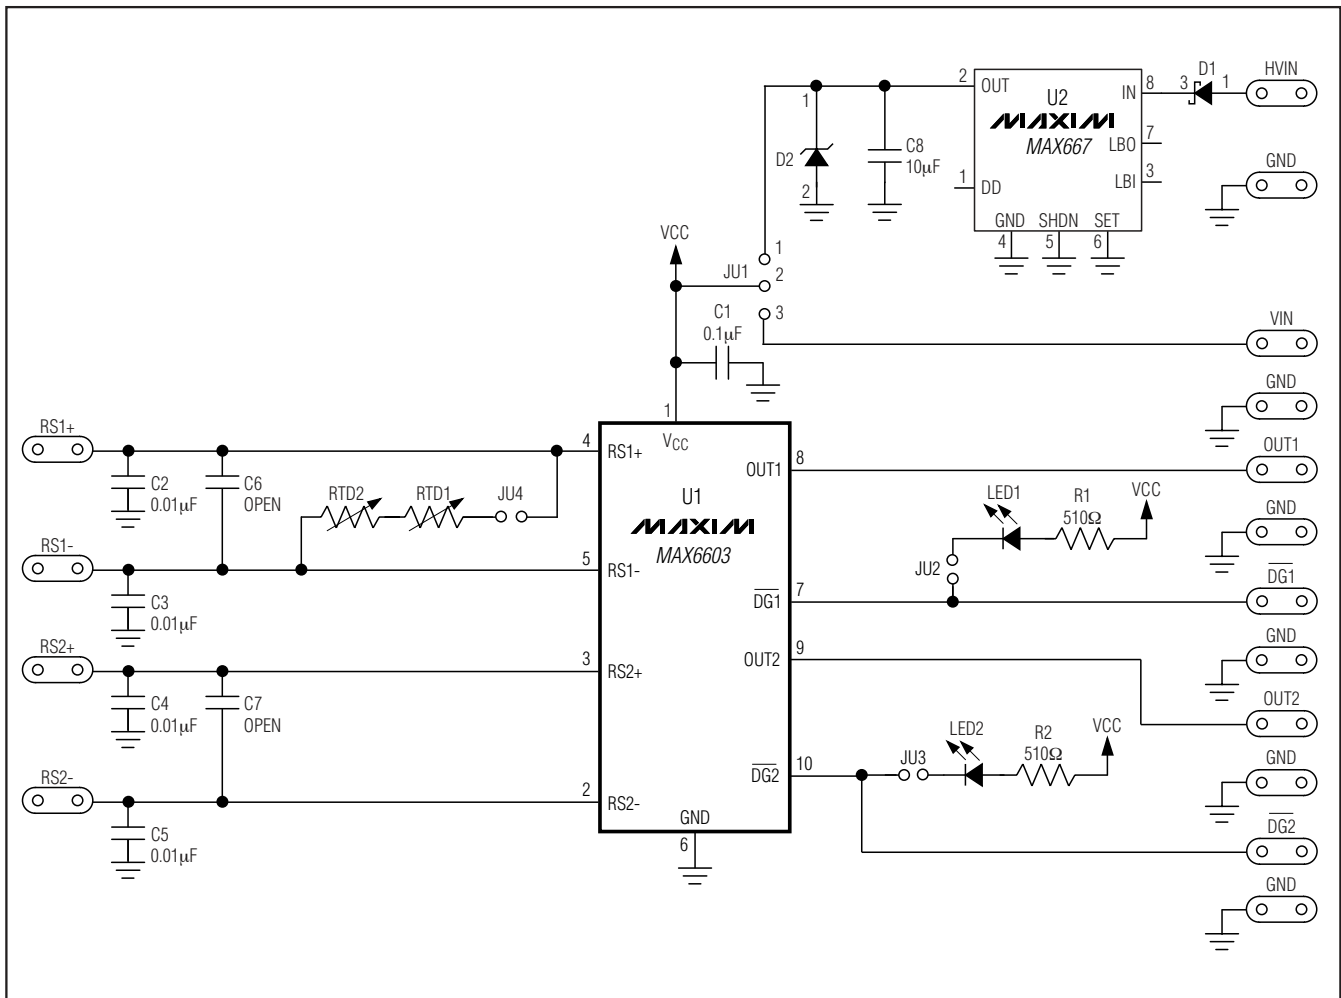


Figure 1. MAX6603 EV Kit Schematic

MAX6603 Evaluation Kit

Evaluates: MAX6603

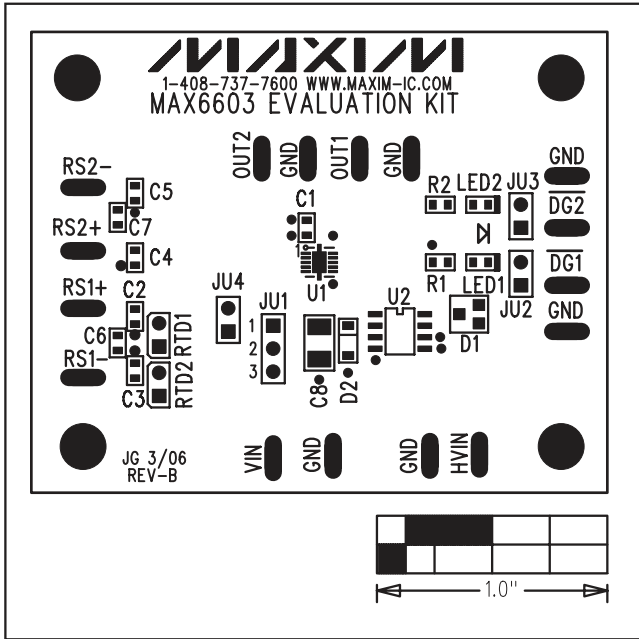


Figure 2. MAX6603 EV Kit Component Placement Guide—Component Side

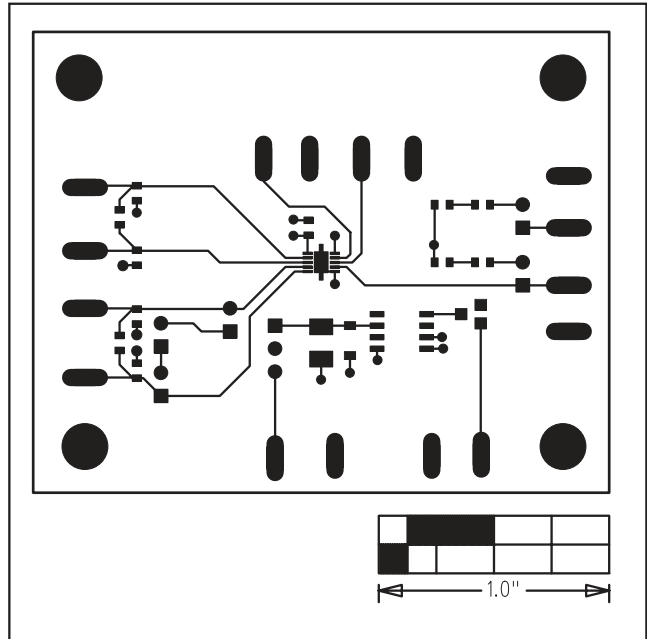


Figure 3. MAX6603 EV Kit PC Board Layout—Component Side

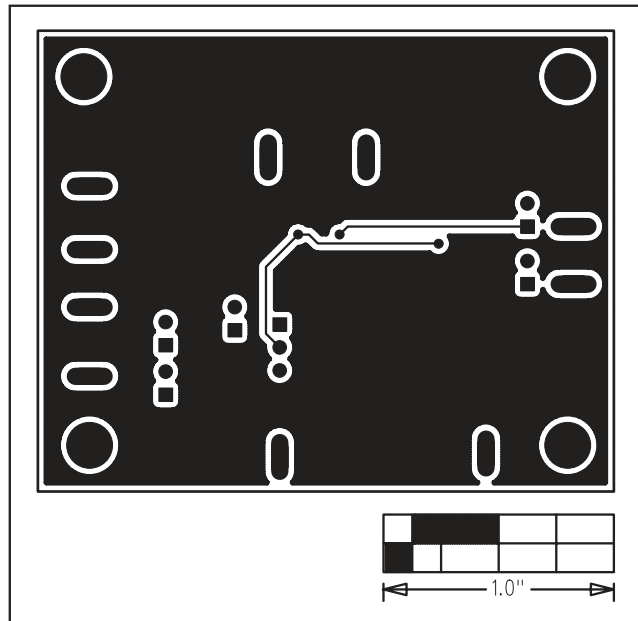


Figure 4. MAX6603 EV Kit PC Board Layout—Solder Side

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

4 _____ **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**