

# User Manual IPS-354


Version 1.5 – 30.07.2020

## PRODUCT FAMILY

K-Band Transceiver


## APPLICATIONS

- Door Opener
- Industrial Applications



## FEATURES:

- radar-based motion detector working in the 24GHz - ISM - Band
- split transmit and receive path for maximum gain
- IF-pre-amplifier, bandwidth limited for lowest noise performance
- stereo (dual channel) operation for direction of motion identification
- compact outline dimensions

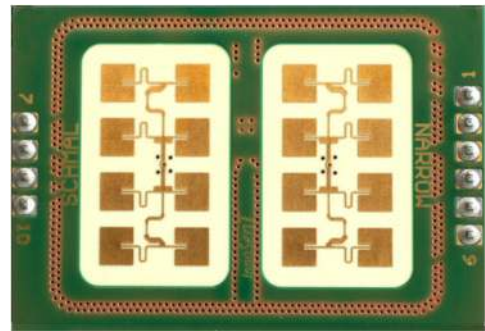

## DESCRIPTION

The IPS-354 is a K-Band Transceiver with a split transmit and receive antenna.

Certificates available on request

## CERTIFICATES

InnoSenT GmbH has established and applies a quality system for: development, production and sales of radar sensors for industrial and automotive sensors. More information on our quality standards:

<https://www.innosent.de/en/company/certifications/>

## ADDITIONAL INFORMATION

InnoSenT Standard Product. Changes will not be notified as long as there is no influence on form, fit and within this data sheet specified function of the product.

## RoHS-INFO

This product is compliant to the restriction of hazardous substances (RoHS - European Union directive 2011/65/EU).

### CONFIDENTIAL AND PROPRIETARY

The information contained in this document shall remain the sole and exclusive property of InnoSenT GmbH and shall not be disclosed by the recipient to third parties without prior consent of InnoSenT in writing.

## ELECTRICAL CHARACTERISTICS



PARAMETER	CONDITIONS	SYMBOL	MIN	TYP	MAX	UNITS
<b>Transmitter</b>						
transmit frequencies	frequency band for US and EU	$f_{IPS-354}$	24.150		24.250	GHz
oscillator temperature drift (frequency)	-30 °C ... + 60 °C			- 400		kHz/°C
output power (EIRP)		$P_{out}$		11.7	12.7	dBm
transmitter turn on time				10		μs
antenna gain		$G_A$		12		dBi
<b>Receiver</b>						
antenna gain		$G_A$		12		dBi
conversion gain		$G_c$	22	27	35	dB
IF-Bandwidth (-3dB)		$B$	DC		60	kHz
IF output impedance		$Z_{IF}$		100		Ω
IF-signal amplitude (RMS)	(RCS = 0.5 m <sup>2</sup> , distance 10 m)	IF		200		μV
noise level (RMS)	100 Hz ... 60 kHz	$N_{1/2}$		35		μV
IF voltage offset		$IF_{DC-offset}$	1	2,5	4	V
[I/Q] imbalance amplitude			-3		+3	dB
IQ-phase			60	90	120	°
supply voltage		$V_{cc}$	4.25	5.0	5.75	V
supply current—active	enable = low	$I_{cc}$		48	60	mA
supply current—inactive	enable = high	$I_{cc\_off}$		200	500	mA
<b>Environment</b>						
operating temperature		$T_{OP}$	- 30		+ 60	°C
storage temperature		$T_{STG}$	- 30		+ 60	°C
<b>Mechanical Outlines</b>						
outline dimensions	compare drawing	Height Length Width		8.3 (19) 44.0 30.0		mm

**CONFIDENTIAL AND PROPRIETARY**

The information contained in this document shall remain the sole and exclusive property of InnoSenT GmbH and shall not be disclosed by the recipient to third parties without prior consent of InnoSenT in writing.

### ANTENNA PATTERN

Antenna Orientation:

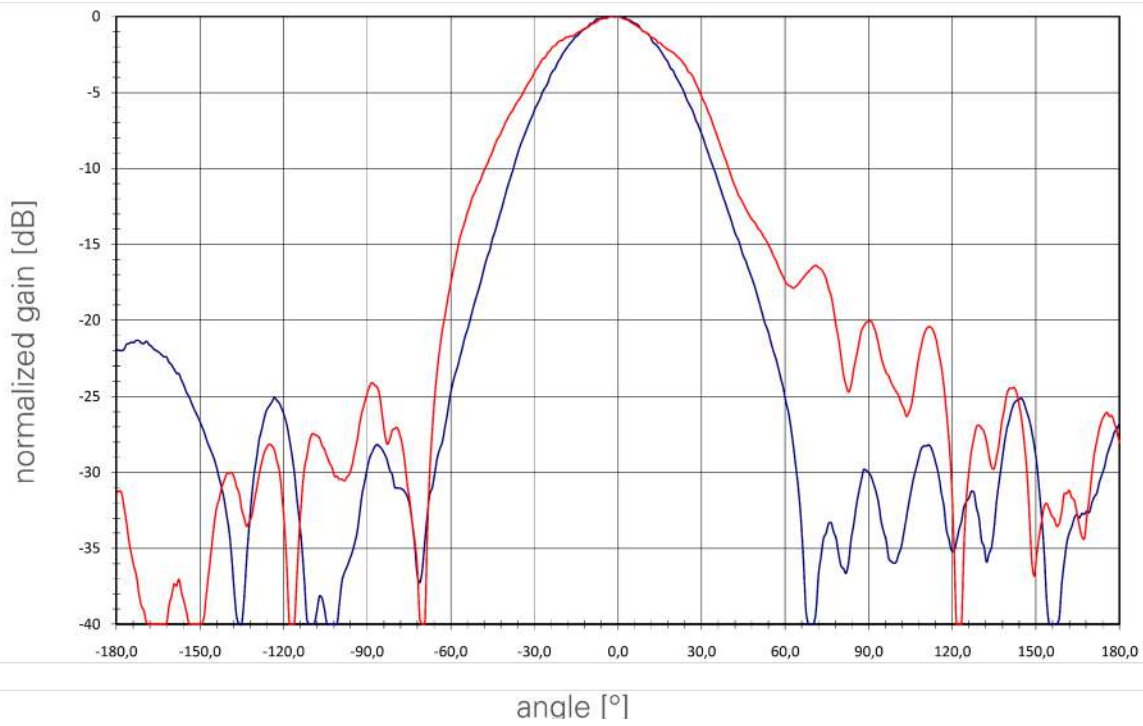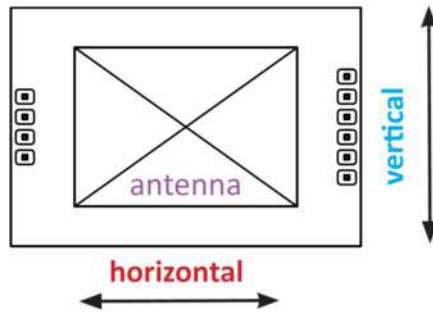


PARAMETER	CONDITIONS	SYMBOL	MIN	TYP	MAX	UNITS
full beam width @ -3 dB		horizontal		45		°
		vertical		38		°
side-lobe suppression		horizontal		15		dB
		vertical		20		dB

**CONFIDENTIAL AND PROPRIETARY**

The information contained in this document shall remain the sole and exclusive property of InnoSenT GmbH and shall not be disclosed by the recipient to third parties without prior consent of InnoSenT in writing.

## INTERFACE


The sensor provides a 2.54 mm grid, single row pin header (square pin  0.635 mm).

PIN #	DESCRIPTION	IN/OUT	COMMENT
1	d.n.c.		do not connect
2	enable	input	active low, the enable pin is used to switch off the power supply of the transceiver enable on: 0 — 0.8 V enable off: 2.8 — 3.3 V
3	V <sub>cc</sub>	input	supply voltage, 5 V +/- 15 %
4	GND	input	analog ground
5	IF1	output	signal I (nphase)
6	IF2	output	signal Q (uadrature)
7	d.n.c.		do not connect
8	d.n.c.		do not connect
9	GND	output	analog ground
10	d.n.c.		do not connect

### CONFIDENTIAL AND PROPRIETARY

The information contained in this document shall remain the sole and exclusive property of InnoSenT GmbH and shall not be disclosed by the recipient to third parties without prior consent of InnoSenT in writing.

MECHANICAL DRAWING

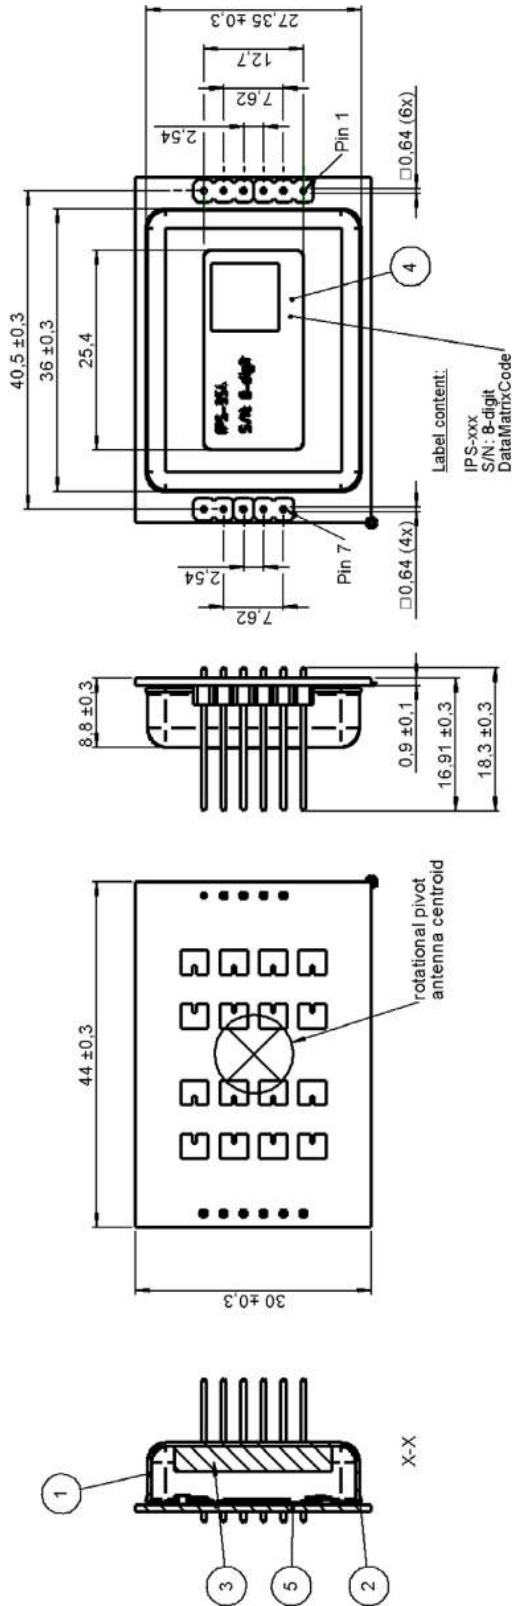

**CONFIDENTIAL AND PROPRIETARY**

The information contained in this document shall remain the sole and exclusive property of InnoSenT GmbH and shall not be disclosed by the recipient to third parties without prior consent of InnoSenT in writing.

#### Annex A

The information that will be given below is only a rough overview; for details please contact the local approval agencies. An overview over the frequency bands in Europe can also be found in the REC 70-03 (Annex 6) which is available under [www.ero.dk](http://www.ero.dk)

#### Frequency Bands in US FCC 15.249

For the US-market the IPS-354 can be used

US-frequency: 24.000 GHz —24.250 GHz

#### FCC approval

This device complies with Part 15 of the FCC Rules and with RSS-310 of Industry Canada. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications made to this equipment not expressly approved by InnoSenT GmbH may void the FCC authorization to operate this equipment.

Manufacturers of mobile or fixed devices incorporating IPS-354 Modules are authorized to use the FCC Grants for their own final products according to the conditions referenced in these documents. In this case, the FCC label of the module shall be visible from the outside, or the host device shall bear a second label stating „Contains FCC ID: UXS-IPS354“.

#### **CONFIDENTIAL AND PROPRIETARY**

The information contained in this document shall remain the sole and exclusive property of InnoSenT GmbH and shall not be disclosed by the recipient to third parties without prior consent of InnoSenT in writing.

## ESD-INFORMATION



This InnoSenT sensor is sensitive to damage from ESD. Normal precautions as usually applied to CMOS devices are sufficient when handling the device. Touching the signal output pins has to be avoided at any time before soldering or plugging the device into a motherboard.

## APPROVAL

This Data Sheet contains the technical specifications of the described product. Changes of the specification must be in written form. All previous versions of this Data Sheet are no longer valid.

The sensor uses Hydrocarbon based material which may change its dielectric properties when used in an oxidative environment. This may vary based on temperature. Therefore InnoSenT recommends evaluating this influence within the specific environment.

VERSION	DATE	COMMENT	DAWN	RELEASED
1.0	05.12.2018	initial release	FZ	BL
1.1	19.02.2019	small changes in pin description	FZ	MW
1.2	06.05.2019	transfer to publisher	NF	WH
1.3	12.06.2019	added electrical characteristics	NF	TL
1.4	13.12.2019	update mechanical design	NF	WH
1.5	30.07.2020	new layout		

### InnoSenT GmbH

Am Roedertor 30

97499 Donnersdorf

GERMANY

Tel.: +49 (0) 9528-9518-0

E-Mail: [info@innosent.de](mailto:info@innosent.de)

URL: [www.innosent.de](http://www.innosent.de)

### CONFIDENTIAL AND PROPRIETARY

The information contained in this document shall remain the sole and exclusive property of InnoSenT GmbH and shall not be disclosed by the recipient to third parties without prior consent of InnoSenT in writing.