

# TMR136x

## NanoAmpere Fast Response Omnipolar Magnetic Switch Sensor

### Description

TMR136x is an omnipolar magnetic switch integrated the tunnel magnetoresistance (TMR) magnetic sensor and CMOS circuitry, which is able to detect the change of magnetic field and output high and low voltage signals for high accuracy position detection.

As the time-sharing power supply version of the TMR130x series, TMR136x series sensor provide average supply current as low as 200 nA and maintaining the switching frequency of the magnetic signal is 50 Hz. Compared with Hall/AMR sensors that also use power-cycling mode, the switching frequency of TMR136x is several times higher, and the average supply current is only a fraction of that of Hall/AMR sensor products.

TMR136x allows a wide range of operating supply voltages from 1.8 V to 5.5 V with excellent temperature characteristics, and can meet the requirements of most applications.


TMR136x is available in three compact SOT23-3, TO92S and LGA3L (2 mm × 1.5 mm × 0.63 mm) packages.

### Features and benefits

- Tunneling magnetoresistance (TMR) technology
- Ultra-low power consumption at 200 nA
- Fast Switching Frequency at 50 Hz
- Omnipolar operation
- Wide range supply voltages: 1.8 V to 5.5 V
- CMOS push-pull output
- High sensitivity
- Excellent temperature stability
- High tolerance to external magnetic field interference
- RoHS & REACH compliant

### Applications

- Utility meters: water, gas, and heat meters
- Proximity switches
- Speed sensing
- Linear and rotation position sensing
- Wake-up switch

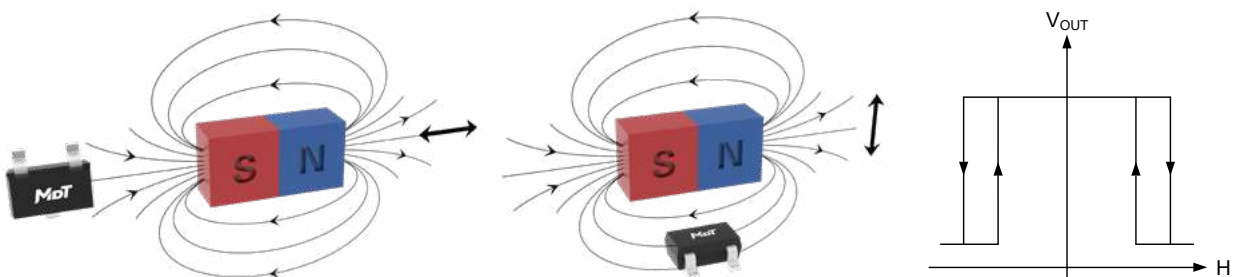

## Selection Guide

Part Number	Supply Current	Switching frequency	Operating Ambient Temperature	Operating Point	Release Point	Package	Packing Form
TMR1362S	200 nA	50 Hz	-40 °C to 125 °C	±17 Gs	±12 Gs	SOT23-3	Tape & Reel
TMR1362T	200 nA	50 Hz	-40 °C to 125 °C	±17 Gs	±12 Gs	TO92S	ESD Bag
TMR1362G	200 nA	50 Hz	-40 °C to 125 °C	±17 Gs	±12 Gs	LGA3L	Tape & Reel
TMR1363S	200 nA	50 Hz	-40 °C to 125 °C	±30 Gs	±23 Gs	SOT23-3	Tape & Reel
TMR1365S	200 nA	50 Hz	-40 °C to 125 °C	±45 Gs	±35 Gs	SOT23-3	Tape & Reel
TMR1366S	200 nA	50 Hz	-40 °C to 125 °C	±7 Gs	±5 Gs	SOT23-3	Tape & Reel
TMR1366T	200 nA	50 Hz	-40 °C to 125 °C	±7 Gs	±5 Gs	TO92S	ESD Bag
TMR1366G	200 nA	50 Hz	-40 °C to 125 °C	±7 Gs	±5 Gs	LGA3L	Tape & Reel

Note: Please contact MultiDimension Technology local sales for customizing operating and release points.

## Catalogue

1. Functional Block Diagram.....	03
2. Switching Characteristics .....	03
3. Pin Configuration .....	03
4. Absolute Maximum Ratings .....	04
5. Electrical Specifications.....	04
6. Magnetic Specifications.....	05
7. Typical Supply Voltage Characteristics.....	06
8. Typical Temperature Characteristics .....	07
9. Application Information .....	08
10. Dimensions.....	09

## 1. Functional Block Diagram

TMR136x series switch chips are composed of TMR sensors and signal processing circuits. The TMR sensor detects external magnetic field, generates an analog voltage signal, and outputs a logical switch level after processing by the circuits as shown in Figure 1.

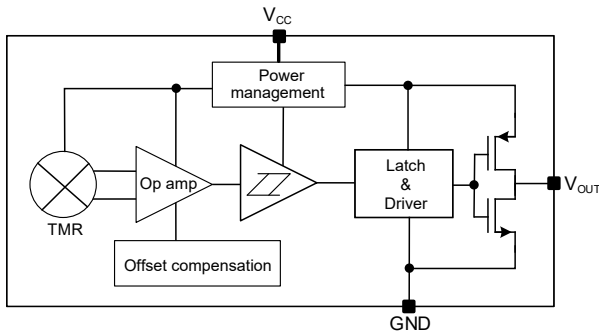


Figure 1. Block diagram

## 2. Switching Characteristics

The Figure 2 shows the sensing direction is parallel to the silkscreen surface of the package as shown by the arrow.

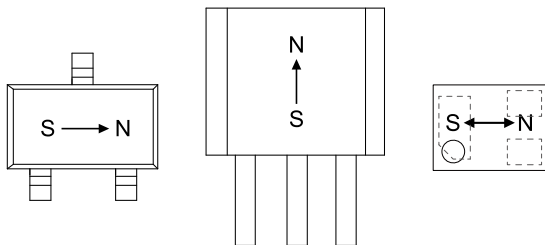


Figure 2. Sensing direction

The output is “High”, when power is on at zero magnetic field.  $B$  is the external magnetic field along the sensing direction,  $B_{OPS}$  ( $B_{OPN}$ ) is the operating point,  $B_{RPS}$  ( $B_{RPN}$ ) is the release point, and hysteresis  $B_H$  is define as the difference between  $B_{OPS}$  and  $B_{RPS}$  ( $B_{OPN}$  and  $B_{RPN}$ ).

The sensor outputs a low level, when the magnetic field along the sensing axis exceeds the operate point  $B_{OPS}$  ( $B_{OPN}$ ), and the device outputs a high level, when the magnetic field is reduced below the release point  $B_{RPS}$  ( $B_{RPN}$ ) as shown in Figure 3.

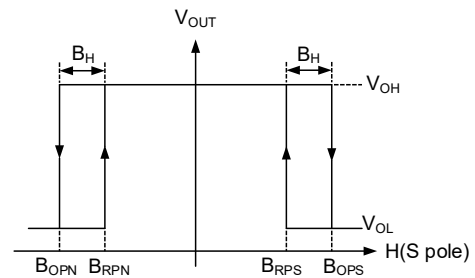


Figure 3. Switching characteristics

## 3. Pin Configuration

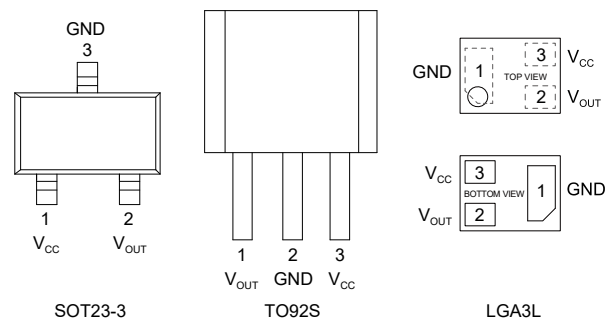


Figure 4. Pin configuration

Pin Number			Name	Function
SOT23-3	TO92S	LGA3L		
1	3	3	$V_{CC}$	Power supply
2	1	2	$V_{OUT}$	Output
3	2	1	GND	Ground

## 4. Absolute Maximum Ratings

Parameters	Symbol	Min.	Max.	Unit	Applicable Part Number
Supply voltage	$V_{CC}$	-0.3	7	V	All parts
Output current	$I_{SINK}$ and $I_{SOURCE}$	-	9	mA	All parts
Magnetic flux density	B	-	4000	Gs	All parts
ESD performance (HBM)	$V_{ESD}$	-	4	kV	All parts
Operating ambient temperature	$T_A$	-40	125	°C	All parts
Storage ambient temperature	$T_{STG}$	-50	150	°C	All parts

Note:  $I_{SINK}$  is the current flowing through the high side MOSFET, when the high side MOSFET is turned on, and  $I_{SOURCE}$  is the current flowing through the low side MOSFET when the low side MOSFET is turned on.

## 5. Electrical Specifications

$V_{CC} = 3\text{ V}$ ,  $T_A = 25\text{ °C}$ , a  $0.1\text{ }\mu\text{F}$  capacitor is connected between  $V_{CC}$  and GND

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit	Applicable Part Number
Supply voltage	$V_{CC}$	operating	1.8	3.0	5.5	V	All parts
Output high voltage	$V_{OH}$	RP status	$V_{CC}-0.3$	-	$V_{CC}$	V	All parts
Output low voltage	$V_{OL}$	OP status	0	-	0.2	V	All parts
Supply current	$I_{CC}$	output open	-	200	-	nA	All parts
Switching frequency	F	-	50			Hz	All parts

## 6. Magnetic Specifications

$V_{CC} = 3\text{ V}$ ,  $T_A = 25\text{ }^\circ\text{C}$ , a  $0.1\text{ }\mu\text{F}$  capacitor is connected between  $V_{CC}$  and GND

### TMR1362

Parameter	Symbol	Min.	Typ.	Max.	Unit
Operate point	$B_{OPS}$	-	17	-	Gs
	$B_{OPN}$	-	-17	-	Gs
Release point	$B_{RPS}$	-	12	-	Gs
	$B_{RPN}$	-	-12	-	Gs
Hysteresis	$B_H$	-	5	-	Gs

### TMR1363

Parameter	Symbol	Min.	Typ.	Max.	Unit
Operate point	$B_{OPS}$	-	30	-	Gs
	$B_{OPN}$	-	-30	-	Gs
Release point	$B_{RPS}$	-	23	-	Gs
	$B_{RPN}$	-	-23	-	Gs
Hysteresis	$B_H$	-	7	-	Gs

### TMR1365

Parameter	Symbol	Min.	Typ.	Max.	Unit
Operate point	$B_{OPS}$	-	45	-	Gs
	$B_{OPN}$	-	-45	-	Gs
Release point	$B_{RPS}$	-	35	-	Gs
	$B_{RPN}$	-	-35	-	Gs
Hysteresis	$B_H$	-	10	-	Gs

### TMR1366

Parameter	Symbol	Min.	Typ.	Max.	Unit
Operate point	$B_{OPS}$	-	7	-	Gs
	$B_{OPN}$	-	-7	-	Gs
Release point	$B_{RPS}$	-	5	-	Gs
	$B_{RPN}$	-	-5	-	Gs
Hysteresis	$B_H$	-	2	-	Gs

## 7. Typical Supply Voltage Characteristics

TMR136x Supply Voltage Characteristics

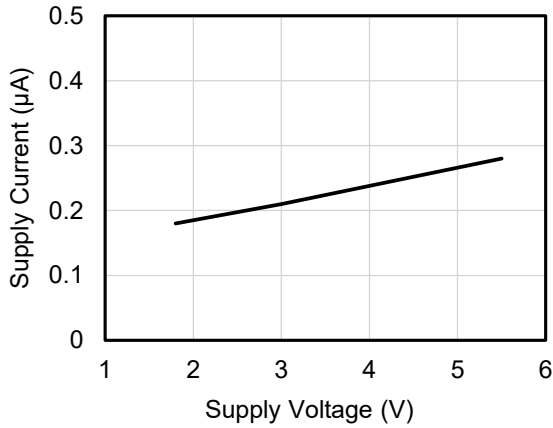


Figure 5. Supply current versus supply voltage ( $T_A=25^\circ\text{C}$ )

TMR1362 Supply Voltage Characteristics

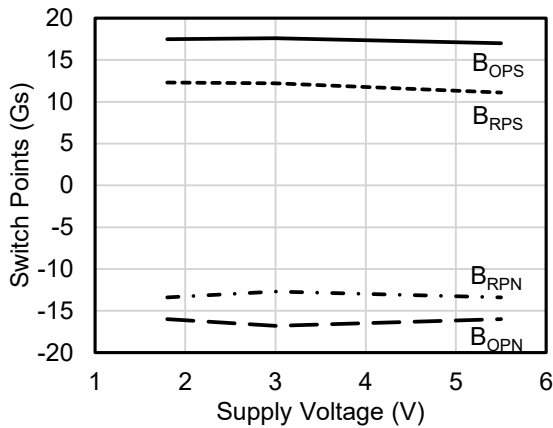


Figure 6. Switch points versus supply voltage ( $T_A=25^\circ\text{C}$ )

TMR1363 Supply Voltage Characteristics

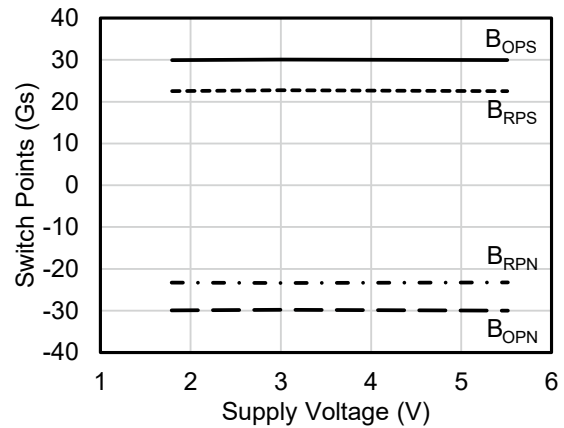


Figure 7. Switch points versus supply voltage ( $T_A=25^\circ\text{C}$ )

TMR1365 Supply Voltage Characteristics

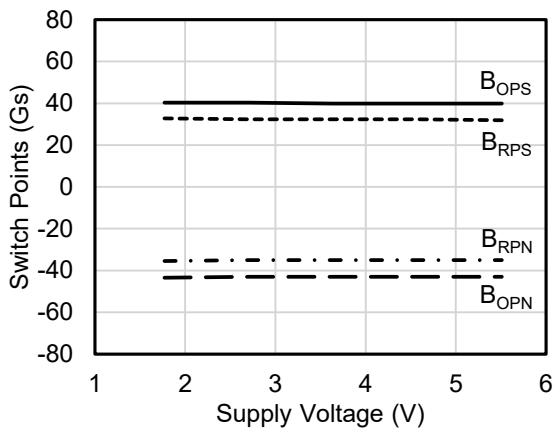


Figure 8. Switch points versus supply voltage ( $T_A=25^\circ\text{C}$ )

TMR1366 Supply Voltage Characteristics

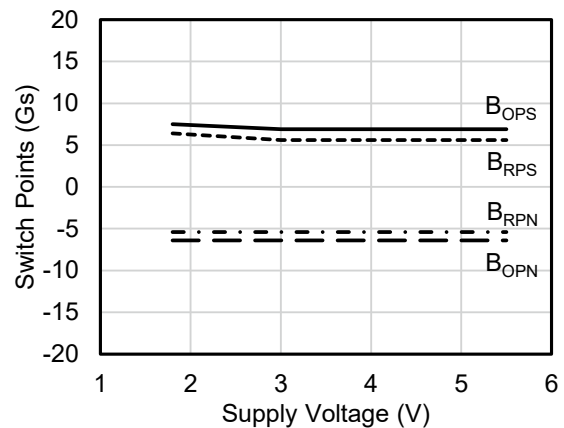


Figure 9. Switch points versus supply voltage ( $T_A=25^\circ\text{C}$ )

## 8. Typical Temperature Characteristics

TMR136x Temperature Characteristics

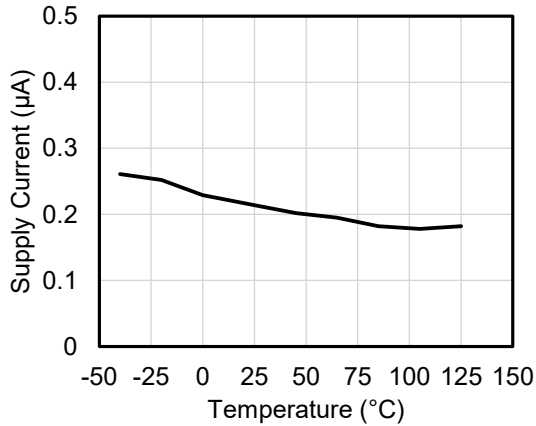


Figure 10. Supply current versus temperature ( $V_{CC} = 3\text{ V}$ )

TMR1362 Temperature Characteristics

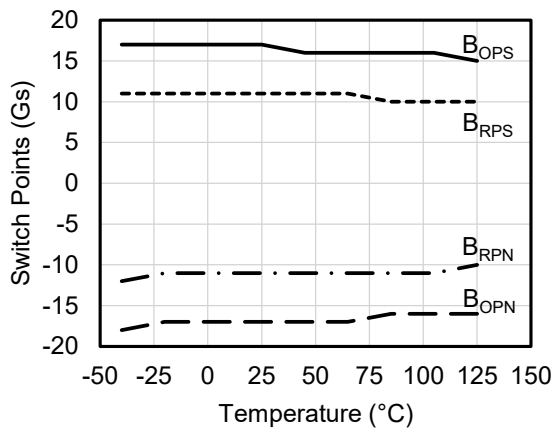


Figure 11. Switch points versus temperature ( $V_{CC} = 3\text{ V}$ )

TMR1363 Temperature Characteristics

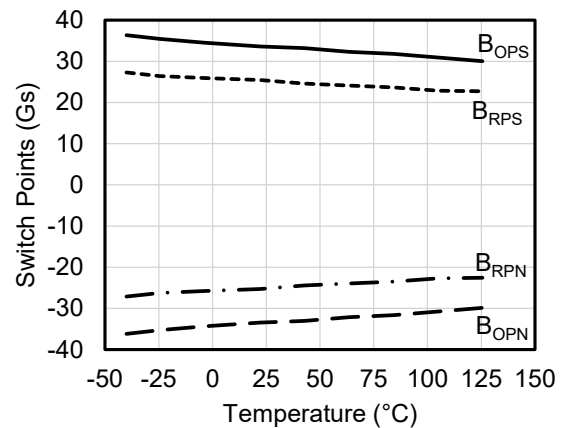


Figure 12. Switch points versus temperature ( $V_{CC} = 3\text{ V}$ )

TMR1365 Temperature Characteristics

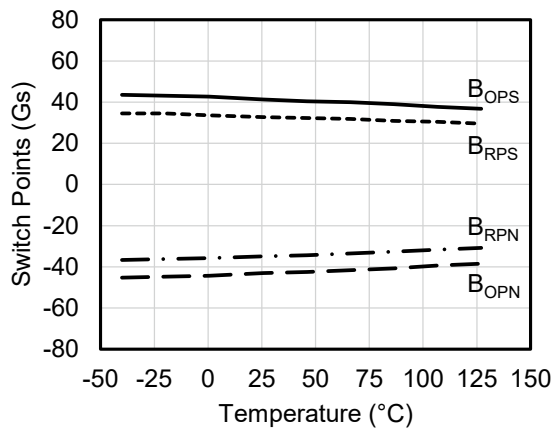


Figure 13. Switch points versus temperature ( $V_{CC} = 3\text{ V}$ )

TMR1366 Temperature Characteristics

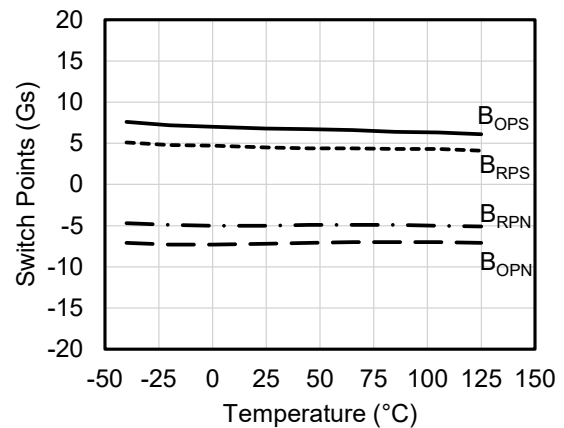


Figure 14. Switch points versus temperature ( $V_{CC} = 3\text{ V}$ )

## 9. Application Information

It is recommended to add a filter capacitor between the sensor power supply and ground (close to the sensor) to reduce external noise. As shown in Figure 15, the typical value is 0.1  $\mu\text{F}$ .

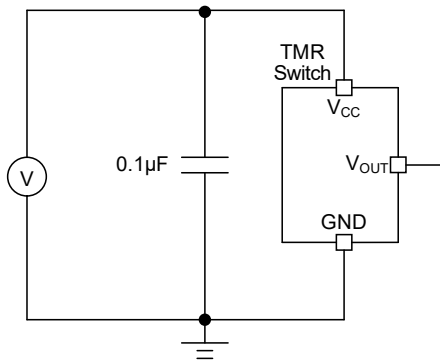


Figure 15. Application circuit diagram

The TMR136x series sensor chips are not suitable for driving power loads. The general method of use is utilizing the output voltage of V<sub>OUT</sub> pin as a signal to input the MCU or drive a triode or MOS as shown in Figure 16.

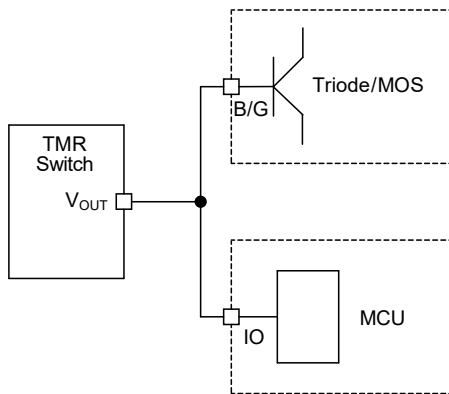


Figure 16. Application diagram for driving power load

Common failure conditions:

- The supply voltage exceeds the limit of absolute maximum ratings
- Absence of matching filter capacitor to power supply when the power supply is unstable, which can cause the product to restart repeatedly
- Using switch output V<sub>OUT</sub> to control high-power relays, etc., and cause I<sub>SINK</sub> and I<sub>SOURCE</sub> exceeding the limit of absolute maximum ratings
- The external magnetic field exceeds the limit of absolute maximum ratings
- Operating in a humid environment for a long time, causing vapor penetration and increased power consumption
- Overheating when soldering
- Over bending of pins



## 10. Dimensions

### SOT23-3 Package

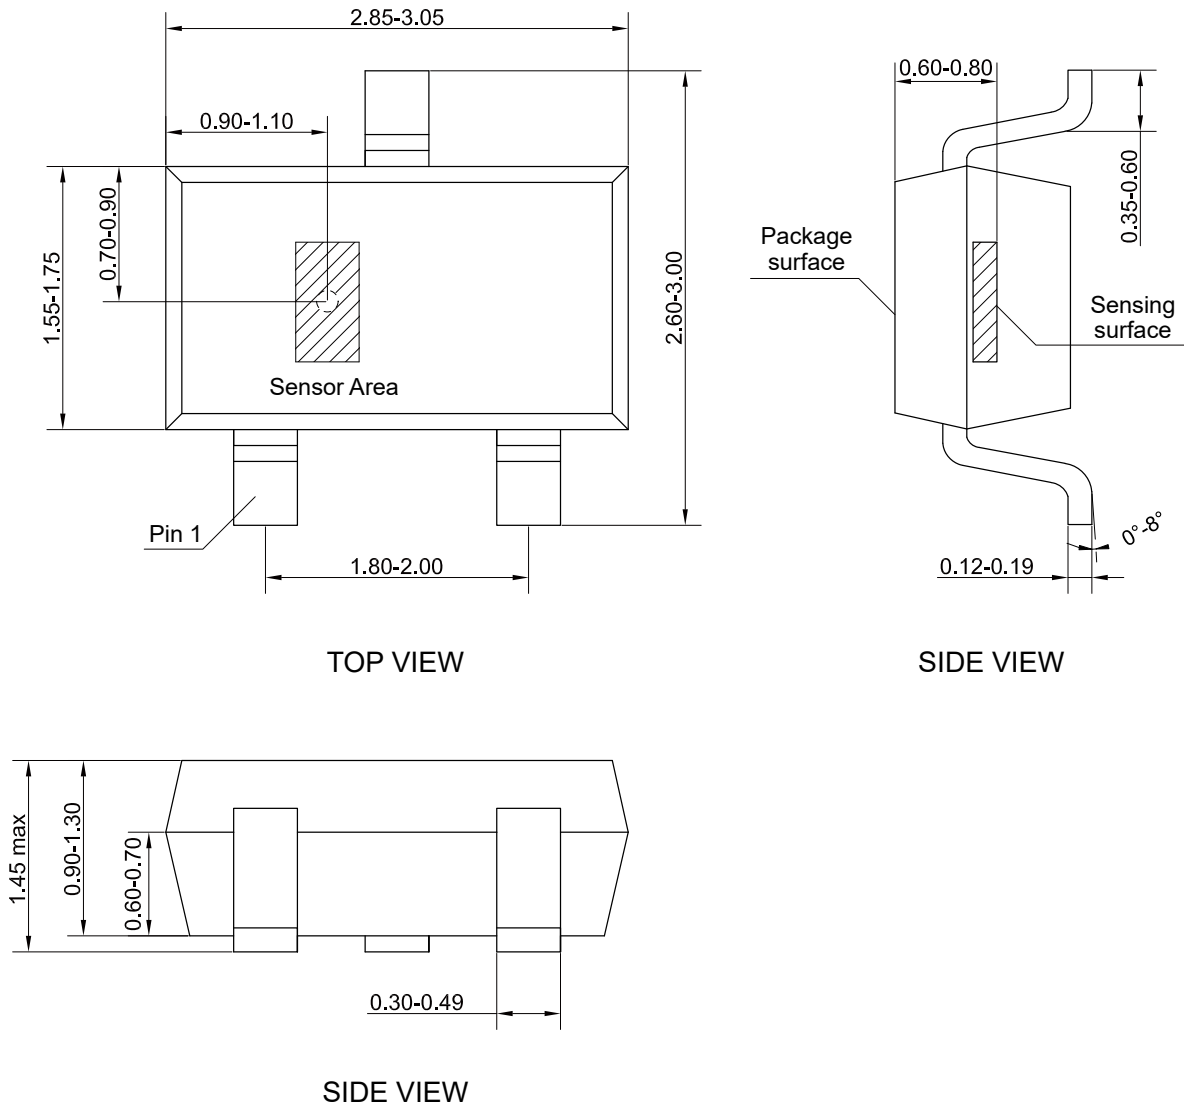


Figure 17. Package outline of SOT23-3 (unit: mm)

TO92S Package

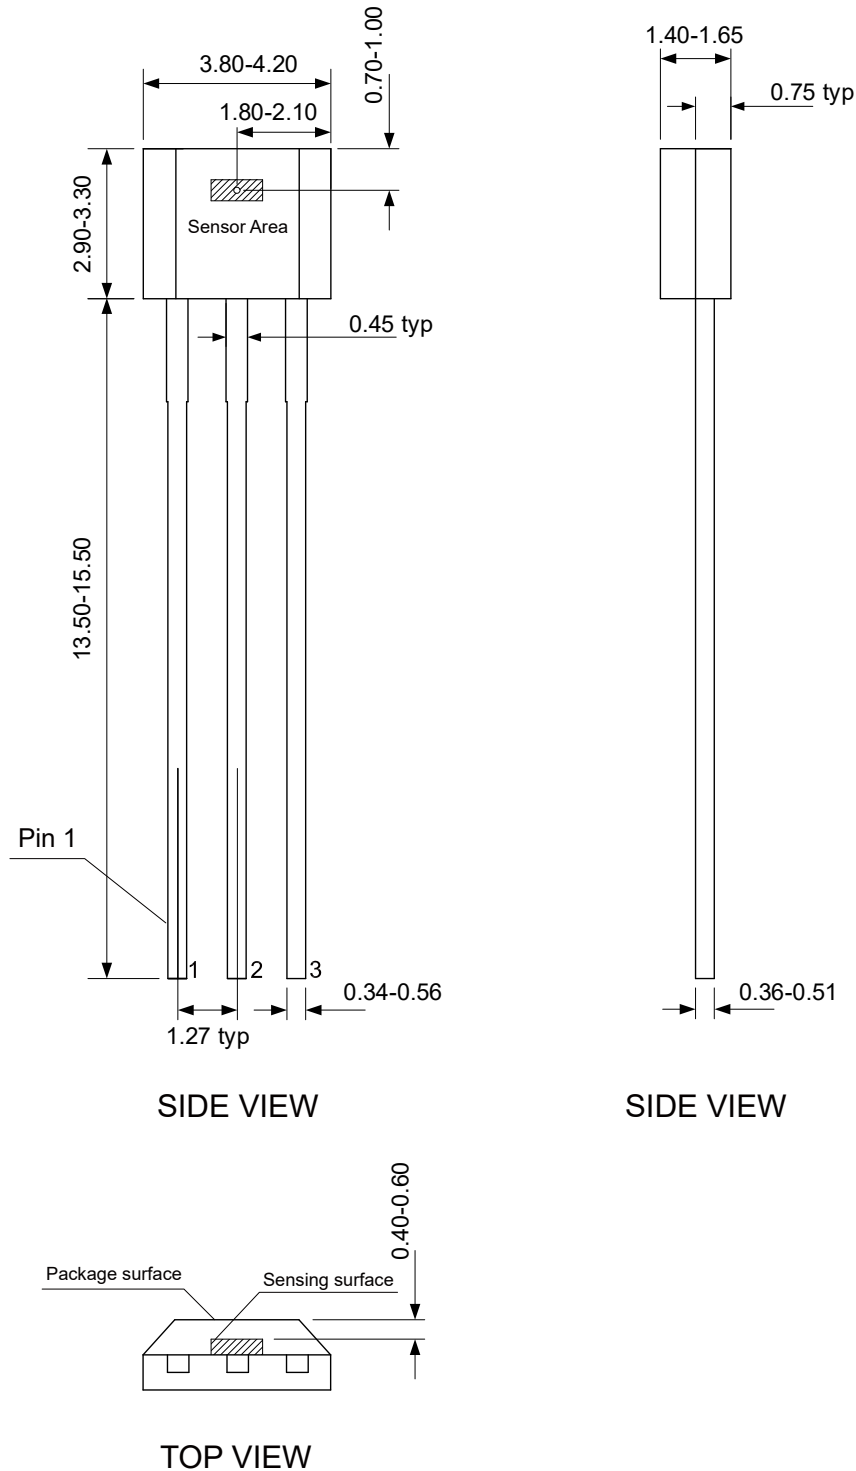


Figure 18. Package outline of TO92S (unit: mm)

LGA3L Package

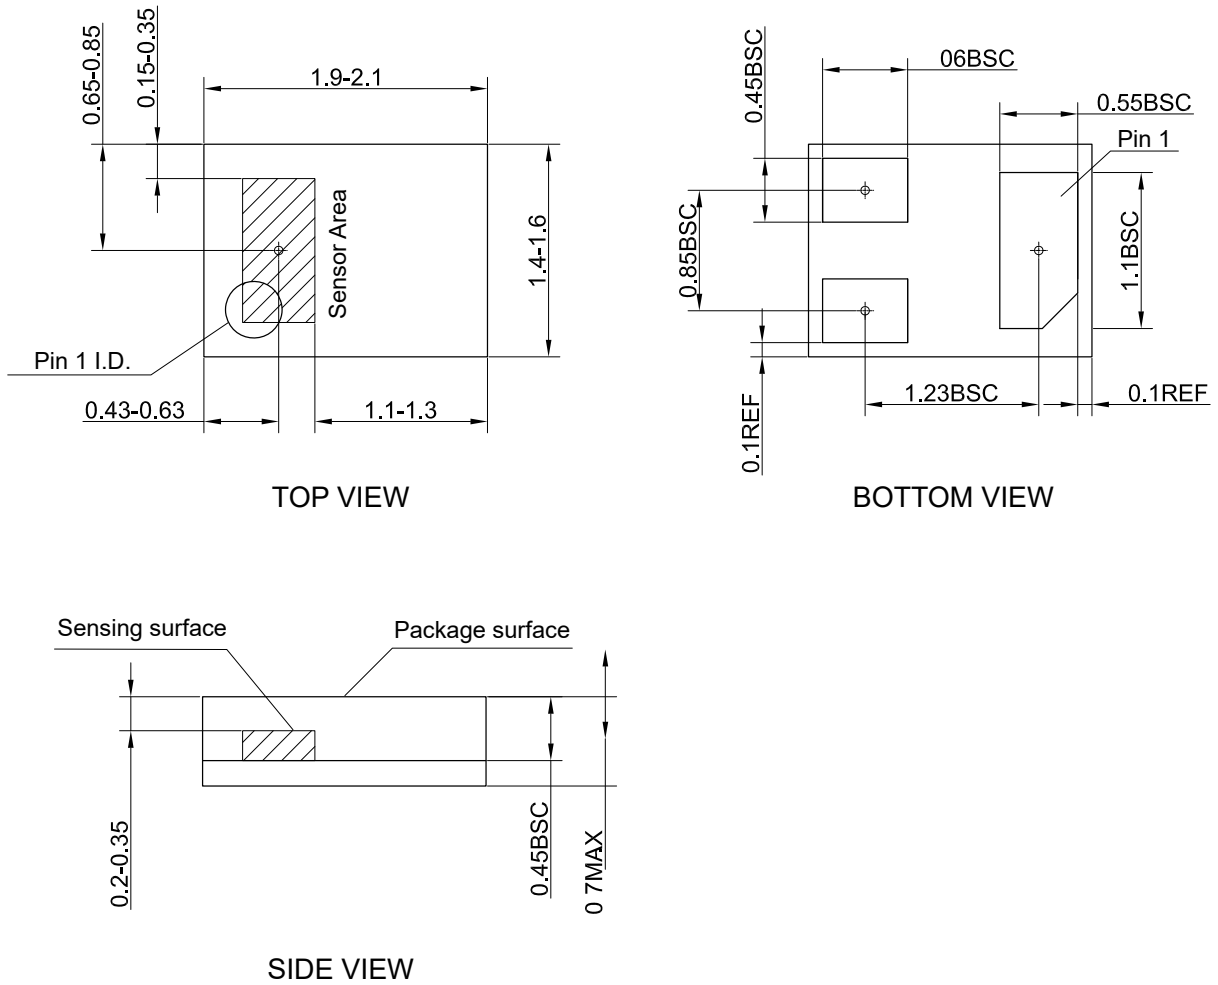


Figure 19. Package outline of LGA3L (unit: mm)

Copyright © 2022 by MultiDimension Technology Co., Ltd.

Information furnished herein by MultiDimension Technology Co., Ltd. (hereinafter MDT) is believed to be accurate and reliable. However, MDT disclaims any and all warranties and liabilities of any kind, with respect to any examples, hints or any performance or use of technical data as described herein and/or any information regarding the application of the product, including without limitation warranties of non-infringement of intellectual property rights of any third party. This document neither conveys nor implies any license under patent or other industrial or intellectual property rights. Customer or any third-party must further determine the suitability of the MDT products for its applications to avoid the applications default of customer or third-party. MDT accept no liability in this respect.

MDT does not assume any liabilities of any indirect, incidental, punitive, special or consequential damages (including without limitation of lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, MDT's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the terms and conditions of commercial sale of MDT.

Absolute maximum ratings are the extreme limits the device will withstand without damage to the MDT product. However, the electrical and mechanical characteristics are not guaranteed as the maximum limits (above recommended operating conditions) are approached. MDT disclaims any and all warranties and liabilities of the MDT product will operate at absolute maximum ratings.

Specifications may change without notice.

Please download latest document from our official website [www.dowaytech.com/en](http://www.dowaytech.com/en).

## Recycling

The product(s) in this document need to be handed over to a qualified solid waste management services company for recycling in accordance with relevant regulations on waste classification after the end of the product(s) life.



No.2 Guangdong Road, Zhangjiagang Free Trade Zone, Jiangsu, China

Web: [www.dowaytech.com/en](http://www.dowaytech.com/en) E-mail: [info@dowaytech.com](mailto:info@dowaytech.com)

