



MICROCHIP

**EQCO-SDI-30-7502 HD-SDI
Repeater
User's Guide**

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights.

Trademarks

The Microchip name and logo, the Microchip logo, dsPIC, FlashFlex, flexPWR, JukeBlox, KEELOQ, KEELOQ logo, Kleer, LANCheck, MediaLB, MOST, MOST logo, MPLAB, OptoLyzer, PIC, PICSTART, PIC³² logo, RightTouch, SpyNIC, SST, SST Logo, SuperFlash and UNI/O are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

The Embedded Control Solutions Company and mTouch are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Analog-for-the-Digital Age, BodyCom, chipKIT, chipKIT logo, CodeGuard, dsPICDEM, dsPICDEM.net, ECAN, In-Circuit Serial Programming, ICSP, Inter-Chip Connectivity, KleerNet, KleerNet logo, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, RightTouch logo, REAL ICE, SQI, Serial Quad I/O, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

Silicon Storage Technology is a registered trademark of Microchip Technology Inc. in other countries.

GestIC is a registered trademarks of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2014, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

ISBN: 978-1-63276-832-2

QUALITY MANAGEMENT SYSTEM
CERTIFIED BY DNV
== ISO/TS 16949 ==

Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC[®] MCUs and dsPIC[®] DSCs, KEELOQ[®] code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.

Object of Declaration: EQCO-SDI-30-7502 HD-SDI Repeater

EU Declaration of Conformity

Manufacturer: Microchip Technology Inc.
2355 W. Chandler Blvd.
Chandler, Arizona, 85224-6199
USA

This declaration of conformity is issued by the manufacturer.

The development/evaluation tool is designed to be used for research and development in a laboratory environment. This development/evaluation tool is not a Finished Appliance, nor is it intended for incorporation into Finished Appliances that are made commercially available as single functional units to end users under EU EMC Directive 2004/108/EC and as supported by the European Commission's Guide for the EMC Directive 2004/108/EC (8th February 2010).

This development/evaluation tool complies with EU RoHS2 Directive 2011/65/EU.

This development/evaluation tool, when incorporating wireless and radio-telecom functionality, is in compliance with the essential requirement and other relevant provisions of the R&TTE Directive 1999/5/EC and the FCC rules as stated in the declaration of conformity provided in the module datasheet and the module product page available at www.microchip.com.

For information regarding the exclusive, limited warranties applicable to Microchip products, please see Microchip's standard terms and conditions of sale, which are printed on our sales documentation and available at www.microchip.com.

Signed for and on behalf of Microchip Technology Inc. at Chandler, Arizona, USA


Derek Carlson
VP Development Tools

12-Sep-14
Date



EQCO-SDI-30-7502 HD-SDI REPEATER USER'S GUIDE

Table of Contents

Preface	5
Chapter 1. Product Overview	
1.1 Introduction	9
1.2 Requirements	9
1.3 Setup	10
1.4 Connection Diagram	11
1.5 Cable Connection	12
Appendix A. Specifications	
Worldwide Sales and Service	16

Preface

NOTICE TO CUSTOMERS

All documentation becomes dated, and this manual is no exception. Microchip tools and documentation are constantly evolving to meet customer needs, so some actual dialogs and/or tool descriptions may differ from those in this document. Please refer to our web site (www.microchip.com) to obtain the latest documentation available.

Documents are identified with a “DS” number. This number is located on the bottom of each page, in front of the page number. The numbering convention for the DS number is “DSXXXXXXXXA”, where “XXXXXXXX” is the document number and “A” is the revision level of the document.

For the most up-to-date information on development tools, see the MPLAB® IDE online help. Select the Help menu, and then Topics to open a list of available online help files.

INTRODUCTION

This chapter contains general information that will be useful to know before using the EQCO-SDI-30-7502 HD-SDI Repeater. Items discussed in this chapter include:

- [Document Layout](#)
- [Recommended Reading](#)
- [Recommended Reading](#)
- [The Microchip Web Site](#)
- [Development Systems Customer Change Notification Service](#)
- [Customer Support](#)
- [Document Revision History](#)

DOCUMENT LAYOUT

This document describes how to use the EQCO-SDI-30-7502 HD-SDI Repeater. This document includes the following chapters:

- **Chapter 1. “Product Overview”** provides a brief overview of the EQCO-SDI-30-7502, highlighting its features and uses.
- **Appendix A. “Specifications”** provides technical and performance specifications for the EQCO-SDI-30-7502.

EQCO-SDI-30-7502 HD-SDI Repeater User's Guide

RECOMMENDED READING

The following document is recommended as a supplemental reference resource.

- **AN1837 – “EqcoLogic HD-SDI Repeater Reference Design” (DS00001837)**

Consult this document for detailed information on the HD-SDI Repeater. Reference information found in this document includes:

- Basic principles of operation
- Printed circuit board design
- Instructions for use and troubleshooting

This document is available on request.

THE MICROCHIP WEB SITE

Microchip provides online support via our web site at: <http://www.microchip.com>. This web site makes files and information easily available to customers. Accessible by most Internet browsers, the web site contains the following information:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQs), technical support requests, online discussion groups, Microchip consultant program member listings
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listings of seminars and events; and listings of Microchip sales offices, distributors and factory representatives

DEVELOPMENT SYSTEMS CUSTOMER CHANGE NOTIFICATION SERVICE

Microchip's customer notification service helps keep customers current on Microchip products. Subscribers will receive e-mail notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, access the Microchip web site at www.microchip.com, click on Customer Change Notification and follow the registration instructions.

The Development Systems product group categories are:

- **Compilers** – The latest information on Microchip C compilers and other language tools
- **Emulators** – The latest information on the Microchip in-circuit emulator, MPLAB[®] REAL ICE™
- **In-Circuit Debuggers** – The latest information on the Microchip in-circuit debugger, MPLAB ICD 3
- **MPLAB X IDE** – The latest information on Microchip MPLAB X IDE, the Windows[®] Integrated Development Environment for development systems tools
- **Programmiers** – The latest information on Microchip programmers including the PICkit™ 3 development programmer

CUSTOMER SUPPORT

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Field Application Engineer (FAE)
- Technical Support

Customers should contact their distributor, representative or field application engineer (FAE) for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in the back of this document.

Technical support is available through the web site at: <http://support.microchip.com>

DOCUMENT REVISION HISTORY

Revision A (October 2014)

- Initial release of this document.

Revision B (December 2014)

The following is the list of modifications:

1. Updated **“Recommended Reading”** with AN1837.
2. Removed Conventions Used in this Guide from the Preface.
3. Minor typographical changes.

EQCO-SDI-30-7502 HD-SDI Repeater User's Guide

NOTES:

Chapter 1. Product Overview

1.1 INTRODUCTION

The repeater contains three critical components to correct and then retransmit the HD-SDI signal:

- Adaptive Equalizer to return the signal to its original amplitude and modulation
- Reclocker to resynchronize the signal and bring it back to its original condition
- Cable Driver to retransmit the signal with its original characteristics restored

Furthermore, the repeater design allows for unique benefits:

- Power can be transmitted from the recorder side to the camera over the coax cable.
- Up to five repeaters may be powered from the coax cable; if one or two repeaters are used, the power may also be adequate to power the camera on the remote end.
- Five or more repeaters can be connected if power is added in the middle of the link.
- A control signal (RS485) can be transmitted from the recorder (DVR) side to the camera over the coax cable.
- Simultaneous video signal transmission, camera control and power over a single cable allows full re-use of legacy coax infrastructure.

1.2 REQUIREMENTS

- 75Ω coaxial cable with 75Ω BNC connectors on each end (maximum length based on cable type – see specifications).
- HD-SDI camera or source (with or without power over coax capability).
- HD-SDI DVR or capture source (with or without power over coax capability).
- 24V DC power supply (not provided).
- 12V DC power supplies can be used if only two repeaters are used and there is no need to power the camera over the coax (not provided).

1.3 SETUP

Each repeater supports a link of up to 200m with a data rate of 1.485 Gbps and 130m at 2.97 Gbps (depending on cable quality). Longer lengths can be supported with lower-speed cameras; e.g., 720m for SDI cameras. Up to five repeater units can be daisy-chained together, all powered over the coax cable by power injected to the first repeater.

Follow these steps:

1. Connect the 24V DC or 12V DC power supply (for the DVR side) and the RS485 in/out cables to the plug connector.
2. Plug the plug connector into the repeater (on the camera side or DVR side).
3. When using multiple repeaters and the RS485 uplink, connect the RS485 Out cable to the camera (or breakout board) at the camera side.
4. When using multiple repeaters and the RS485 uplink, connect the RS485 In cable to the DVR (or breakout board) at the DVR side.
5. Connect the 75Ω coaxial cable to the 75Ω BNC connector on the repeater.
6. If powering a camera or remote source over the coax, draw power from the VCC and GND pins of the plug connector at the camera side.

Note 1: If used, repeaters 2-5 are powered via the first repeater.

2: Camera control is one-way only, from the DVR to the camera.

1.4 CONNECTION DIAGRAM

Extend HD-SDI links up to 1 km with power over cable and camera control link over a single coax cable.

FIGURE 1-1: CAMERA SIDE HD-SDI REPEATER WITH POWER AND CONTROL OUTPUTS


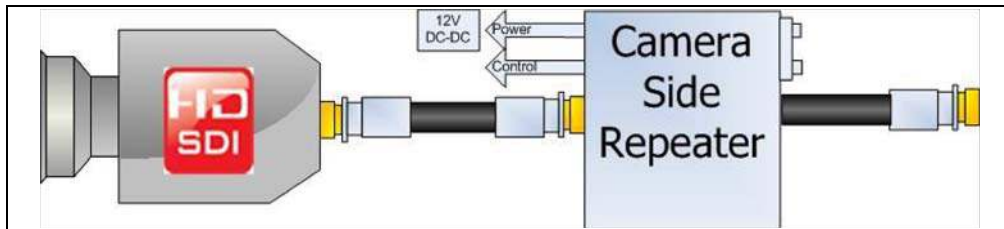


FIGURE 1-2: IN-LINE HD-SDI REPEATER (UP TO FIVE REPEATERS BEFORE ADDITIONAL POWER IS REQUIRED)



FIGURE 1-3: DVR SIDE REPEATER INCLUDING LINK POWER AND CONTROL CHANNEL

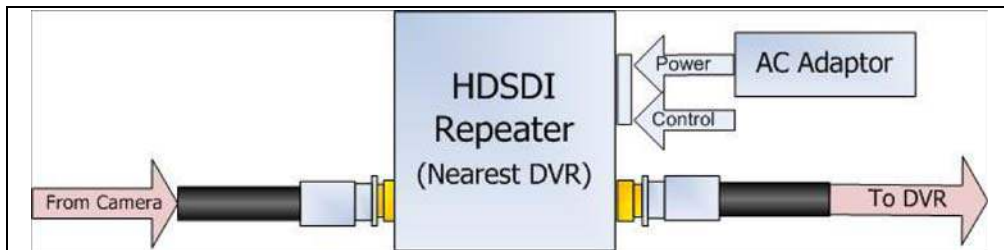

The characteristic impedances of the coaxial cables and connectors must all match. The EQCO-SDI-30-7502 Repeater must have $75\Omega (\pm 3\Omega)$ impedance. [Figure 1-4](#) shows the difference between a 50Ω connector versus a 75Ω connector. A 75Ω coaxial cable with 75Ω connectors must be used.

FIGURE 1-4: DIFFERENCE BETWEEN 50Ω VS. 75Ω CONNECTORS



EQCO-SDI-30-7502 HD-SDI Repeater User's Guide

1.5 CABLE CONNECTION

When using the repeater at the DVR side, the 24V DC or 12V DC power supply can be connected to the plug connector. The cable used for the RS485 input signal should be connected to the RS485 pins of the plug connector. Make sure that all the cables are connected in the right order, as shown in Figure 1-5. Insert the plug connector into the repeater box at the DVR side.

When using the repeater at the camera side, the camera can be powered (when no more than two repeaters are used) by connecting the power to the VCC and GND of the plug connector. Connect the RS485 output pins to the right pins of the Mini-Combicon plug connector as illustrated in Figure 1-6. Make sure that all the cables are connected in the right order. Insert the plug connector into the repeater box at the camera side.

Note: The camera can be powered if only two repeaters are used in-line. It is necessary to power the first repeater with 24V. Using more than two repeaters will not allow sufficient power supply for powering the camera. In this case, external power must be supplied to the camera.

FIGURE 1-5: DVR SIDE


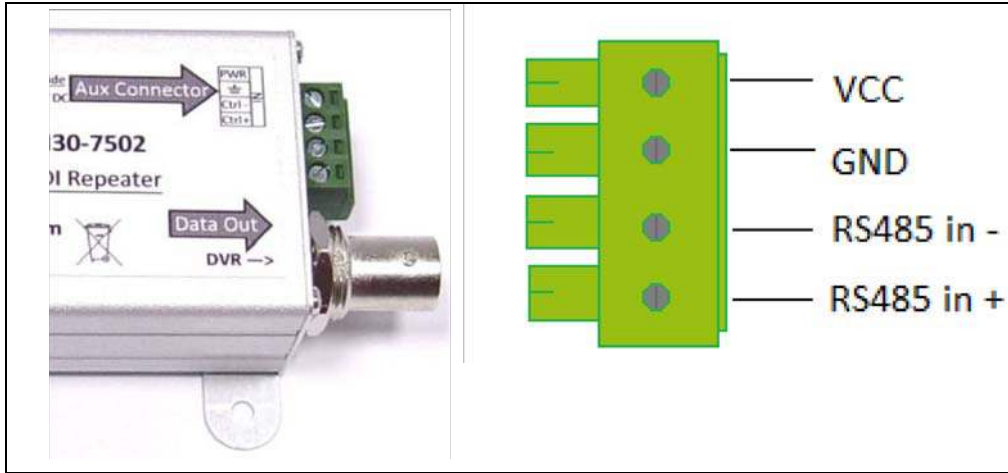


FIGURE 1-6: CAMERA SIDE

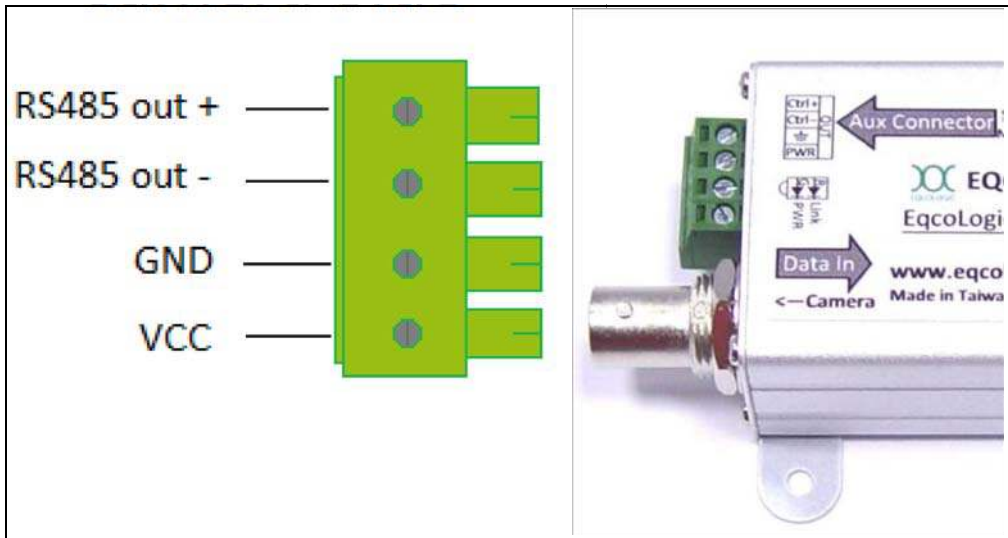

Appendix A. Specifications

This appendix includes the following figures:

- **Table A-1: “Technical Specifications”**
- **Table A-2: “Performance Specifications”**

TABLE A-1: TECHNICAL SPECIFICATIONS

HD-SDI Interface	
Connectors	BNC True 75Ω
Cable Impedance	75Ω ± 3Ω
Data Throughput	270 Mbps, 1.485 Gbps, 2.97 Gbps
Aux Interface	
Connector (Head End)	Plug connector
Signaling	RS485 in, RS485 out, Gnd, +24V
Power Supply Input (Head End Input)	
Aux Power In	24V @ 720 mW, plus any concatenated repeaters
DC Feed via Coax	Min 9-24V DC, rated current 0.5-2A
Power Supply Output (Camera Side Output)	
Aux Power Out	VIN @ Head End-1V-Coax DC Drop (varies with cable type/length)
DC Feed via Coax	VIN @ Head End-1V-Coax DC per hop (varies with cable type/length)
DC Supply Current	Maximum 400 mA-30 mA per repeater
Environmental	
Operating Temperature	0°C to 50°C
Relative Humidity	Up to 85% non-condensing
Storage Temperature	-20°C to 70°C

TABLE A-2: PERFORMANCE SPECIFICATIONS

Performance by Coax Type ⁽¹⁾	Max Coax Length for Error Free Operation @ 1.485 Gbps	Max Coax Length for Error Free Operation @ 2.97 Gbps	Cable/Power Budget ⁽¹⁾	
			Max # Repeaters (total length)	DC Power after 2 Repeaters
RG6 Sample 1 (16 dB/100m) (Belden 1694A)	220m/720 ft	120m/390 ft	5 (1 km)	6w
RG6 Sample 2 (16 dB/100m) (Carol Brand)	220m/720 ft	120m/390 ft	3 (600m)	1.8w
5C-HFBT Sample (16 dB/100m) (Amphenol)	220m/720 ft	120m/390 ft	5 (1 km)	6w
RG59 Sample (23 dB/100m)	153m/502 ft	83m/272 ft	5 (700m)	6.5w
3C-2V Sample 1 (41 dB/100m) (Hangzhou Linan Tongda Cable Co., Ltd.)	85m/280 ft	47m/154 ft	5 (390m)	6.5w
RG11 Sample (10 dB/100m) (CommCCope F1160BVV)	350m/1150 ft	192m/630 ft	4 (1.3 km)	4w

1: At 1.485 Gbps

NOTES:



MICROCHIP

Worldwide Sales and Service

AMERICAS

Corporate Office
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
<http://www.microchip.com/support>
Web Address:
www.microchip.com

Atlanta
Duluth, GA
Tel: 678-957-9614
Fax: 678-957-1455

Austin, TX
Tel: 512-257-3370

Boston
Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

Chicago
Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

Cleveland
Independence, OH
Tel: 216-447-0464
Fax: 216-447-0643

Dallas
Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

Detroit
Novi, MI
Tel: 248-848-4000

Houston, TX
Tel: 281-894-5983

Indianapolis
Noblesville, IN
Tel: 317-773-8323
Fax: 317-773-5453

Los Angeles
Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608

New York, NY
Tel: 631-435-6000

San Jose, CA
Tel: 408-735-9110

Canada - Toronto
Tel: 905-673-0699
Fax: 905-673-6509

ASIA/PACIFIC

Asia Pacific Office
Suites 3707-14, 37th Floor
Tower 6, The Gateway
Harbour City, Kowloon
Hong Kong
Tel: 852-2943-5100
Fax: 852-2401-3431

Australia - Sydney
Tel: 61-2-9868-6733
Fax: 61-2-9868-6755

China - Beijing
Tel: 86-10-8569-7000
Fax: 86-10-8528-2104

China - Chengdu
Tel: 86-28-8665-5511
Fax: 86-28-8665-7889

China - Chongqing
Tel: 86-23-8980-9588
Fax: 86-23-8980-9500

China - Hangzhou
Tel: 86-571-8792-8115
Fax: 86-571-8792-8116

China - Hong Kong SAR
Tel: 852-2943-5100
Fax: 852-2401-3431

China - Nanjing
Tel: 86-25-8473-2460
Fax: 86-25-8473-2470

China - Qingdao
Tel: 86-532-8502-7355
Fax: 86-532-8502-7205

China - Shanghai
Tel: 86-21-5407-5533
Fax: 86-21-5407-5066

China - Shenyang
Tel: 86-24-2334-2829
Fax: 86-24-2334-2393

China - Shenzhen
Tel: 86-755-8864-2200
Fax: 86-755-8203-1760

China - Wuhan
Tel: 86-27-5980-5300
Fax: 86-27-5980-5118

China - Xian
Tel: 86-29-8833-7252
Fax: 86-29-8833-7256

China - Xiamen
Tel: 86-592-2388138
Fax: 86-592-2388130

China - Zhuhai
Tel: 86-756-3210040
Fax: 86-756-3210049

ASIA/PACIFIC

India - Bangalore
Tel: 91-80-3090-4444
Fax: 91-80-3090-4123

India - New Delhi
Tel: 91-11-4160-8631
Fax: 91-11-4160-8632

India - Pune
Tel: 91-20-3019-1500

Japan - Osaka
Tel: 81-6-6152-7160
Fax: 81-6-6152-9310

Japan - Tokyo
Tel: 81-3-6880-3770
Fax: 81-3-6880-3771

Korea - Daegu
Tel: 82-53-744-4301
Fax: 82-53-744-4302

Korea - Seoul
Tel: 82-2-554-7200
Fax: 82-2-558-5932 or
82-2-558-5934

Malaysia - Kuala Lumpur
Tel: 60-3-6201-9857
Fax: 60-3-6201-9859

Malaysia - Penang
Tel: 60-4-227-8870
Fax: 60-4-227-4068

Philippines - Manila
Tel: 63-2-634-9065
Fax: 63-2-634-9069

Singapore
Tel: 65-6334-8870
Fax: 65-6334-8850

Taiwan - Hsin Chu
Tel: 886-3-5778-366
Fax: 886-3-5770-955

Taiwan - Kaohsiung
Tel: 886-7-213-7830

Taiwan - Taipei
Tel: 886-2-2508-8600
Fax: 886-2-2508-0102

Thailand - Bangkok
Tel: 66-2-694-1351
Fax: 66-2-694-1350

EUROPE

Austria - Wels
Tel: 43-7242-2244-39
Fax: 43-7242-2244-393

Denmark - Copenhagen
Tel: 45-4450-2828
Fax: 45-4485-2829

France - Paris
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

Germany - Dusseldorf
Tel: 49-2129-3766400

Germany - Munich
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

Germany - Pforzheim
Tel: 49-7231-424750

Italy - Milan
Tel: 39-0331-742611
Fax: 39-0331-466781

Italy - Venice
Tel: 39-049-7625286

Netherlands - Drunen
Tel: 31-416-690399
Fax: 31-416-690340

Poland - Warsaw
Tel: 48-22-3325737

Spain - Madrid
Tel: 34-91-708-08-90
Fax: 34-91-708-08-91

Sweden - Stockholm
Tel: 46-8-5090-4654

UK - Wokingham
Tel: 44-118-921-5800
Fax: 44-118-921-5820

03/25/14