

# 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules

9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current

9Vdc –24Vdc input; -3.3Vdc to -18Vdc output<sup>1</sup>; 10A to 2A Scaled output current




**RoHS Compliant**

## Applications

- Industrial equipment
- Distributed power architectures
- Intermediate bus voltage applications
- Telecommunications equipment

## Features

- Compliant to RoHS Directive 2011/65/EU and amended Directive (EU) 2015/863
- Compliant to REACH Directive (EC) No 1907/2006
- Compatible in a Pb-free or SnPb reflow environment (Z versions)
- Compliant to IPC-9592 (September 2008), Category 2, Class II
- Tunable control loop for fast transient response
- Remote sense
- Optional positive or negative logic remote On/Off
- Output over current protection (non-latching)
- Over temperature protection
- Monotonic startup
- Sync Capability
- Small size and low profile:
  - 33 mm x 13.46 mm x 10 mm (max.)
  - (1.3 in x 0.53 in x 0.39 in (max.))
- Output voltage programmable from 3 Vdc to 18Vdc via external resistor
- Wide operating temperature range (-40°C to 85°C)
- ANSI/UL\* 62368-1 and CAN/CSA† C22.2 No. 62368-1 Recognized, DIN VDE‡ 0868-1/A11:2017 (EN62368-1:2014/A11:2017)
- ISO\*\* 9001 and ISO 14001 certified manufacturing facilities

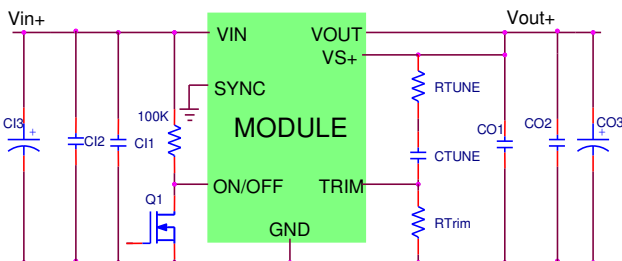

## Description

The 9-36V ProLynx™ series of power modules are non-isolated dc-dc converters that can deliver up to 12A of output current. These modules operate over an extra wide range of input voltage ( $V_{IN} = 9Vdc - 36Vdc$ ) and provide a precisely regulated output voltage from 3Vdc to 18Vdc, programmable via an external resistor. Two new features added with this family of products are the ability to externally tune the voltage control loop and a variable current limit inversely dependent on output voltage. Other features include remote On/Off, adjustable output voltage, over current, over temperature protection and sync capability. The Ruggedized version (-D) is capable of operation up to 105°C and withstand high levels of shock and vibration. The Tunable Loop™, allows the user to optimize the dynamic response of the converter to match the load with reduced amount of output capacitance leading to savings on cost and PWB area and AutoLimit enables the module to deliver the max possible output power across the entire voltage range. The 9-36V ProLynx can also be used for negative output voltage loads through the use of a specific application schematic

\* UL is a registered trademark of Underwriters Laboratories, Inc.  
 † CSA is a registered trademark of Canadian Standards Association.  
 ‡ VDE is a trademark of Verband Deutscher Elektrotechniker e.V.  
 \*\* ISO is a registered trademark of the International Organization of Standards  
<sup>1</sup> Output range linked to input voltage range see page 24



## 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules

9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current

9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 10A to 2A Scaled output current

### Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only, functional operation of the device is not implied at these or any other conditions in excess of those given in the operations sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect the device reliability.

| Parameter   | Device     | Symbol    | Min  | Max | Unit |
|---|------------|-----------|------|-----|------|
| Input Voltage<br>Continuous   | All        | $V_{IN}$  | -0.3 | 37  | V    |
| Operating Ambient Temperature<br>(see Thermal Considerations section) | All        | $T_A$     | -40  | 85  | °C   |
|   | -D version | $T_A$     | -40  | 105 | °C   |
| Storage Temperature   | All        | $T_{stg}$ | -55  | 125 | °C   |

### Electrical Specifications

Unless otherwise indicated, specifications apply over all operating input voltage, resistive load, and temperature conditions.

| Parameter  | Device              | Symbol            | Min | Typ | Max | Unit             |
|--|---------------------|-------------------|-----|-----|-----|------------------|
| Operating Input Voltage  | All                 | $V_{IN}$          | 9   | —   | 36  | Vdc              |
| Maximum Input Current<br>( $V_{IN}=9V$ to 36V, $I_O=I_{O,max}$ )   | All                 | $I_{IN,max}$      |     |     | 7   | Adc              |
| Input No Load Current<br>( $V_{IN} = 28V$ , $I_O = 0$ , module enabled)  | $V_{O,set} = 3Vdc$  | $I_{IN,No\ load}$ |     | 30  |     | mA               |
|  | $V_{O,set} = 18Vdc$ | $I_{IN,No\ load}$ |     | 50  |     | mA               |
| Input Stand-by Current<br>( $V_{IN} = 28Vdc$ , module disabled)  | All                 | $I_{IN,stand-by}$ |     | 3   |     | mA               |
| Inrush Transient   | All                 | $I^2t$            |     |     | 0.5 | A <sup>2</sup> s |
| Input Reflected Ripple Current, peak-to-peak<br>(5Hz to 20MHz, 1μH source impedance; $V_{IN}=0$ to 36V, $I_O=I_{O,max}$ ; See Test Configurations) | All                 |                   |     | 125 |     | mAp-p            |
| Input Ripple Rejection (120Hz)   | All                 |                   |     | -45 |     | dB               |

#### CAUTION: This power module is not internally fused. An input line fuse must always be used.

This power module can be used in a wide variety of applications, ranging from simple standalone operation to an integrated part of sophisticated power architecture. To preserve maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse. The safety agencies require a fast-acting fuse with a maximum rating of 8 A fast acting (see Safety Considerations section). Based on the information provided in this data sheet on inrush energy and maximum dc input current, the same type of fuse with a lower rating can be used. Refer to the fuse manufacturer's data sheet for further information.

## 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules

9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current

9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 10A to 2A Scaled output current

### Electrical Specifications (continued)

| Parameter  | Device | Symbol       | Min  | Typ         | Max   | Unit                |
|--|--------|--------------|------|-------------|-------|---------------------|
| Output Voltage Set-point   | All    | $V_{o, set}$ | -1.5 |             | +1.5  | % $V_{o, set}$      |
| Output Voltage<br>(Over all operating input voltage, resistive load, and temperature conditions until end of life)   | All    | $V_{o, set}$ | -2.5 | —           | +2.5  | % $V_{o, set}$      |
| Adjustment Range (elected by an external resistor)<br>(Some output voltages may not be possible depending on the input voltage – see Feature Descriptions Section)   | All    | $V_o$        | 3    |             | 18    | Vdc                 |
| Output Regulation  |        |              |      |             |       |                     |
| Line ( $V_{IN}=V_{IN, min}$ to $V_{IN, max}$ )   | All    |              |      | —           | 0.4   | % $V_{o, set}$      |
| Load ( $I_o=I_{o, min}$ to $I_{o, max}$ )  | All    |              |      | —           | 0.4   | % $V_{o, set}$      |
| Temperature ( $T_{ref}=T_{A, min}$ to $T_{A, max}$ )   | All    |              |      | 1           |       | % $V_{o, set}$      |
| Remote Sense Range   | All    |              |      |             | 0.5   | Vdc                 |
| Input Noise, nominal output, ( $V_{IN}=V_{IN, nom}$ and $I_o=I_o$ , min to $I_o$ , max $C_{in} = 1x47nF(0306)$ or equivalent, $5x10uF$ , 50V(1210) ceramic capacitors and 470uF,50V (electrolytic), 25°C Ambient, 500MHz BW  | All    |              |      | 3% $V_{in}$ |       |                     |
| Output Ripple and Noise on nominal output ( $V_{IN}=V_{IN, nom}$ and $I_o=I_o$ , min to $I_o$ , max $C_o = 1x47nF(0306)$ or equivalent, $2x47uF$ (1210) or equivalent ceramic capacitors on output and $1x47nF(0402)$ or equivalent, $5x10uF(1210)$ ceramic capacitors or equivalent and 470uF,50V electrolytic) on input, 25°C Ambient, 500MHz BW |        |              |      | 2.5% $V_o$  |       | mVpk-pk             |
| Output Ripple and Noise on nominal output<br>( $V_{IN}=V_{IN, nom}$ and $I_o=I_o$ , min to $I_o$ , max $C_o = 0.1\mu F // 10\mu F$ ceramic capacitors)   |        |              |      |             |       |                     |
| Vout=3.3V, Vin=28V   |        |              |      |             |       |                     |
| Peak-to-Peak (5Hz to 20MHz bandwidth)  | All    |              |      | 75          |       | mV <sub>pk-pk</sub> |
| RMS (5Hz to 20MHz bandwidth)   | All    |              |      | 20          |       | mV <sub>rms</sub>   |
| Vout=18V, Vin=28V  |        |              |      |             |       |                     |
| Peak-to-Peak (5Hz to 20MHz bandwidth)  | All    |              |      | 150         |       | mV <sub>pk-pk</sub> |
| RMS (5Hz to 20MHz bandwidth)   | All    |              |      | 40          |       | mV <sub>rms</sub>   |
| External Capacitance <sup>1</sup>  |        |              |      |             |       |                     |
| Without the Tunable Loop™  |        |              |      |             |       |                     |
| ESR ≥ 1 mΩ   | All    | $C_{o, max}$ | 0    | —           | 100   | μF                  |
| ESR ≥ 10 mΩ  | All    | $C_{o, max}$ | 0    | —           | 1000  | μF                  |
| With the Tunable Loop™   |        |              |      |             |       |                     |
| ESR ≥ 0.15 mΩ  | All    | $C_{o, max}$ | 100  | —           | 250   | μF                  |
| ESR ≥ 10 mΩ  | All    | $C_{o, max}$ | 0    | —           | 5000* | μF                  |
| Output Current ( $V_o=3V$ )  | All    | $I_o$        | 0    |             | 12    | Adc                 |
| $V_o=5V$   | All    | $I_o$        | 0    |             | 11.2  | Adc                 |
| $V_o=12V$  | All    | $I_o$        | 0    |             | 8.4   | Adc                 |
| $V_o=18V$  | All    | $I_o$        | 0    |             | 6     | Adc                 |

<sup>1</sup>Depending on Input and Output Voltage, external capacitors require using the new Tunable Loop™ feature to ensure that the module is stable as well as getting the best transient response. See the Tunable Loop™ section for details.

\* Larger values may be possible at specific output voltages. Please consult your GE Technical representative for additional details.

## 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules

9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current

9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 10A to 2A Scaled output current

### Electrical Specifications (continued)

| Parameter  | Device               | Symbol      | Min             | Typ  | Max                 | Unit            |
|--|----------------------|-------------|-----------------|------|---------------------|-----------------|
| Output Current Limit Inception (Hiccup Mode )                        | All                  | $I_{O,lim}$ |                 | 160  |                     | % $I_{O,max}$   |
| Output Short-Circuit Current<br>( $V_O \leq 250mV$ ) ( Hiccup Mode ) | All                  | $I_{O,s/c}$ |                 | 3    |                     | A <sub>dc</sub> |
| Efficiency ( $I_O = I_{O,max}$ , $V_O = V_{O,set}$ )                 |                      |             |                 |      |                     |                 |
| $V_{IN} = 12Vdc$ , $T_A = 25^\circ C$                                | $V_{O,set} = 3.3Vdc$ | $\eta$      |                 | 91.0 |                     | %               |
| $V_{IN} = 12Vdc$ , $T_A = 25^\circ C$                                | $V_{O,set} = 5Vdc$   | $\eta$      |                 | 93   |                     | %               |
| $V_{IN} = 28Vdc$ , $T_A = 25^\circ C$                                | $V_{O,set} = 12Vdc$  | $\eta$      |                 | 94   |                     | %               |
| $V_{IN} = 28Vdc$ , $T_A = 25^\circ C$                                | $V_{O,set} = 18Vdc$  | $\eta$      |                 | 95.5 |                     | %               |
| Switching Frequency  | All                  | $f_{sw}$    | —               | 308  | —                   | kHz             |
| Frequency Synchronization  |                      |             |                 |      |                     |                 |
| Synchronization Frequency Range                                      |                      |             | f <sub>SW</sub> |      | 1.1 f <sub>SW</sub> | kHz             |
| Input high voltage   |                      |             | 2               |      |                     | V               |
| Input low voltage  |                      |             |                 |      | 0.8                 | V               |
| Input Current, SYNC  |                      |             |                 |      | 10                  | nA              |
| Minimum SYNC Pulse Width   |                      |             | 50              |      |                     | ns              |

## 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules

9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current

9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 10A to 2A Scaled output current

### General Specifications

| Parameter   | Min | Typ        | Max | Unit    |
|---|-----|------------|-----|---------|
| Calculated MTBF ( $I_o=0.8I_{o,max}$ , $T_A=40^\circ\text{C}$ ) Telcordia Issue 2, Method 1, Case 3 |     | >7,000,000 |     | Hours   |
| Weight  | —   | 7 (0.247)  | —   | g (oz.) |

### Feature Specifications

Unless otherwise indicated, specifications apply over all operating input voltage, resistive load, and temperature conditions. See Feature Descriptions for additional information.

| Parameter   | Device | Symbol    | Min  | Typ | Max | Unit             |
|---|--------|-----------|------|-----|-----|------------------|
| On/Off Signal Interface<br>( $V_{IN}=V_{IN,min}$ to $V_{IN,max}$ ; open collector or equivalent, Signal referenced to GND)<br>Device is with suffix "4" – Positive Logic (See Ordering Information) |        |           |      |     |     |                  |
| Logic High (Module ON)  |        |           |      |     |     |                  |
| Input High Current  | All    | $I_{IH}$  |      | —   | 500 | $\mu\text{A}$    |
| Input High Voltage  | All    | $V_{IH}$  | 4.6  | —   | 12  | V                |
| Logic Low (Module OFF)  |        |           |      |     |     |                  |
| Input Low Current   | All    | $I_{IL}$  | —    | —   | 0.5 | mA               |
| Input Low Voltage   | All    | $V_{IL}$  | -0.3 | —   | 3.3 | V                |
| Device Code with no suffix – Negative Logic (See Ordering Information)  |        |           |      |     |     |                  |
| Logic High (Module OFF)   |        |           |      |     |     |                  |
| Input High Current  | All    | $I_{IH}$  | —    | —   | 3   | mA               |
| Input High Voltage  | All    | $V_{IH}$  | 1.8  | —   | 36  | Vdc              |
| Logic Low (Module ON)   |        |           |      |     |     |                  |
| Input low Current   | All    | $I_{IL}$  | —    | —   | 220 | $\mu\text{A}$    |
| Input Low Voltage   | All    | $V_{IL}$  | -0.2 | —   | 0.3 | Vdc              |
| Turn-On Delay and Rise Times  |        |           |      |     |     |                  |
| ( $V_{IN}=V_{IN,nom}$ , $I_o=I_{o,max}$ , $V_o$ to within $\pm 1\%$ of steady state)  |        |           |      |     |     |                  |
| Case 1: On/Off input is enabled and then input power is applied (delay from instant at which $V_{IN} = V_{IN,min}$ until $V_o = 10\%$ of $V_{o,set}$ )  | All    | Tdelay    | —    | 12  | —   | msec             |
| Case 2: Input power is applied for at least one second and then the On/Off input is enabled (delay from instant at which Von/Off is enabled until $V_o = 10\%$ of $V_{o,set}$ )                     | All    | Tdelay    | —    | 12  | —   | msec             |
| Output voltage Rise time (time for $V_o$ to rise from 10% of $V_o$ , set to 90% of $V_o$ , set)   | All    | Trise     | —    | 20  |     | msec             |
| Output voltage overshoot ( $T_A = 25^\circ\text{C}$<br>$V_{IN} = V_{IN,min}$ to $V_{IN,max}$ , $I_o = I_{o,min}$ to $I_{o,max}$ )<br>With or without maximum external capacitance                   |        |           |      |     | 1   | % $V_{o,set}$    |
| Over Temperature Protection<br>(See Thermal Considerations section)   | All    | $T_{ref}$ |      | 130 |     | $^\circ\text{C}$ |
| Input Undervoltage Lockout  |        |           |      |     |     |                  |
| Turn-on Threshold   | All    |           |      | 8.3 |     | Vdc              |
| Turn-off Threshold  | All    |           |      | 8.2 |     | Vdc              |
| Hysteresis  | All    |           |      | 0.1 |     | Vdc              |

# 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules

9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current

9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 10A to 2A Scaled output current

## Characteristic Curves

The following figures provide typical characteristics for the 9-36V ProLynx™ 12A at 3.3V<sub>o</sub> and at 25°C. (11.8A rated output)

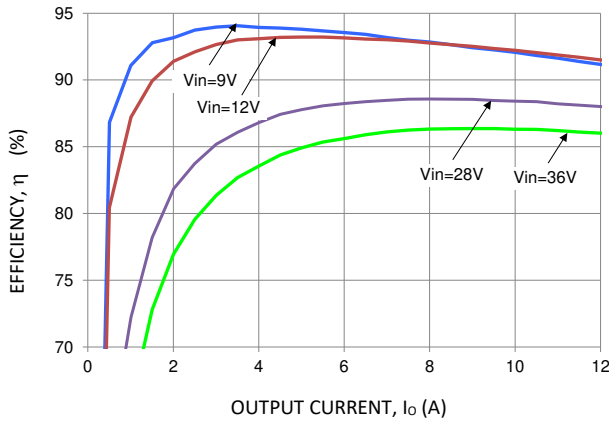


Figure 1. Converter Efficiency versus Output Current.

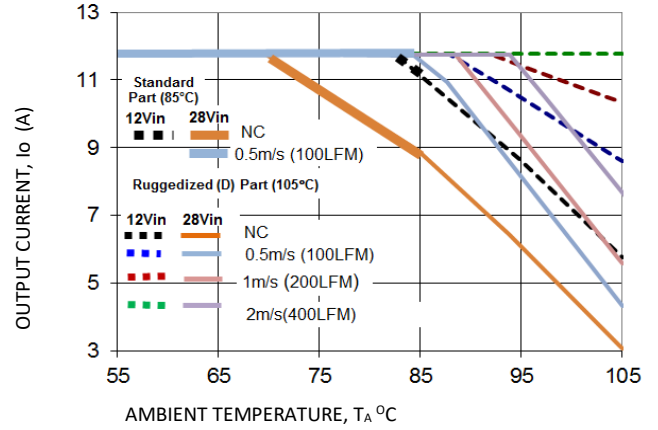


Figure 2. Derating Output Current versus Ambient Temperature and Airflow.

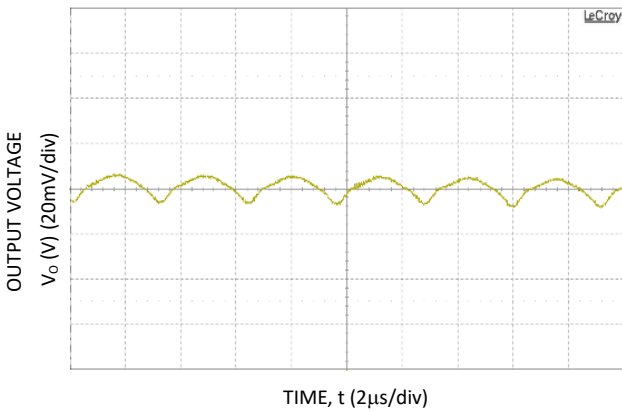


Figure 3. Typical output ripple and noise (VIN = 28V, Io = Io,max).

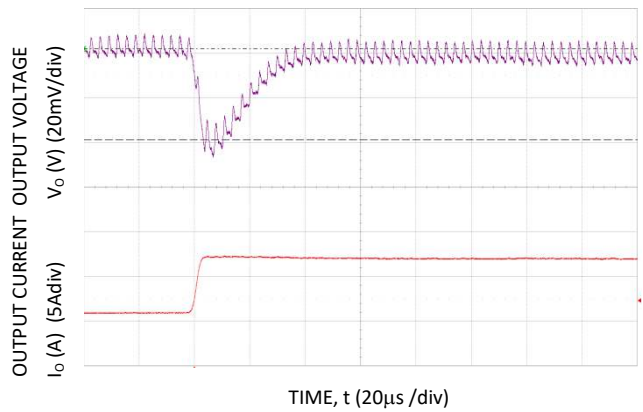


Figure 4. Transient Response to Dynamic Load Change from 50% to 100% at 28Vin, Cext – 2x22µF+2x330µF, CTune=15nF & RTune=200Ω

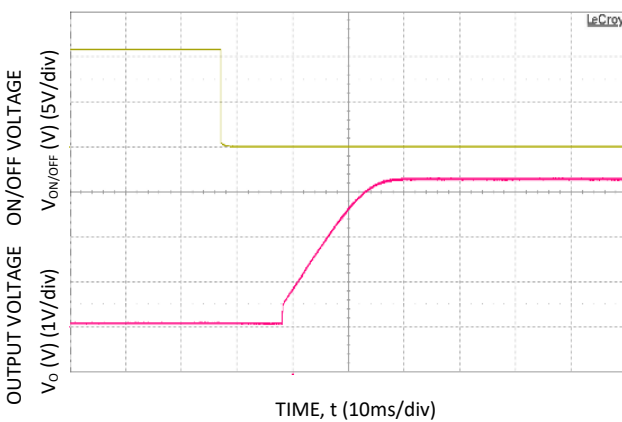


Figure 5. Typical Start-up Using On/Off Voltage (Io = Io,max).

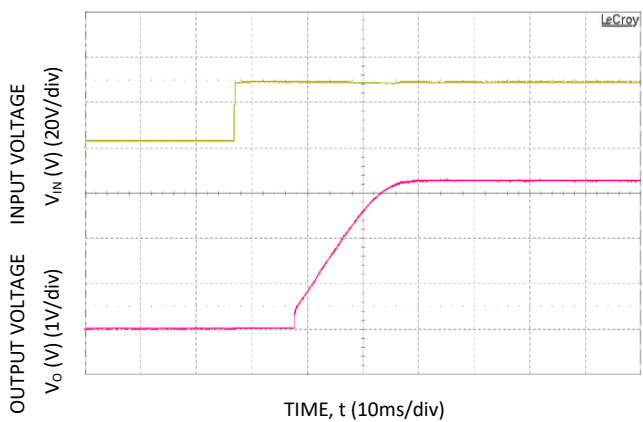


Figure 6. Typical Start-up Using Input Voltage (VIN = 28V, Io = Io,max).

# 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules

9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current

9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 10A to 2A Scaled output current

## Characteristic Curves

The following figures provide typical characteristics for the 9-36V ProLynx™ 12A at 5Vo and at 25°C. (11.2A rated output)

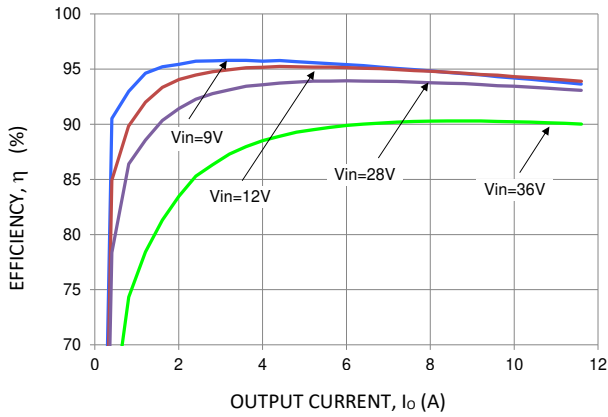


Figure 7. Converter Efficiency versus Output Current.

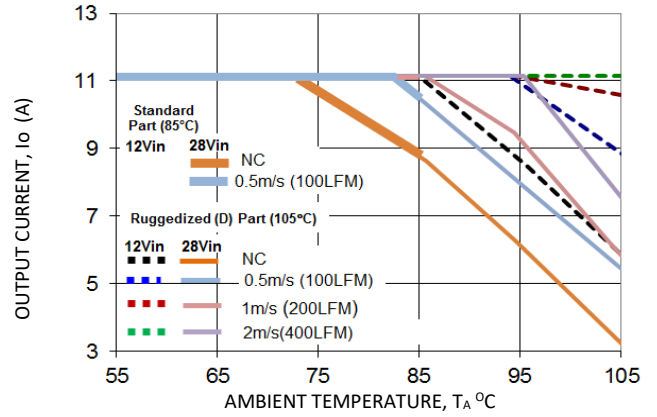


Figure 8. Derating Output Current versus Ambient Temperature and Airflow.

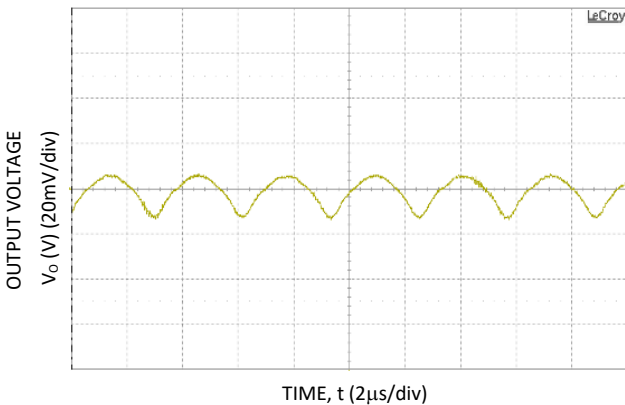


Figure 9. Typical output ripple and noise (VIN = 28V, Io = Io,max).

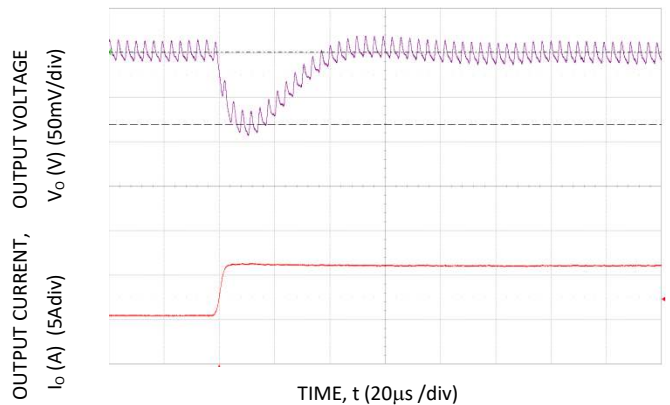


Figure 10. Transient Response to Dynamic Load Change from 50% to 100% at 28Vin, Cext – 1X22µF+1x330µF, CTune=5.6nF & RTune=200

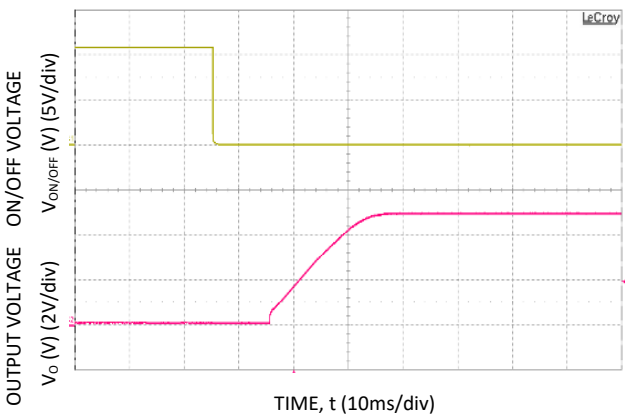


Figure 11. Typical Start-up Using On/Off Voltage (Io = Io,max).

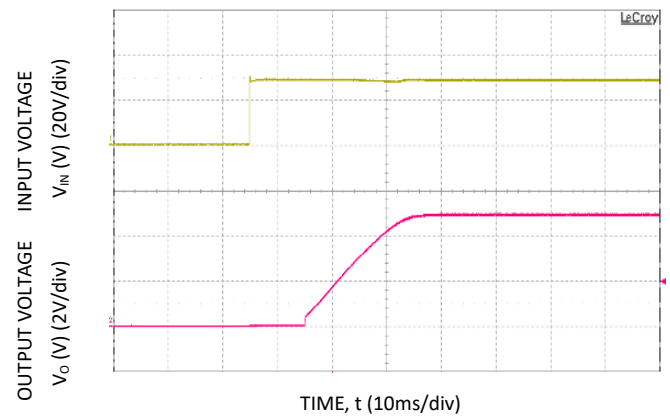


Figure 12. Typical Start-up Using Input Voltage (VIN = 28V, Io = Io,max).

# 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules

9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current

9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 10A to 2A Scaled output current

## Characteristic Curves

The following figures provide typical characteristics for the 9-36V ProLynx™ 12A at 12Vo and at 25°C. (8.4 A rated output)

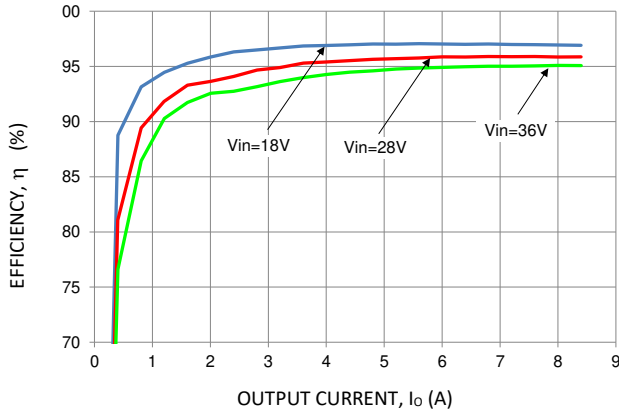


Figure 13. Converter Efficiency versus Output Current.

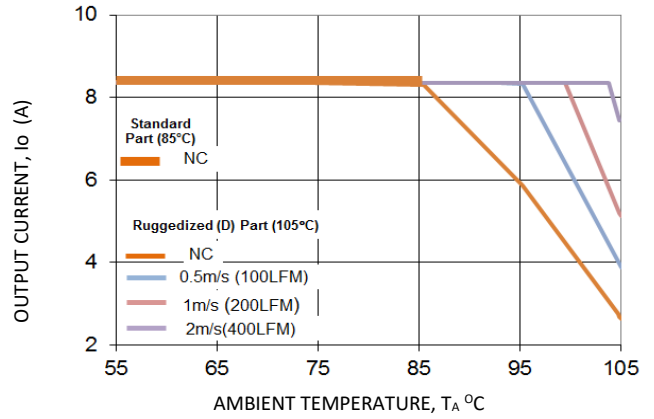


Figure 14. Derating Output Current versus Ambient Temperature and Airflow.

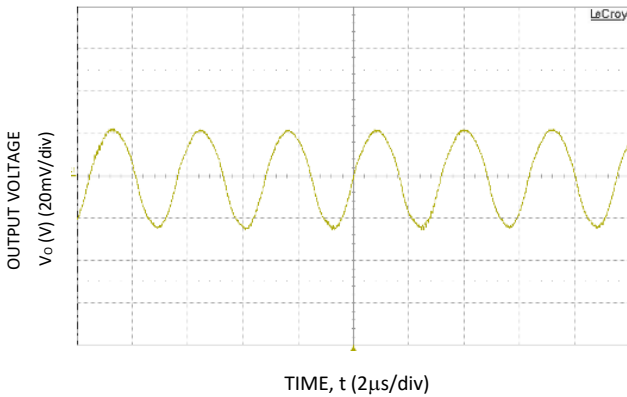


Figure 15. Typical output ripple and noise ( $V_{IN} = 28V$ ,  $I_o = I_{o,max}$ ).

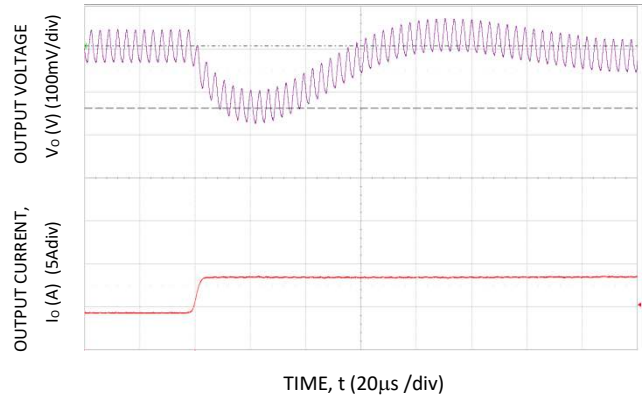


Figure 16. Transient Response to Dynamic Load Change from 50% to 100% at 28Vin, Cext – 1x22µF+1x470µF, CTune=1.5nF & RTune=200

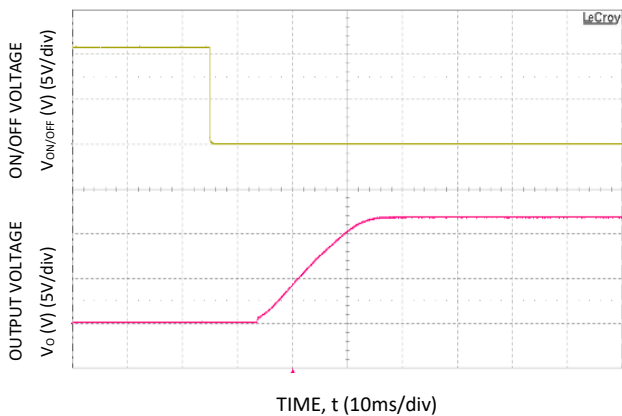


Figure 17. Typical Start-up Using On/Off Voltage ( $I_o = I_{o,max}$ ).

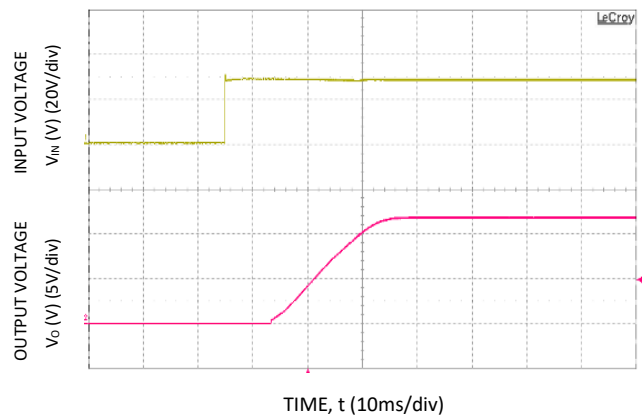


Figure 18. Typical Start-up Using Input Voltage ( $V_{IN} = 28V$ ,  $I_o = I_{o,max}$ ).



# 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules

9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current

9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 10A to 2A Scaled output current

## Characteristic Curves

The following figures provide typical characteristics for the 9-36V ProLynx™ 12A at 18Vo and at 25°C. (6A rated output)

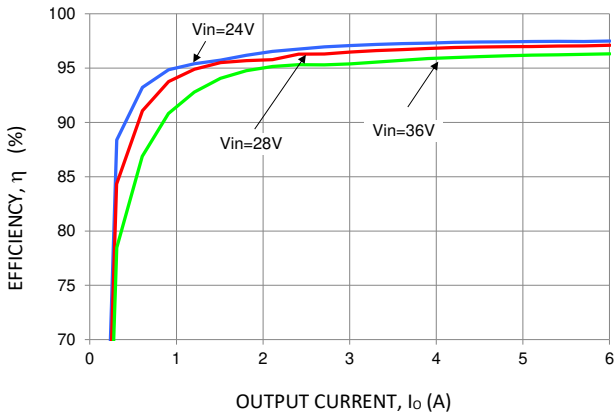


Figure 19. Converter Efficiency versus Output Current.

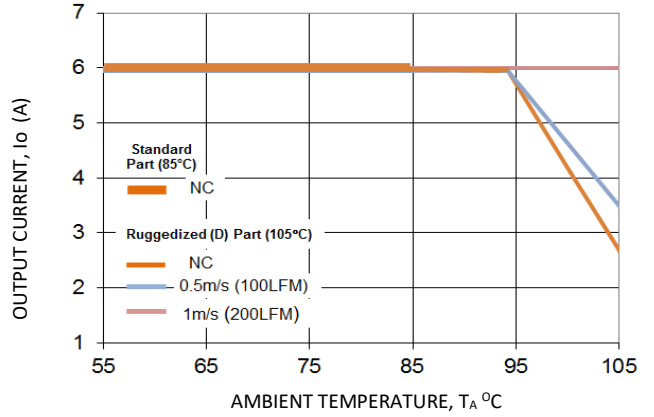


Figure 20. Derating Output Current versus Ambient Temperature and Airflow.

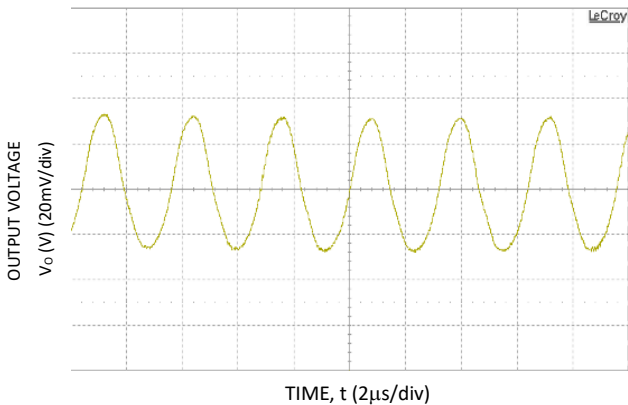


Figure 21. Typical output ripple and noise (VIN = 28V, Io = Io,max).

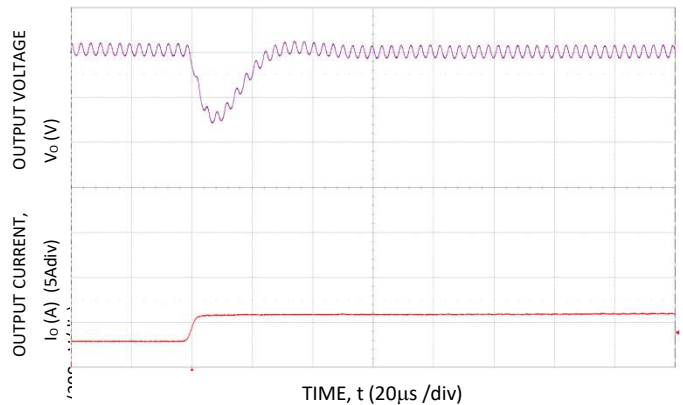


Figure 22. Transient Response to Dynamic Load Change from 50% to 100% at 28Vin, Cext – 5x22µF, CTune= 220pF & RTune=200

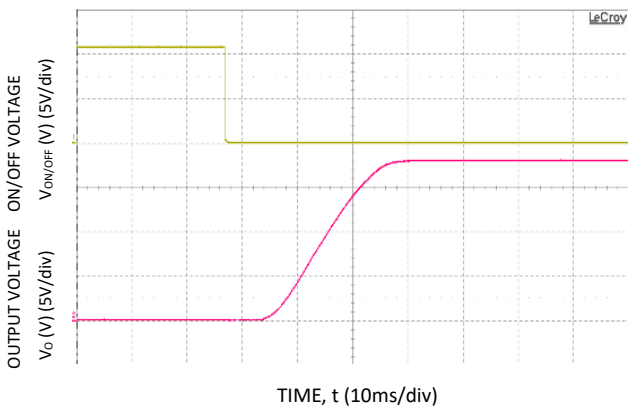


Figure 23. Typical Start-up Using On/Off Voltage (Io = Io,max).

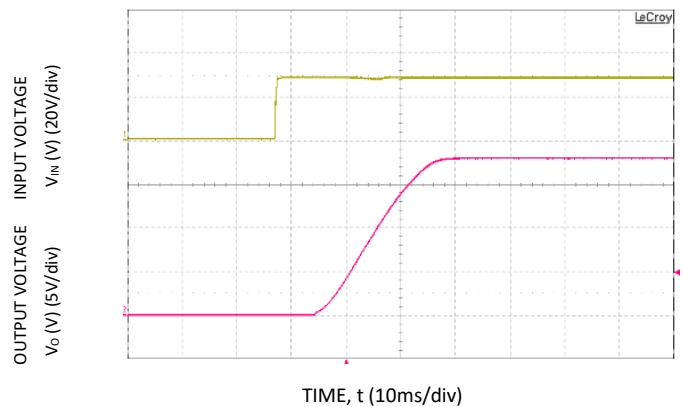



Figure 24. Typical Start-up Using Input Voltage (VIN = 28V, Io = Io,max).

# 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules

9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current


9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 12A to 1.5A Scaled output current

## Test Configurations

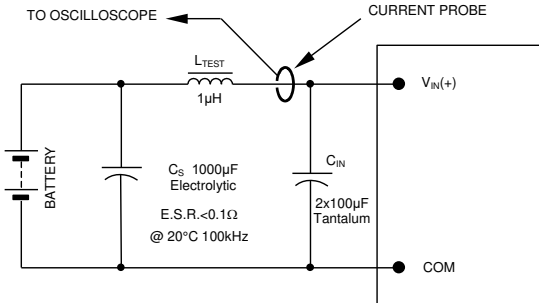


NOTE: Measure input reflected ripple current with a simulated source inductance (L<sub>TEST</sub>) of 1µH. Capacitor C<sub>S</sub> offsets possible battery impedance. Measure current as shown above.

Figure 25. Input Reflected Ripple Current Test Setup.

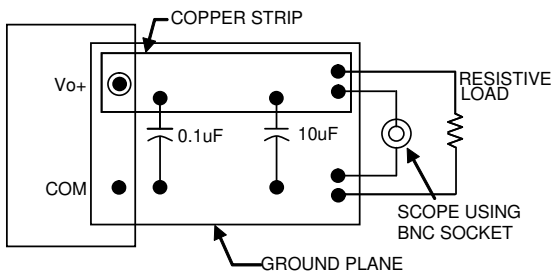

NOTE: All voltage measurements to be taken at the module terminals, as shown above. If sockets are used then Kelvin connections are required at the module terminals to avoid measurement errors due to socket contact resistance.

Figure 26. Output Ripple and Noise Test Setup.

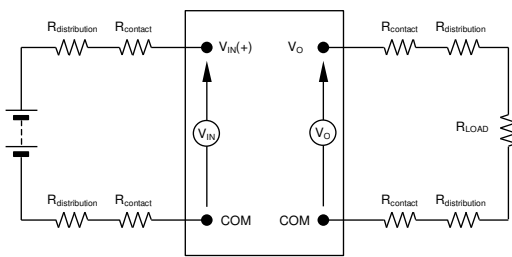

NOTE: All voltage measurements to be taken at the module terminals, as shown above. If sockets are used then Kelvin connections are required at the module terminals to avoid measurement errors due to socket contact resistance.

Figure 27. Output Voltage and Efficiency Test Setup.

$$\text{Efficiency } \eta = \frac{V_O \cdot I_O}{V_{IN} \cdot I_{IN}} \times 100 \%$$

## Design Considerations

### Input Filtering

The 9-36V ProLynx™ module should be connected to a low ac-impedance source. A highly inductive source can affect the stability of the module. An input capacitance must be placed directly adjacent to the input pin of the module, to minimize input ripple voltage and ensure module stability.

To minimize input voltage ripple, ceramic capacitors are recommended at the input of the module. Figure 28 shows the input ripple voltage for various output voltages at maximum load current with 3x10 µF or 4x10 µF ceramic capacitors and an input of 12V, while Fig. 29 shows the input ripple for an input voltage of 28V.

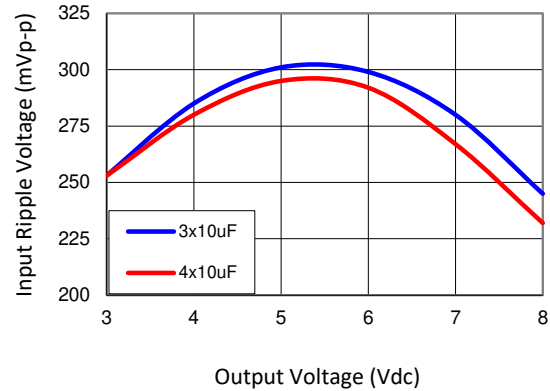


Figure 28. Input ripple voltage for various output voltages with 3x10 µF or 4x10 µF ceramic capacitors at the input (maximum load). Input voltage is 12V. Scope BW at 20MHz

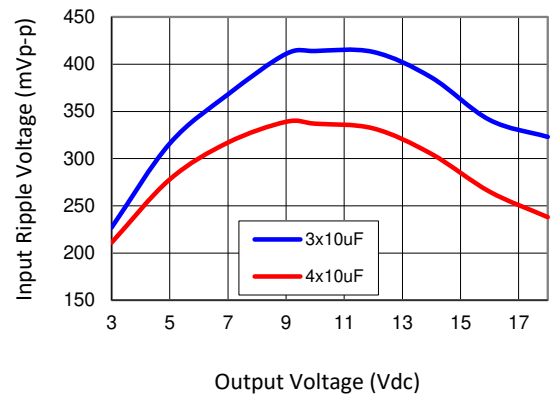


Figure 29. Input ripple voltage for various output voltages with 3x10 µF or 4x10 µF ceramic capacitors at the input (maximum load). Input voltage is 28V. Scope BW at 20MHz

# 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules

9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current

9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 10A to 2A Scaled output current

## Output Filtering

The 9-36V ProLynx™ modules are designed for low output ripple voltage and will meet the maximum output ripple specification with 0.047 μF ceramic and 22 μF ceramic capacitors at the output of the module. However, additional output filtering may be required by the system designer for a number of reasons. First, there may be a need to further reduce the output ripple and noise of the module. Second, the dynamic response characteristics may need to be customized to a particular load step change.

To reduce the output ripple and improve the dynamic response to a step load change, additional capacitance at the output can be used. Low ESR polymer and ceramic capacitors are recommended to improve the dynamic response of the module. Figures 30 and 31 provide output ripple information for different external capacitance values at various Vo and for full load currents. For stable operation of the module, limit the capacitance to less than the maximum output capacitance as specified in the electrical specification table. Optimal performance of the module can be achieved by using the Tunable Loop™ feature described later in this data sheet.

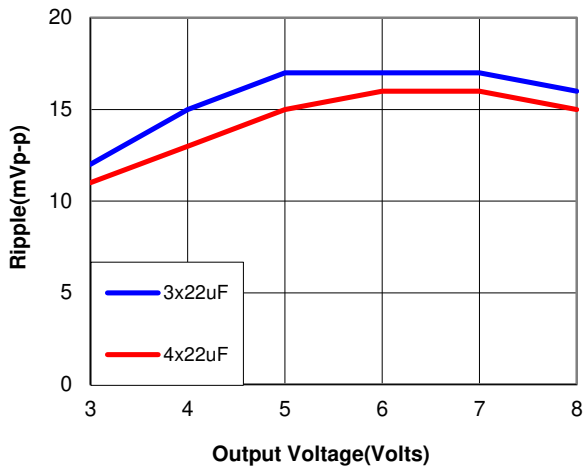


Figure 30. Output ripple with external 3x22 μF or 4x22 μF ceramic capacitors at the output (max. load). Input voltage is 12V. Scope BW at 20MHz

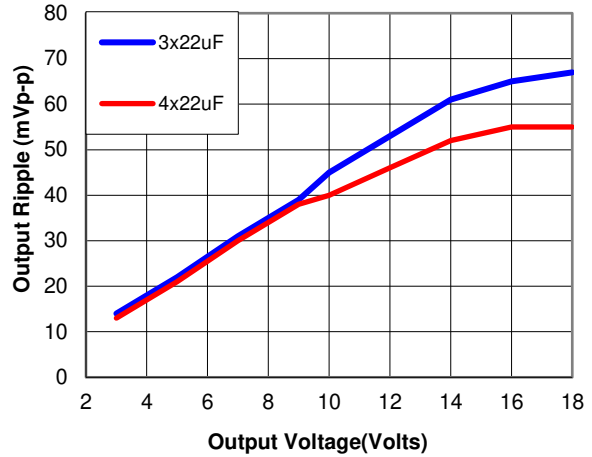


Figure 31. Output ripple voltage with external 3x22 μF or 4x22μF ceramic capacitors at the output (max. load). Input voltage is 28V. Scope BW 20MHz

## Safety Considerations

For safety agency approval the power module must be installed in compliance with the spacing and separation requirements of the end-use safety agency standards, i.e., UL ANSI/UL\* 62368-1 and CAN/CSA+ C22.2 No. 62368-1 Recognized, DIN VDE 0868-1/A11:2017 (EN62368-1:2014/A11:2017)

For the converter output to be considered meeting the Requirements of safety extra-low voltage (SELV) or ES1, the input must meet SELV/ES1 requirements. The power module has extra-low voltage (ELV) outputs when all inputs are ELV.

The input to these units is to be provided with a fast-acting fuse with a maximum rating of 8 A in the positive input lead.

# 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules

9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current

9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 10A to 2A Scaled output current

## Feature Descriptions

### Remote Enable

The 9-36V ProLynx™ modules feature an On/Off pin for remote On/Off operation. Two On/Off logic options are available. In the Positive Logic On/Off option, (device code suffix “4” – see Ordering Information), the module turns ON during a logic High on the On/Off pin and turns OFF during a logic Low. With the Negative Logic On/Off option, (no device code suffix, see Ordering Information), the module turns OFF during logic High and ON during logic Low. The On/Off signal is always referenced to ground.

For positive logic modules, the circuit configuration for using the On/Off pin is shown in Figure 32. When the external transistor Q1 is in the OFF state, the ON/OFF pin is pulled high and transistor Q2 is OFF leading to Q3 also being OFF which turns the module ON. The external resistor  $R_{pullup}$  (100k recommended) must be sized so that  $V_{ON/OFF}$  is never more than 12V when Q1 is OFF. In particular, if  $V_{pullup}$  is made the same as the input voltage  $V_{in}$ , the resistor  $R_{pullup}$  must be large enough so that  $V_{ON/OFF}$  is never more than 12V. If the On/Off pin is left floating the module will be in the ON state.

For negative logic On/Off modules, the circuit configuration is shown in Fig. 33. When the external transistor Q1 is in the ON state, the ON/OFF pin is pulled low causing transistor Q2 to be OFF and the module to be turned ON. To turn the module OFF, Q1 is turned OFF, causing the ON/OFF pin to be pulled high turning Q2 ON and the module to be turned OFF. If the On/Off pin is left floating, the module will be in the ON state.

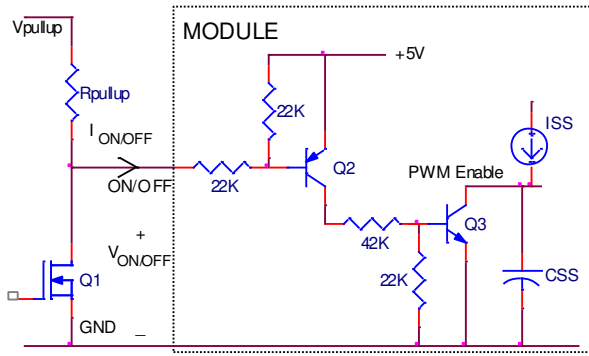


Figure 32. Circuit configuration for using positive On/Off logic.

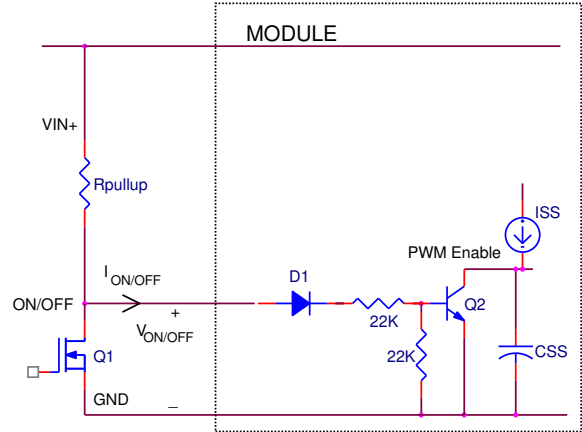


Figure 33. Circuit configuration for using negative On/Off logic.

### Overcurrent Protection

To provide protection in a fault (output overload) condition, the unit is equipped with internal current-limiting circuitry and can endure current limiting continuously. At the point of current-limit inception, the unit enters hiccup mode. The unit operates normally once the output current is brought back into its specified range. The 9-36V ProLynx modules employ an innovative, patent pending, ‘AutoLimit’ capability. This results in automatic scaling of current limit with output voltage through an inverse relationship of the current limit threshold with the output voltage. This feature shown graphically in Fig. 34, allows higher output currents to be drawn from the module at lower output voltages thereby optimizing the power delivery capability of the module.

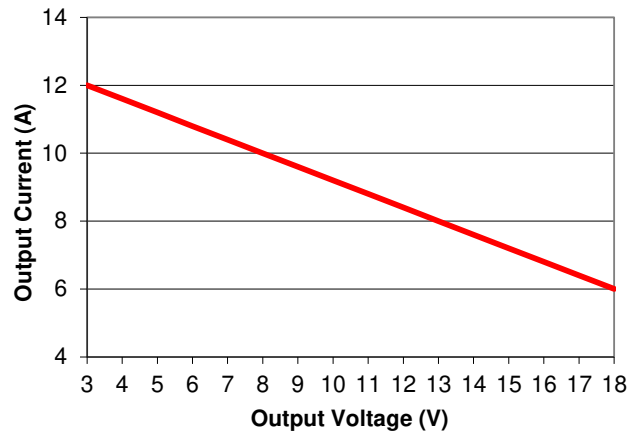


Figure 34. Graph showing maximum output current capability at different output voltages.

### Over Temperature Protection

To provide protection in a fault condition, the unit is equipped with a thermal shutdown circuit. The unit will shutdown if the overtemperature threshold of 130°C is exceeded at the thermal reference point  $T_{ref}$ . The thermal shutdown is not intended as a

# 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules

9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current

9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 10A to 2A Scaled output current

guarantee that the unit will survive temperatures beyond its rating. Once the unit goes into thermal shutdown it will then wait to cool before attempting to restart.

### Input Undervoltage Lockout

At input voltages below the input undervoltage lockout limit, the module operation is disabled. The module will begin to operate at an input voltage above the undervoltage lockout turn-on threshold.

### Output Voltage Programming

The output voltage of the 9-36V ProLynx™ module can be programmed to any voltage from 3Vdc to 18Vdc by connecting a resistor between the Trim and GND pins of the module. Certain restrictions apply on the output voltage set point depending on the input voltage. These are shown in the Output Voltage vs. Input Voltage Set Point Area plot in Fig. 35.

Without an external resistor between Trim and GND pins, the output of the module will be 0.7Vdc. To calculate the value of the trim resistor, *Rtrim* for a desired output voltage, use the following equation:

$$R_{trim} = \left[ \frac{70}{(V_o - 0.7)} \right] k\Omega$$

*Rtrim* is the external resistor in kΩ, and *Vo* is the desired output voltage.

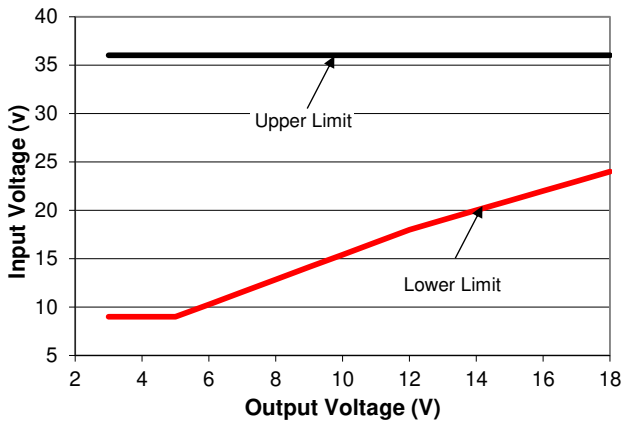


Figure 35. Output Voltage vs. Input Voltage Set Point Area plot showing limits where the output voltage can be set for different input voltages.

Table 1 provides *Rtrim* values required for some common output voltages.

Table 1

| <i>V<sub>o, set</sub></i> (V) | <i>Rtrim</i> (kΩ) |
|-------------------------------|-------------------|
| 3.3                           | 26.92             |
| 5                             | 16.27             |
| 6                             | 13.20             |
| 9                             | 8.43              |
| 12                            | 6.19              |
| 15                            | 4.89              |

|    |      |
|----|------|
| 18 | 4.04 |
|----|------|

By using a ±0.5% tolerance trim resistor with a TC of ±100ppm, a set point tolerance of ±1.5% can be achieved as specified in the electrical specification.

### Remote Sense

The 9-36V ProLynx™ power modules have a Remote Sense feature to minimize the effects of distribution losses by regulating the voltage between the VS+ and Vo pin. The voltage between the VS+ pin and Vo pin should not exceed 0.5V.

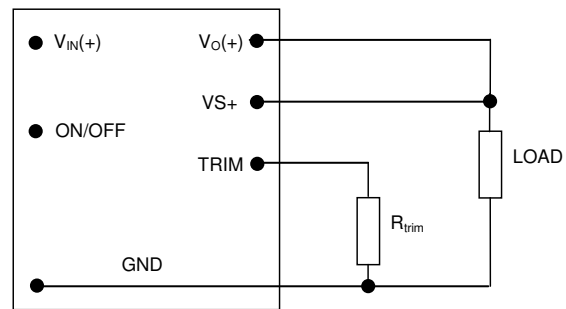


Figure 36. Circuit configuration for programming output voltage using an external resistor.

### Voltage Margining

Output voltage margining can be implemented in the 9-36V ProLynx™ modules by connecting a resistor, *Rmargin-up*, from the Trim pin to the ground pin for margining-up the output voltage and by connecting a resistor, *Rmargin-down*, from the Trim pin to the output pin for margining-down. Figure 37 shows the circuit configuration for output voltage margining. The POL Programming Tool, available at [www.gecriticalpower.com](http://www.gecriticalpower.com) under the Designing Tools section, also calculates the values of *Rmargin-up* and *Rmargin-down* for a specific output voltage and % margin. Please consult your local GE technical representative for additional details.

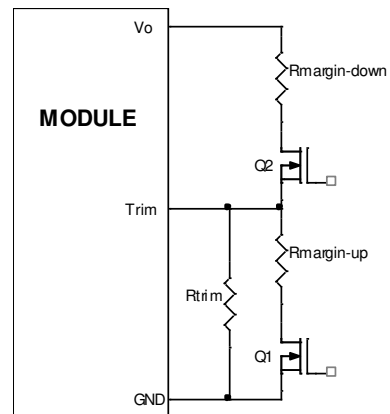


Figure 37. Circuit Configuration for margining Output voltage


## 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules

9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current

9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 10A to 2A Scaled output current

### Synchronization

The module switching frequency can be synchronized to a signal with an external frequency within a specified range. Synchronization can be done by using the external signal applied to the SYNC pin of the module as shown in Fig. 38, with the converter being synchronized by the rising edge of the external signal. The Electrical Specifications table specifies the requirements of the external SYNC signal. If the SYNC pin is not used, the module should free run at the default switching frequency. **If synchronization is not being used, connect the SYNC pin to GND.**

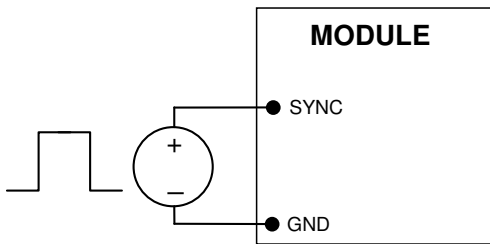

**Figure 38. External source connections to synchronize switching frequency of the module.**

### Tunable Loop™


The 9-36V ProLynx™ modules have a new feature that optimizes transient response of the module called Tunable Loop™.

External capacitors are usually added to the output of the module for two reasons: to reduce output ripple and noise (see Figs 30 and 31) and to reduce output voltage deviations from the steady-state value in the presence of dynamic load current changes. Adding external capacitance however affects the voltage control loop of the module, typically causing the loop to slow down with sluggish response. Larger values of external capacitance could also cause the module to become unstable.

The Tunable Loop™ allows the user to externally adjust the voltage control loop to match the filter network connected to the output of the module. The Tunable Loop™ is implemented by connecting a series R-C between the VS+ and TRIM pins of the module, as shown in Fig. 38. This R-C allows the user to externally adjust the voltage loop feedback compensation of the module.

Recommended values of  $R_{TUNE}$  and  $C_{TUNE}$  for different output capacitor combinations are given in Tables 2, 3 and 4. Tables 2 and 3 show recommended values of  $R_{TUNE}$  and  $C_{TUNE}$  for different values of ceramic output capacitors up to 100µF that might be needed for an application to meet output ripple and noise requirements. Selecting  $R_{TUNE}$  and  $C_{TUNE}$  according to Tables 2 and 3 will ensure stable operation of the module

In applications with tight output voltage limits in the presence of dynamic current loading, additional output capacitance will be required. Table 4 lists recommended values of  $R_{TUNE}$  and  $C_{TUNE}$  in order to meet 2% output voltage deviation limits for some common output voltages in the presence of a 50% of full load step change with an input voltage of 12 or 28V.

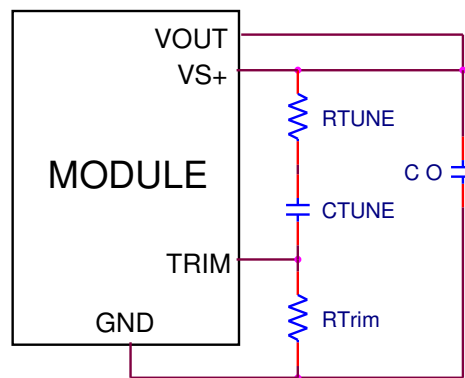

**Figure 39. Circuit diagram showing connection of  $R_{TUNE}$  and  $C_{TUNE}$  to tune the control loop of the module.**

Please contact your GE technical representative to obtain more details of this feature as well as for guidelines on how to select the right value of external R-C to tune the module for best

## 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules

9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current

9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 10A to 2A Scaled output current

transient performance and stable operation for other output capacitance values or input voltages other than 12 / 28V.

**Table 2. General recommended values of  $R_{TUNE}$  and  $C_{TUNE}$  for  $V_{in}=12V$  and various external ceramic capacitor combinations.**

$V_o=5V$

| $C_o$      | 5x22 $\mu$ F | 6x22 $\mu$ F | 7x22 $\mu$ F | 8x22 $\mu$ F | 10x22 $\mu$ F |
|------------|--------------|--------------|--------------|--------------|---------------|
| $R_{TUNE}$ | 300          | 300          | 240          | 240          | 240           |
| $C_{TUNE}$ | 2700p        | 3300p        | 3900p        | 4700p        | 6800p         |

**Table 3. General recommended values of  $R_{TUNE}$  and  $C_{TUNE}$  for  $V_{in}=28V$  and various external ceramic capacitor combinations.**

$V_o=5V$

| $C_o$      | 5x22 $\mu$ F | 6x22 $\mu$ F | 7x22 $\mu$ F | 8x22 $\mu$ F | 10x22 $\mu$ F |
|------------|--------------|--------------|--------------|--------------|---------------|
| $R_{TUNE}$ | 300          | 300          | 240          | 240          | 240           |
| $C_{TUNE}$ | 1800p        | 2200p        | 3900p        | 3300p        | 3900p         |

$V_o=12V$

| $C_o$      | 5x22 $\mu$ F | 6x22 $\mu$ F | 7x22 $\mu$ F | 8x22 $\mu$ F | 10x22 $\mu$ F |
|------------|--------------|--------------|--------------|--------------|---------------|
| $R_{TUNE}$ | 300          | 300          | 300          | 300          | 240           |
| $C_{TUNE}$ | 560p         | 820p         | 1000p        | 1200p        | 1800p         |

**Table 4. Recommended values of  $R_{TUNE}$  and  $C_{TUNE}$  to obtain transient deviation of 2% of  $V_{out}$  for a 50% of full load step.**

| $V_{in}$            | 12V                          |                              | 28V                          |                              |                              |              |
|---------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|--------------|
|                     | 3.3V                         | 5V                           | 3.3V                         | 5V                           | 12V                          | 18V          |
| $\Delta I$          | 6A                           | 5.5A                         | 6A                           | 5.5A                         | 4.2                          | 3A           |
| $C_o$               | 2x22 $\mu$ F + 2x330 $\mu$ F | 1x22 $\mu$ F + 1x330 $\mu$ F | 2x22 $\mu$ F + 2x330 $\mu$ F | 1x22 $\mu$ F + 1x330 $\mu$ F | 1x22 $\mu$ F + 1x470 $\mu$ F | 5x22 $\mu$ F |
| $R_{TUNE} (\Omega)$ | 200                          | 200                          | 200                          | 200                          | 200                          | 200          |
| $C_{TUNE}$          | 22nF                         | 12nF                         | 15nF                         | 5.6nF                        | 1.5nF                        | 220pF        |
| $\Delta V$          | 50mV                         | 72mV                         | 33mV                         | 58mV                         | 79mV                         | 247mV        |

9 mohm POSCAP 330 $\mu$ F-6TPF330M9L

25 mohm Nichicon 470 $\mu$ F, 16V

22 $\mu$ F, 25Vrated Ceramic Cap - GRM32ER71E226KE15L

# 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules

9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current  
 9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 10A to 2A Scaled output current

## Thermal Considerations

Power modules operate in a variety of thermal environments; however, sufficient cooling should always be provided to help ensure reliable operation.

Considerations include ambient temperature, airflow, module power dissipation, and the need for increased reliability. A reduction in the operating temperature of the module will result in an increase in reliability. The thermal data presented here is based on physical measurements taken in a wind tunnel. The test set-up is shown in Figure 40. The preferred airflow direction for the module is in Figure 41. The derating data applies to airflow in either direction of the module’s short axis.

The thermal reference points,  $T_{ref}$  used in the specifications are also shown in Figure 41. For reliable operation the temperatures at these points should not exceed 118°C. The output power of the module should not exceed the rated power of the module ( $V_{o,set} \times I_{o,max}$ ).

Please refer to the Application Note “Thermal Characterization Process For Open-Frame Board-Mounted Power Modules” for a detailed discussion of thermal aspects including maximum device temperatures.

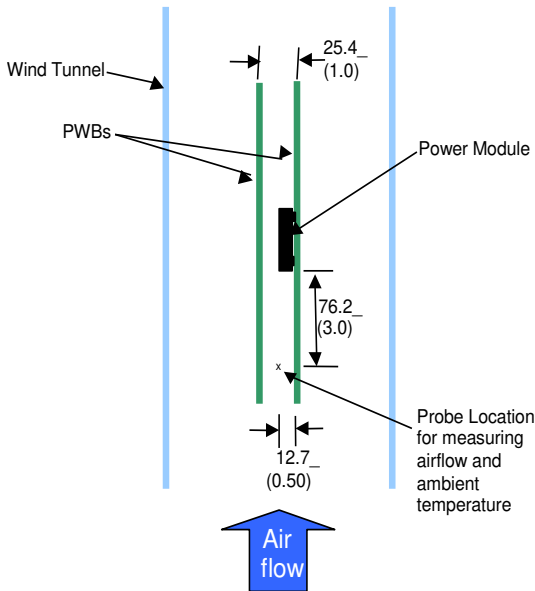


Figure 40. Thermal Test Setup.

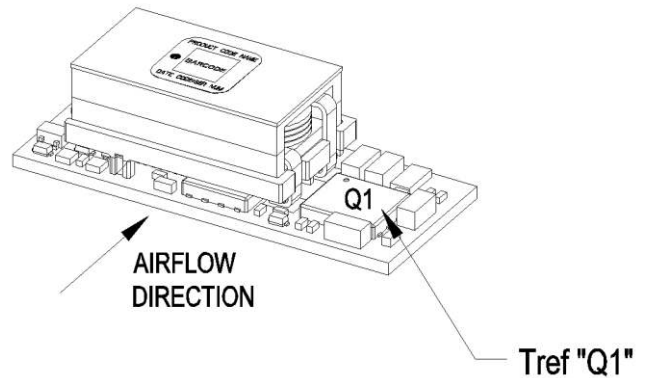


Figure 41. Preferred airflow direction and location of hot-spot of the module ( $T_{ref}$ ).



## 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules

9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current

9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 12A to 1.5A Scaled output current

### Shock and Vibration

The ruggedized (-D version) of the modules are designed to withstand elevated levels of shock and vibration to be able to operate in harsh environments. The ruggedized modules have been successfully tested to the following conditions:

#### Non operating random vibration:

Random vibration tests conducted at 25C, 10 to 2000Hz, for 30 minutes each level, starting from 30Grms (Z axis) and up to 50Grms (Z axis). The units were then subjected to two more tests of 50Grms at 30 minutes each for a total of 90 minutes.

#### Operating shock to 40G per Mil Std. 810G, Method 516.4 Procedure I:

The modules were tested in opposing directions along each of three orthogonal axes, with waveform and amplitude of the shock impulse characteristics as follows:

All shocks were half sine pulses, 11 milliseconds (ms) in duration in all 3 axes.

Units were tested to the Functional Shock Test of MIL-STD-810, Method 516.4, Procedure I - Figure 516.4-4. A shock magnitude of 40G was utilized. The operational units were subjected to three shocks in each direction along three axes for a total of eighteen shocks.

#### Operating vibration per Mil Std 810G, Method 514.5 Procedure I:

The ruggedized (-D version) modules are designed and tested to vibration levels as outlined in MIL-STD-810G, Method 514.5, and Procedure 1, using the Power Spectral Density (PSD) profiles as shown in Table 1 and Table 2 for all axes. Full compliance with performance specifications was required during the performance test. No damage was allowed to the module and full compliance to performance specifications was required when the endurance environment was removed. The module was tested per MIL-STD-810, Method 514.5, Procedure I, for functional (performance) and endurance random vibration using the performance and endurance levels shown in Table 5 and Table 6 for all axes. The performance test has been split, with one half accomplished before the endurance test and one half after the endurance test (in each axis). The duration of the performance test was at least 16 minutes total per axis and at least 120 minutes total per axis for the endurance test. The endurance test period was 2 hours minimum per axis.

Table 5: Performance Vibration Qualification - All Axes

| Frequency (Hz) | PSD Level (G <sup>2</sup> /Hz) | Frequency (Hz) | PSD Level (G <sup>2</sup> /Hz) | Frequency (Hz) | PSD Level (G <sup>2</sup> /Hz) |
|----------------|--------------------------------|----------------|--------------------------------|----------------|--------------------------------|
| 10             | 1.14E-03                       | 170            | 2.54E-03                       | 690            | 1.03E-03                       |
| 30             | 5.96E-03                       | 230            | 3.70E-03                       | 800            | 7.29E-03                       |
| 40             | 9.53E-04                       | 290            | 7.99E-04                       | 890            | 1.00E-03                       |
| 50             | 2.08E-03                       | 340            | 1.12E-02                       | 1070           | 2.67E-03                       |
| 90             | 2.08E-03                       | 370            | 1.12E-02                       | 1240           | 1.08E-03                       |
| 110            | 7.05E-04                       | 430            | 8.84E-04                       | 1550           | 2.54E-03                       |
| 130            | 5.00E-03                       | 490            | 1.54E-03                       | 1780           | 2.88E-03                       |
| 140            | 8.20E-04                       | 560            | 5.62E-04                       | 2000           | 5.62E-04                       |

Table 6: Endurance Vibration Qualification - All Axes

| Frequency (Hz) | PSD Level (G <sup>2</sup> /Hz) | Frequency (Hz) | PSD Level (G <sup>2</sup> /Hz) | Frequency (Hz) | PSD Level (G <sup>2</sup> /Hz) |
|----------------|--------------------------------|----------------|--------------------------------|----------------|--------------------------------|
| 10             | 0.00803                        | 170            | 0.01795                        | 690            | 0.00727                        |
| 30             | 0.04216                        | 230            | 0.02616                        | 800            | 0.05155                        |
| 40             | 0.00674                        | 290            | 0.00565                        | 890            | 0.00709                        |
| 50             | 0.01468                        | 340            | 0.07901                        | 1070           | 0.01887                        |
| 90             | 0.01468                        | 370            | 0.07901                        | 1240           | 0.00764                        |
| 110            | 0.00498                        | 430            | 0.00625                        | 1550           | 0.01795                        |
| 130            | 0.03536                        | 490            | 0.01086                        | 1780           | 0.02035                        |
| 140            | 0.0058                         | 560            | 0.00398                        | 2000           | 0.00398                        |

## 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules


9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current

9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 10A to 2A Scaled output current

### Example Application Circuit

#### Requirements:

|                          |  |
|--------------------------|--|
| V <sub>in</sub> :        | 28V  |
| V <sub>out</sub> :       | 12V  |
| I <sub>out</sub> :       | 6.3A max., worst case load transient is from 4.2 A to 6.3 A    |
| ΔV <sub>out</sub> :      | 1.5% of V <sub>out</sub> (180mV) for worst case load transient |
| V <sub>in</sub> , ripple | 1.5% of V <sub>in</sub> (420mV, p-p)                           |

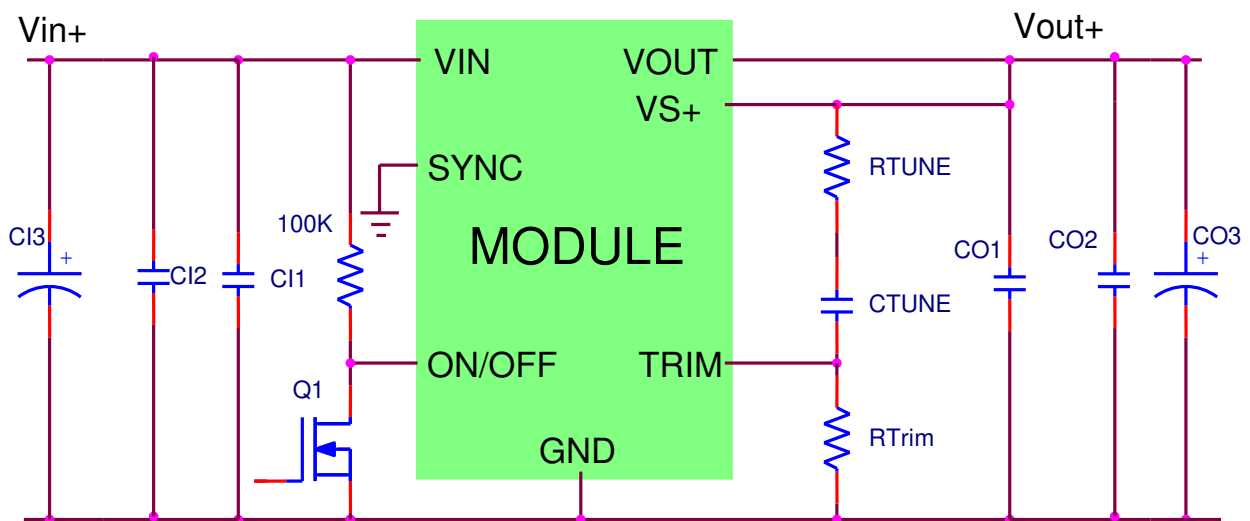

|       |  |
|-------|--|
| CI1   | 1 x 0.01μF/50V, 0603 ceramic capacitor                                   |
| CI2   | 4 x 10μF/50V ceramic capacitor (e.g. Murata GRM32ER71H106K)              |
| CI3   | 47μF/63V bulk electrolytic   |
| CO1   | 1 x 0.01μF/25V, 0306 ceramic capacitor (e.g. Murata LLL185R71E103MA01L)) |
| CO2   | 4 x 22μF/25V ceramic capacitor (e.g. Murata GRM32ER71E226KE15L)          |
| CO3   | NA   |
| CTune | 470p ceramic capacitor (can be 1206, 0805 or 0603 size)                  |
| RTune | 200 ohms SMT resistor (can be 1206, 0805 or 0603 size)                   |
| RTrim | 6.19KΩ resistor  |

# 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules

9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current


9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 10A to 2A Scaled output current

## Mechanical Outline

Dimensions are in millimeters and (inches).

Tolerances: x.x mm ± 0.5 mm (x.xx in. ± 0.02 in.) [unless otherwise indicated]

x.xx mm ± 0.25 mm (x.xxx in ± 0.010 in.)

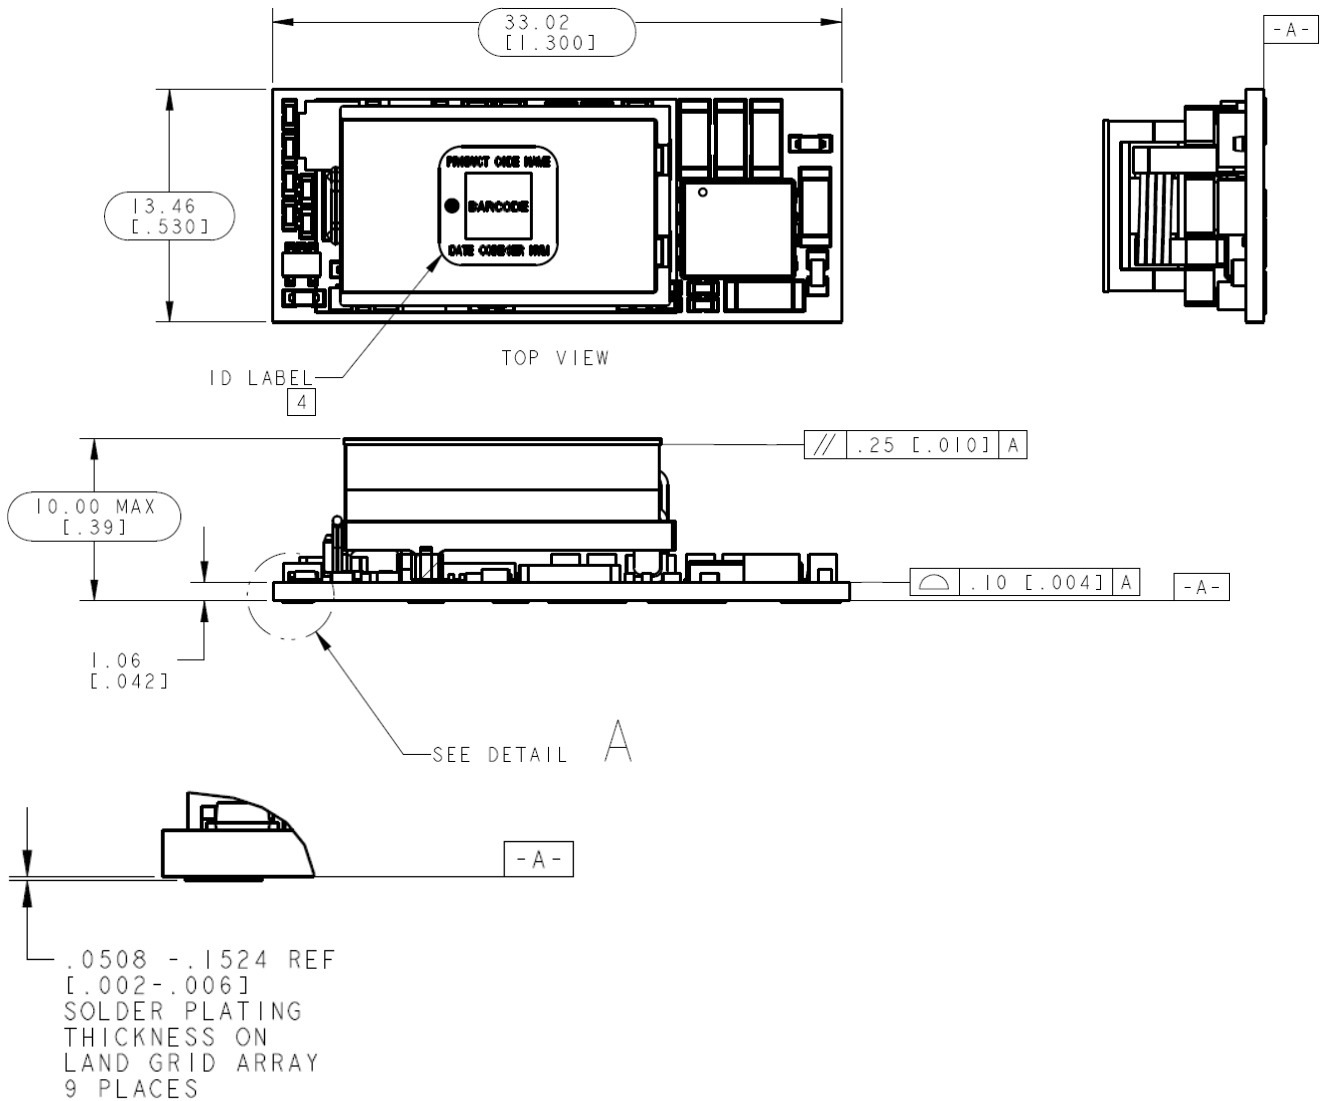

# 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules

9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current


9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 10A to 2A Scaled output current

## Recommended Pad Layout

Dimensions are in millimeters and (inches).

Tolerances: x.x mm ± 0.5 mm (x.xx in. ± 0.02 in.) [unless otherwise indicated]

x.xx mm ± 0.25 mm (x.xxx in ± 0.010 in.)

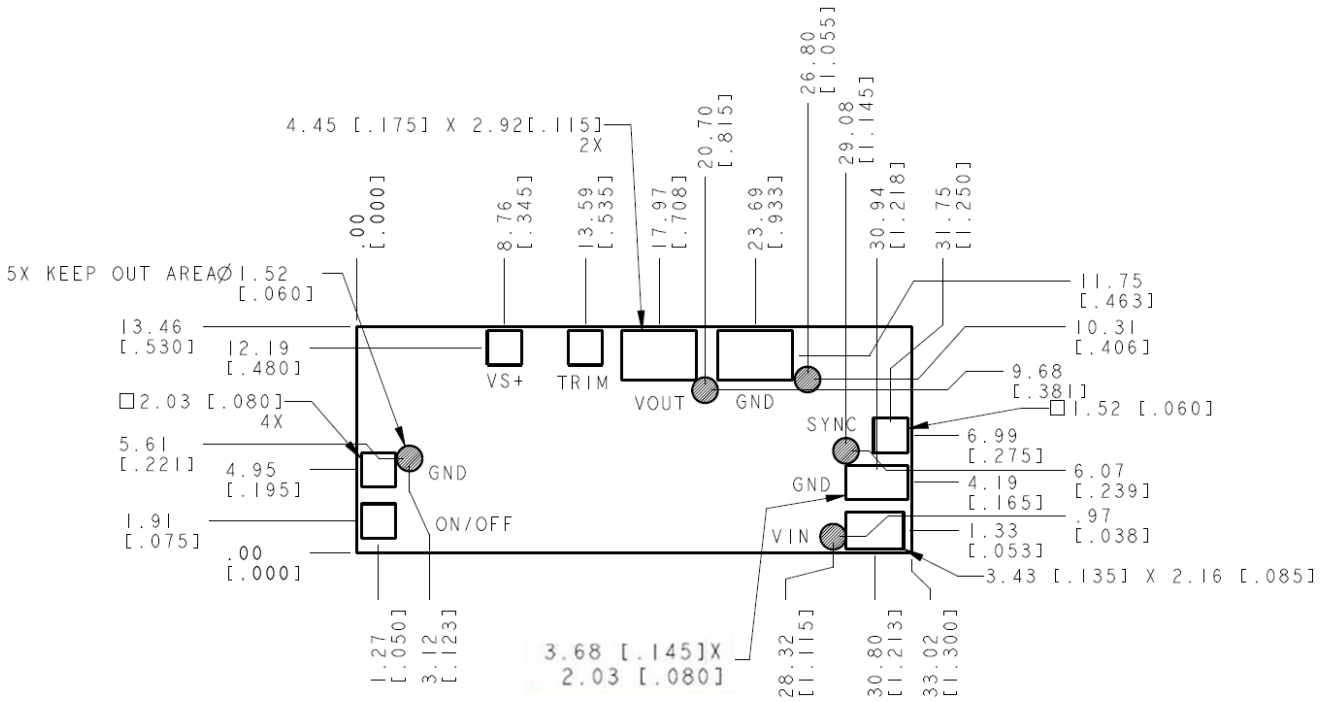

| PIN | FUNCTION        | PIN | FUNCTION         |
|-----|-----------------|-----|------------------|
| 1   | On/Off          | 6   | V <sub>OUT</sub> |
| 2   | V <sub>IN</sub> | 7   | TRIM             |
| 3   | GND             | 8   | VS+              |
| 4   | SYNC            | 9   | GND              |
| 5   | GND             | 10  |                  |

# 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules


9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current

9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 10A to 2A Scaled output current

## Packaging Details

The 9-36V ProLynx™ modules are supplied in tape & reel as standard. Modules are shipped in quantities of 250 modules per reel.

All Dimensions are in millimeters and (in inches).

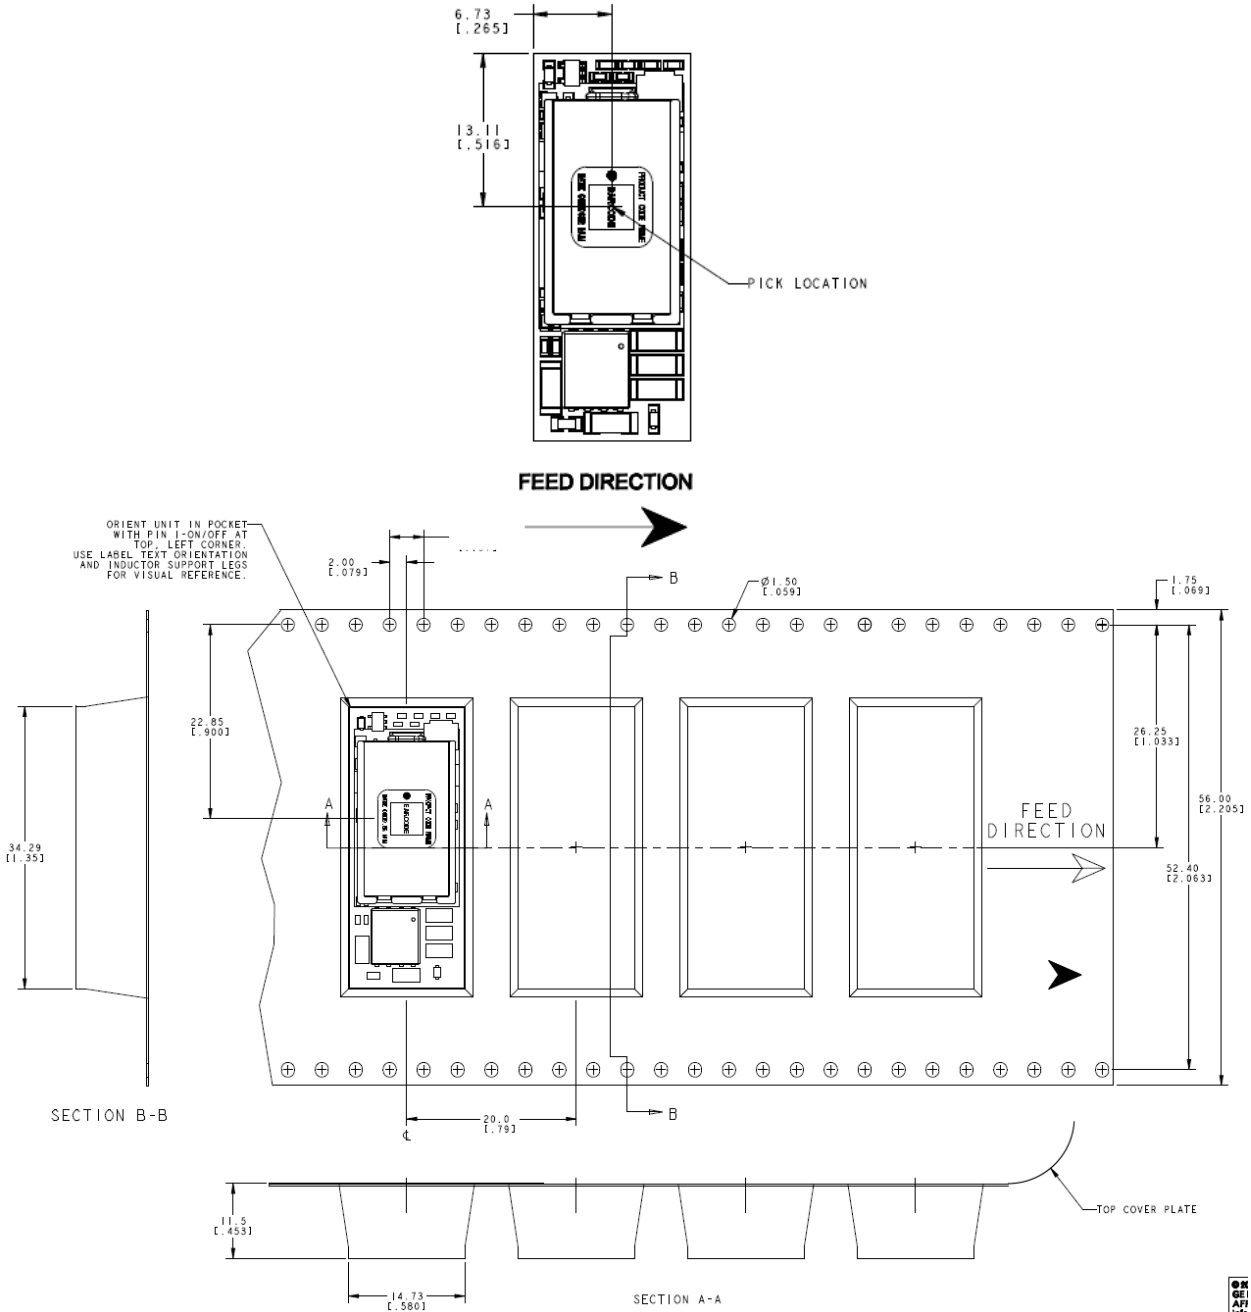

|                     |                   |
|---------------------|-------------------|
| Reel Dimensions:    |                   |
| Outside Dimensions: | 330.2 mm (13.00") |
| Inside Dimensions:  | 177.8 mm (7.00")  |
| Tape Width:         | 56.00 mm (2.205") |

## 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules

9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current

9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 10A to 2A Scaled output current

### Surface Mount Information

#### Pick and Place

The 9-36V ProLynx™ modules use an open frame construction and are designed for a fully automated assembly process. The modules are fitted with a label designed to provide a large surface area for pick and place operations. The label meets all the requirements for surface mount processing, as well as safety standards, and is able to withstand reflow temperatures of up to 300°C. The label also carries product information such as product code, serial number and the location of manufacture.

#### Nozzle Recommendations

The module weight has been kept to a minimum by using open frame construction. Variables such as nozzle size, tip style, vacuum pressure and placement speed should be considered to optimize this process. The minimum recommended inside nozzle diameter for reliable operation is 3mm. The maximum nozzle outer diameter, which will safely fit within the allowable component spacing, is 7 mm.

#### Bottom Side / First Side Assembly

This module is not recommended for assembly on the bottom side of a customer board. If such an assembly is attempted, components may fall off the module during the second reflow process.

#### Lead Free Soldering

The 9-36V ProLynx™ modules are lead-free (Pb-free) and RoHS compliant and fully compatible in a Pb-free soldering process. Failure to observe the instructions below may result in the failure of or cause damage to the modules and can adversely affect long-term reliability.

#### Pb-free Reflow Profile

Power Systems will comply with J-STD-020 Rev. D (Moisture/Reflow Sensitivity Classification for Nonhermetic Solid State Surface Mount Devices) for both Pb-free solder profiles and MSL classification procedures. This standard provides a recommended forced-air-convection reflow profile based on the volume and thickness of the package (table 4-2). The suggested Pb-free solder paste is Sn/Ag/Cu (SAC). The recommended linear reflow profile using Sn/Ag/Cu solder is shown in Fig. 42. Soldering outside of the recommended profile requires testing to verify results and performance.

For questions regarding Land grid array(LGA) soldering, solder volume; please contact GE for special manufacturing process instructions.

#### MSL Rating

The 9-36V ProLynx™ modules have a MSL rating of 2A

### Storage and Handling

The recommended storage environment and handling procedures for moisture-sensitive surface mount packages is detailed in J-STD-033 Rev. A (Handling, Packing, Shipping and Use of Moisture/Reflow Sensitive Surface Mount Devices). Moisture barrier bags (MBB) with desiccant are required for MSL ratings of 2 or greater. These sealed packages should not be broken until time of use. Once the original package is broken, the floor life of the product at conditions of  $\leq 30^{\circ}\text{C}$  and 60% relative humidity varies according to the MSL rating (see J-STD-033A). The shelf life for dry packed SMT packages will be a minimum of 12 months from the bag seal date, when stored at the following conditions:  $< 40^{\circ}\text{C}$ ,  $< 90\%$  relative humidity.

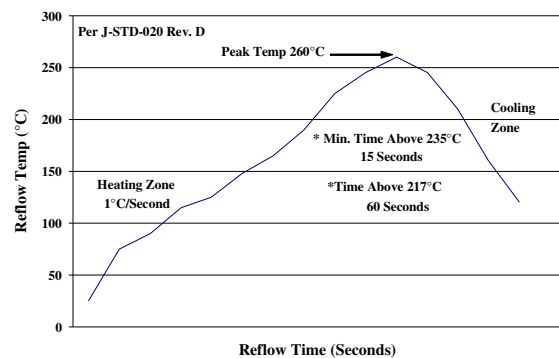


Figure 42. Recommended linear reflow profile using Sn/Ag/Cu solder.

### Post Solder Cleaning and Drying Considerations

Post solder cleaning is usually the final circuit-board assembly process prior to electrical board testing. The result of inadequate cleaning and drying can affect both the reliability of a power module and the testability of the finished circuit-board assembly. For guidance on appropriate soldering, cleaning and drying procedures, refer to *Board Mounted Power Modules: Soldering and Cleaning Application Note (AN04-001)*.


## 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules

9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current

9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 10A to 2A Scaled output current

### EMC Considerations

The circuit below and plots in Figures 43 and 44 show a suggested configuration to meet the radiated emission limits of EN55022 Class A. Actual performance depends on layout and external components used.

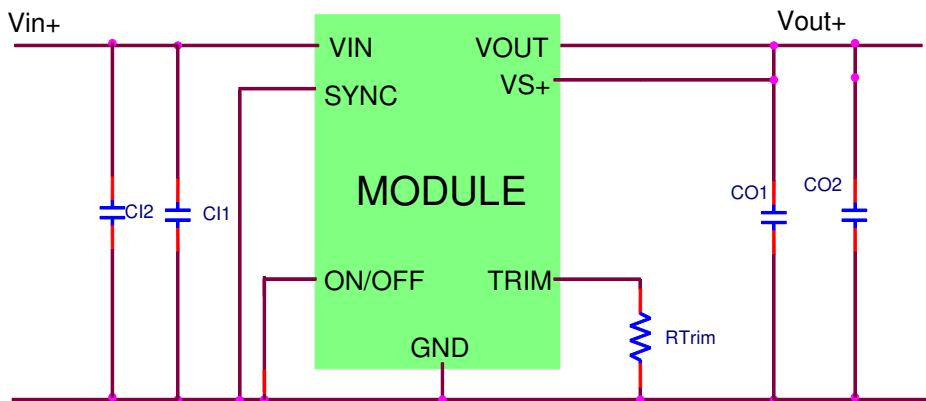


|       |  |
|-------|--|
| C1    | 1 x 0.01 $\mu$ F/50V, 0603 ceramic capacitor                     |
| C2    | 10 $\mu$ F/50V,  |
| CO1   | 1 x 0.01 $\mu$ F/25V, 0603 ceramic capacitor                     |
| CO2   | 10 $\mu$ F/50V ceramic capacitor (e.g. Murata GCM32ER71E106KA42) |
| RTrim | 16.3k $\Omega$ resistor  |

9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules  
 9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current  
 9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 10A to 2A Scaled output current


**AUDIX**  
 Audix Technology (Shanghai) Co., Ltd.  
 3F #34Bldg. No.680 GuiPing Rd., CaoHeJing  
 Hi-Tech Park, Shanghai 200233, China  
 Tel: +86-21-64955500 Fax: +86-21-64955491  
 audixaci@audix.com

**AUDIX**  
 Audix Technology (Shanghai) Co., Ltd.  
 3F #34Bldg. No.680 GuiPing Rd., CaoHeJing  
 Hi-Tech Park, Shanghai 200233, China  
 Tel: +86-21-64955500 Fax: +86-21-64955491  
 audixaci@audix.com

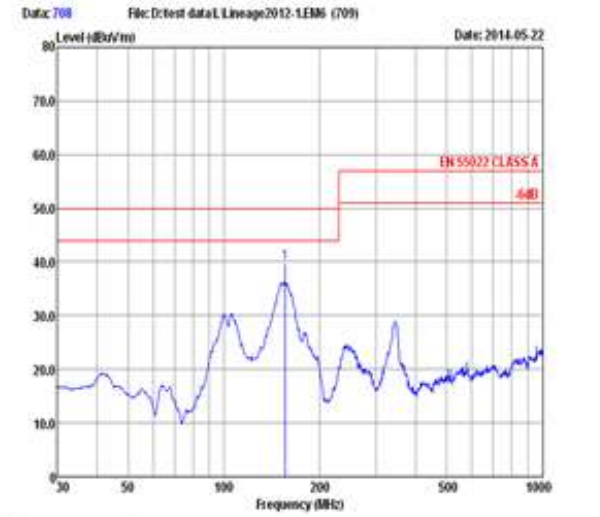

Site : site  
 Condition : EN 55022 CLASS A HORIZONTAL  
 Project No. :  
 Applicant :  
 EUT :  
 M/N : APXW012  
 S/N : 5V 9A  
 Power Supply : DC12V  
 Ambient : 22°C 60%RH  
 Test Mode : Full Load  
 Test Engineer: Mark  
 Memo :

|      | Feed   | CableAntenna | Limit       | Over   |       |       |        |    |
|------|--------|--------------|-------------|--------|-------|-------|--------|----|
| Freq | Level  | Loss Factor  | Level       | Line   |       |       |        |    |
| MHz  | dBuV   | dB           | dB/m dBuV/m | dBuV/m |       |       |        |    |
| 1    | 155.78 | 38.61        | 1.56        | 9.46   | 39.63 | 50.00 | -10.37 | QP |

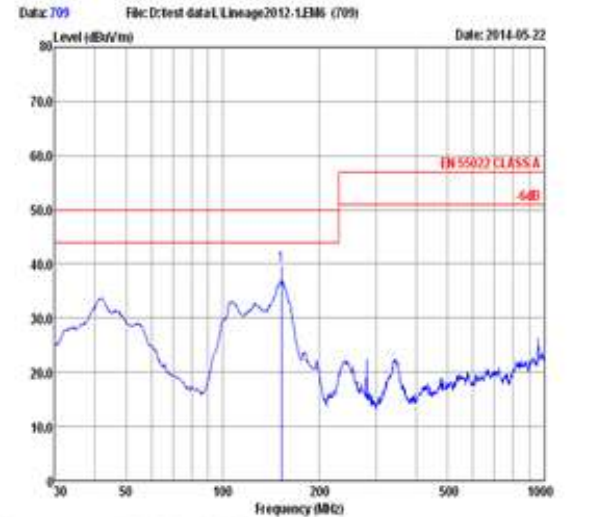

Site : Audix(Shanghai) Chamber3  
 Condition : EN 55022 CLASS A VERTICAL  
 Project No. :  
 Applicant :  
 EUT :  
 M/N : APXW012  
 S/N : 5V 9A  
 Power Supply : DC12V  
 Ambient : 22°C 60%RH  
 Test Mode : Full Load  
 Test Engineer: Mark  
 Memo :

|      | Feed   | CableAntenna | Limit       | Over   |       |       |        |    |
|------|--------|--------------|-------------|--------|-------|-------|--------|----|
| Freq | Level  | Loss Factor  | Level       | Line   |       |       |        |    |
| MHz  | dBuV   | dB           | dB/m dBuV/m | dBuV/m |       |       |        |    |
| 1    | 152.30 | 28.00        | 1.53        | 10.05  | 39.58 | 50.00 | -10.42 | QP |

Fig 43 – EMI Plot of APXW012 on evaluation board with 12 V in, 5Vo @ 9 A out



9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules

9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current


9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 10A to 2A Scaled output current



Audix Technology (Shanghai) Co., Ltd.  
 3F #34Bldg. No.680 GuiPing Rd.,CaoBeijing  
 Hi-Tech Park,Shanghai 200233, China  
 Tel:+86-21-64955500 Fax:+86-21-64955491  
 audixaci@audix.com




Audix Technology (Shanghai) Co., Ltd.  
 3F #34Bldg. No.680 GuiPing Rd.,CaoBeijing  
 Hi-Tech Park,Shanghai 200233, China  
 Tel:+86-21-64955500 Fax:+86-21-64955491  
 audixaci@audix.com

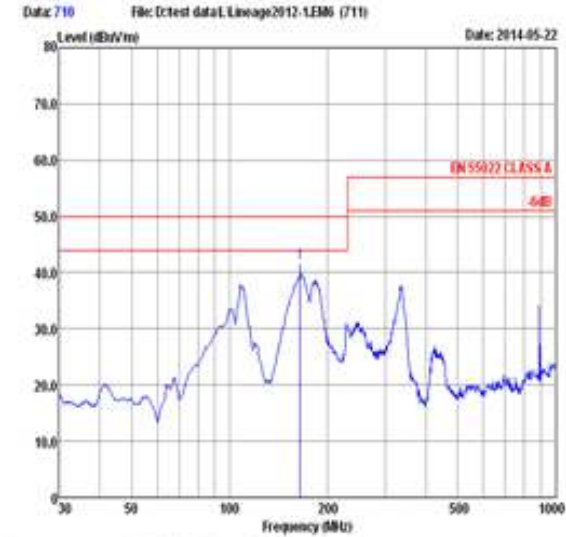

Site : Audix(Shanghai) Chamber3  
 Condition : EN 55022 CLASS A HORIZONTAL  
 Project No. :  
 Applicant :  
 EUT :  
 M/N : APXW012  
 S/N : SV 9A  
 Power Supply : DC 28V  
 Ambient : 22°C 60%RH  
 Test Mode : Full Load  
 Test Engineer: Mark  
 Memo :

| Freq | Feed   |             | CableAntenna |             | Limit  |       | Over     |
|------|--------|-------------|--------------|-------------|--------|-------|----------|
|      | Level  | Loss Factor | Level        | Loss Factor | Line   | Limit | Remark   |
| MHz  | dBuV   | dB          | dB/m         | dBuV/m      | dBuV/m | dB    |          |
| 1    | 164.18 | 10.69       | 1.61         | 9.29        | 41.59  | 50.00 | -8.41 QF |

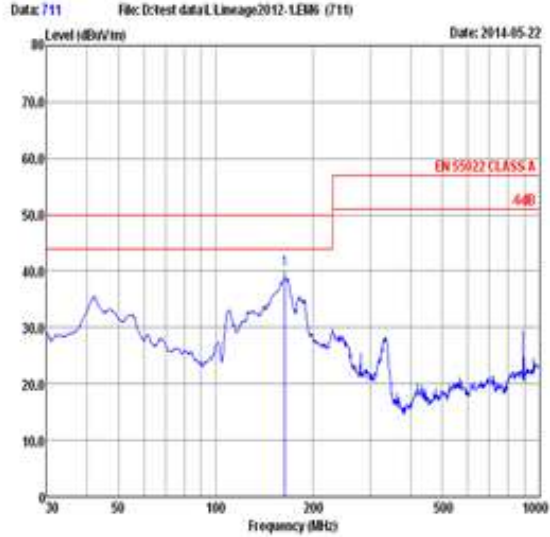

Site : Audix(Shanghai) Chamber3  
 Condition : EN 55022 CLASS A VERTICAL  
 Project No. :  
 Applicant :  
 EUT :  
 M/N : APXW012  
 S/N : SV 9A  
 Power Supply : DC 28V  
 Ambient : 22°C 60%RH  
 Test Mode : Full Load  
 Test Engineer: Mark  
 Memo :

| Freq | Feed   |             | CableAntenna |             | Limit  |       | Over     |
|------|--------|-------------|--------------|-------------|--------|-------|----------|
|      | Level  | Loss Factor | Level        | Loss Factor | Line   | Limit | Remark   |
| MHz  | dBuV   | dB          | dB/m         | dBuV/m      | dBuV/m | dB    |          |
| 1    | 163.54 | 29.29       | 1.61         | 9.20        | 40.10  | 50.00 | -9.02 QF |

Fig 44 – EMI Plot of APXW012 on evaluation board with 28 V in in / 5 Vdc @ 9 A out

# 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules

9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current  
 9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 12A to 1.5A Scaled output current

## Negative Output Operation

### Basic Scheme

The 9-36V ProLynx™ modules can also be used to create negative output voltages from a positive input voltage. Changing the input connection to as shown in Figure 45 converts the module from a synchronous buck converter to a synchronous flyback converter

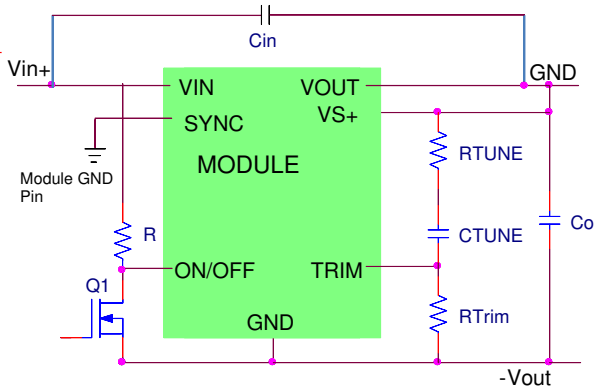


Figure 45. Schematic Connection of 12A ProLynx module for negative output applications.

### Remote Enable

Figures 33 and 34 still apply for remote On/Off operation. However the On/Off threshold is now with respect to -Vout instead of Ground. Before the module turns on, output is zero so GND and -Vout are at the same potential. After the module turns on, -Vout moves down and so will the ON/OFF threshold. The following level shifting circuit can be used in applications to limit exposure of the negative output voltage to the On/Off circuitry.

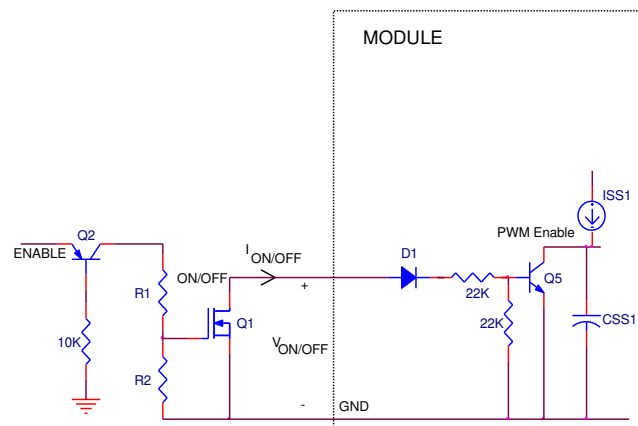


Figure 46. On/Off Level Shifting Circuit for the 12A ProLynx module for negative output applications.

Instead of directly turning Q1 On, the level shifting circuit is used to turn Q1 On by first turning Q2 ON. When Q1 is in the ON state, the ON/OFF pin is pulled low causing transistor Q5 to be OFF and the module to be turned ON. Both Q1 and Q2

are external transistors. To turn the module OFF, Q2 is turned OFF, which turns Q1 OFF causing the ON/OFF pin to be pulled high turning Q5 ON and the module to be turned OFF. If the On/Off pin is left floating, the module will be in the OFF state.

### Input Voltage Range

The 9-36V ProLynx™ modules when connected in a negative output application will support a maximum input voltage which is also a function of the output voltage. The sum of the applied input voltage and magnitude of the output voltage cannot exceed 36V.  $V_{in}(\text{applied}) + |V_{out}| \leq 36$  and  $V_{out} \leq -3V$ . For e.g. with a -12V output system the max input voltage that can be applied is only 24V. However, Figure 35 showing variation of output voltage with Input Voltage should still be considered for determining the required minimum input voltage.

Input voltage turn-on threshold remains the same as the positive output connection. However the input turn-off threshold tracks the output voltage and is reduced by the same level. The listed input Turn-Off threshold of 7.35V when applied to a -3.3Vout application will be measured as a 4.05V ( $7.35V - 3.3V$ ) threshold. Operating at input voltages below 9V may cause the module to shut down earlier due to OCP inception.

### Output Voltage Range

The 9-36V ProLynx™ modules will support the values of trim resistors indicated in Table 1 to generate the same output voltage, except with sign inversion. For an output voltage of 12V or higher the maximum input voltage will have to be proportionally reduced from 24Vin so that the sum of the magnitudes does not exceed 36V

### Overcurrent Protection

The 9-36V ProLynx modules will automatically scale current limit with output voltage through an inverse relationship of the current limit threshold even in negative output voltage mode. This feature is shown graphically in Fig. 47, allows higher output currents to be drawn from the module at lower output voltages thereby optimizing the power delivery capability of the module.

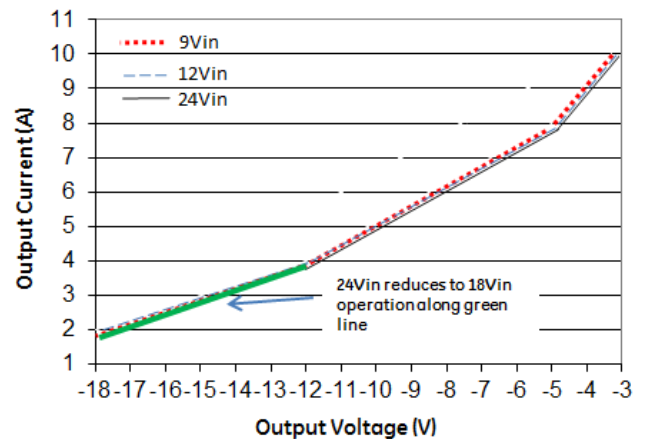


Figure 47. Graph showing maximum output current capability at different output voltages.

# 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules

9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current

9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 10A to 2A Scaled output current

## Efficiency

9-36V ProLynx modules in a negative output application

**-3.3Vout and at 25°C**

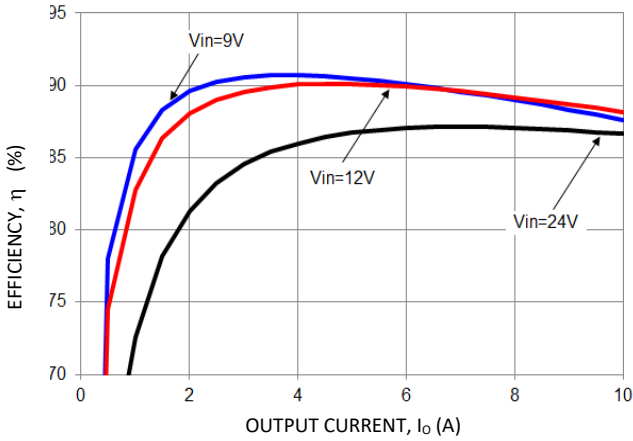


Figure 48. Converter Efficiency versus Output Current.

**-12Vout and at 25°C**

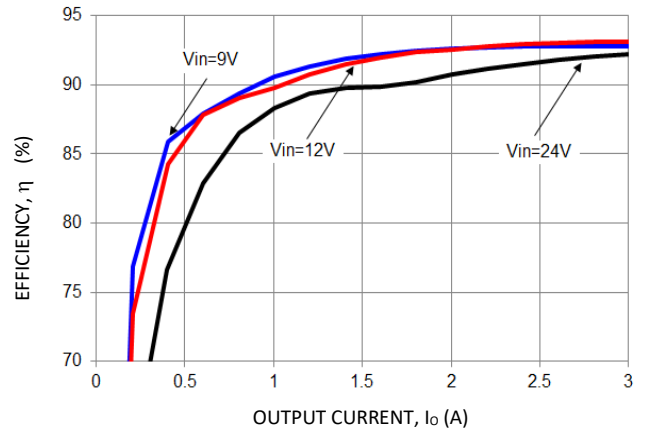


Figure 50. Converter Efficiency versus Output Current.

**-5Vout and at 25°C**

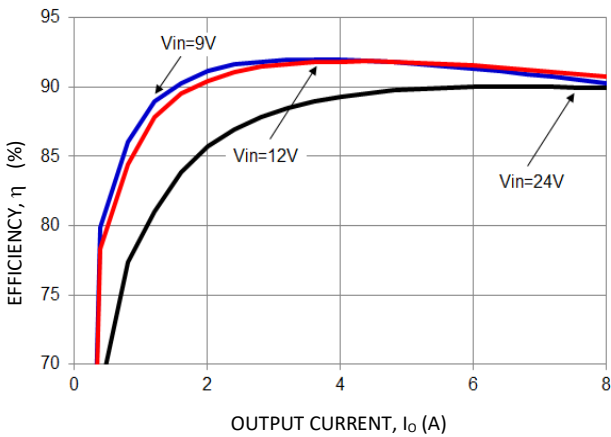


Figure 49. Converter Efficiency versus Output Current.

**-18Vout and at 25°C**

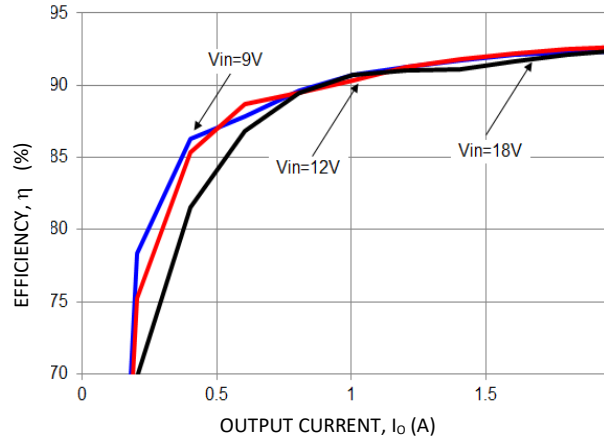


Figure 51. Converter Efficiency versus Output Current.

# 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules

9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current

9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 12A to 1.5A Scaled output current

## Thermal

Thermal Derating curves for some of the output voltage settings when the 9-36V ProLynx modules are connected in a negative output application. De-rating curves for -3.3Vout, -5Vout, -12Vout and -18Vout have been provided for input voltages of 9Vin, 12Vin and 24Vin. Intermediate voltages can be estimated through extrapolation of provided data

9Vin, -3.3Vout

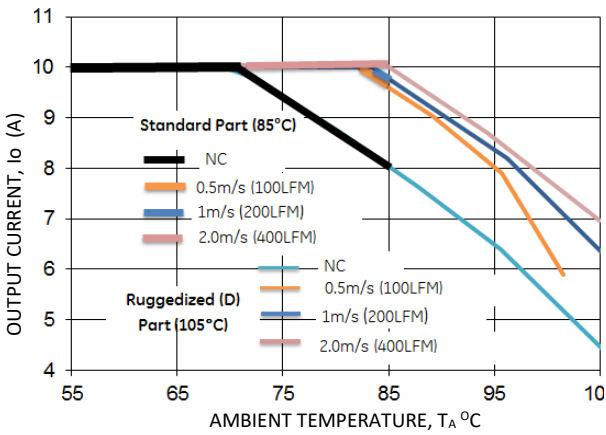


Figure 52. Derating Output Current versus Ambient Temperature and Airflow.

12Vin, -3.3Vout

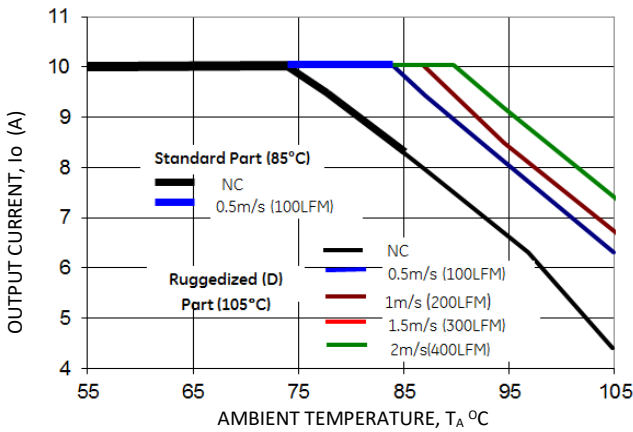


Figure 53. Derating Output Current versus Ambient Temperature and Airflow.

24Vin, -3.3Vout

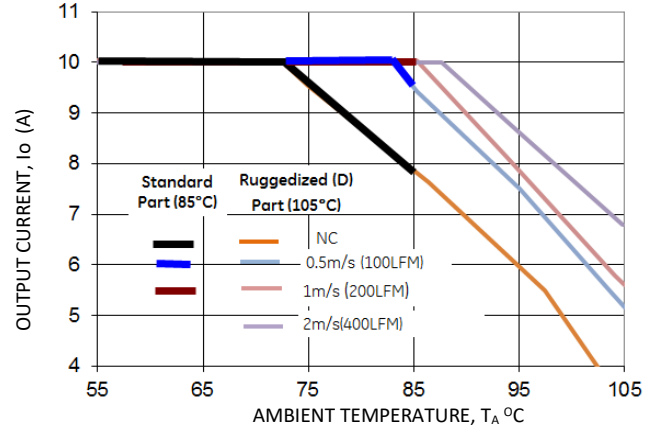


Figure 54. Derating Output Current versus Ambient Temperature and Airflow.

9Vin, -5Vout

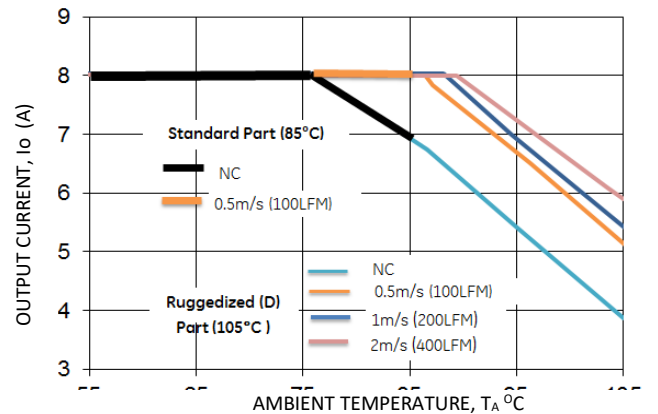


Figure 55. Derating Output Current versus Ambient Temperature and Airflow.

12Vin, -5Vout

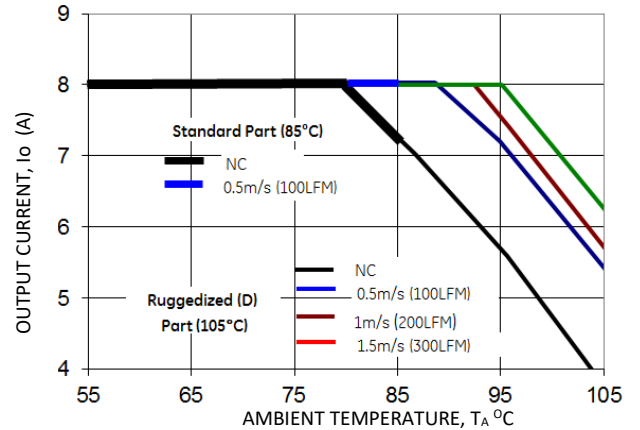


Figure 56. Derating Output Current versus Ambient Temperature and Airflow.

# 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules

9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current

9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 10A to 2A Scaled output current

24Vin, -5Vout

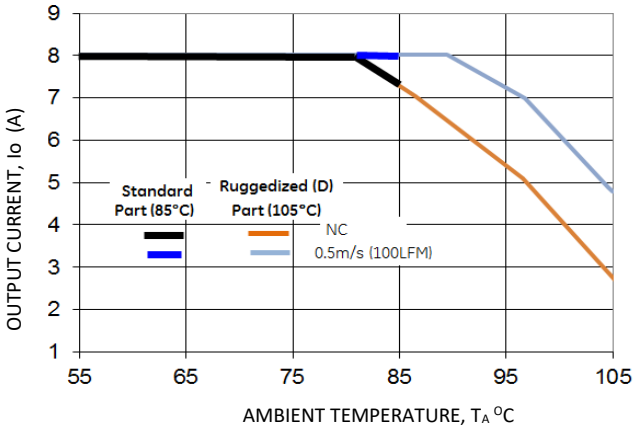


Figure 57. Derating Output Current versus Ambient Temperature and Airflow.

24Vin, -12Vout

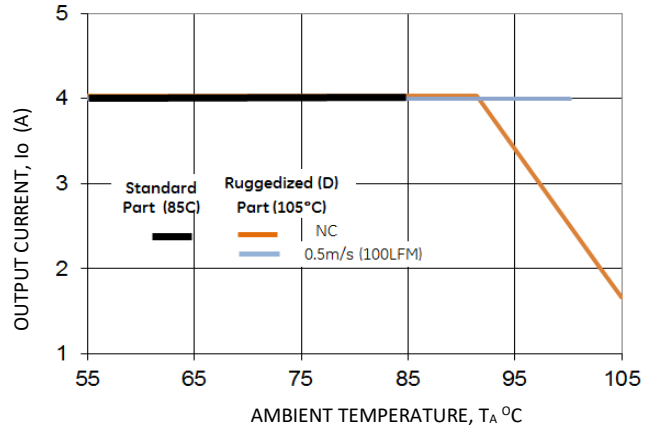


Figure 60. Derating Output Current versus Ambient Temperature and Airflow.

9Vin, -12Vout

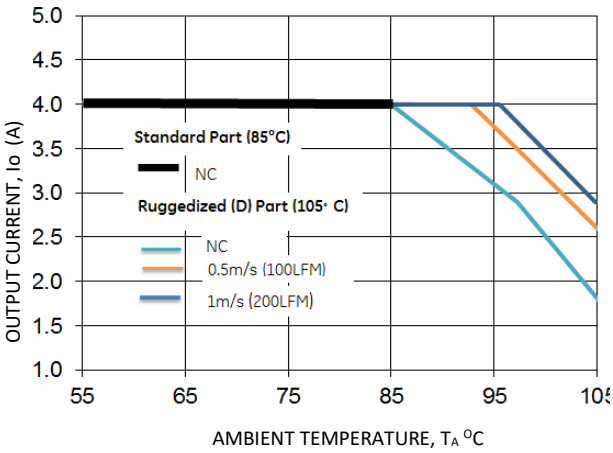


Figure 58. Derating Output Current versus Ambient Temperature and Airflow.

9Vin, -18Vout

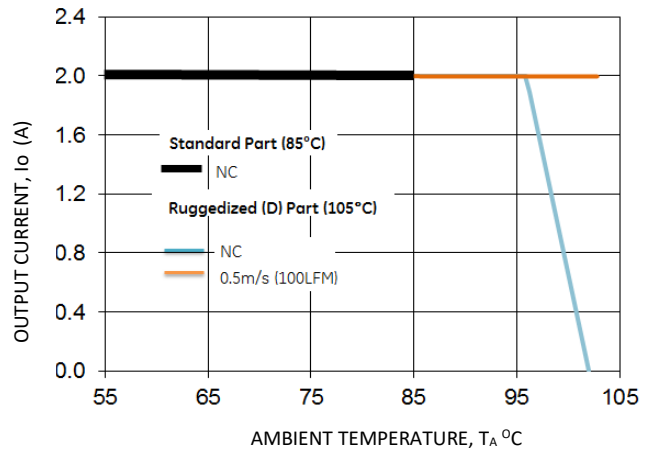


Figure 61. Derating Output Current versus Ambient Temperature and Airflow.

12Vin, -12Vout

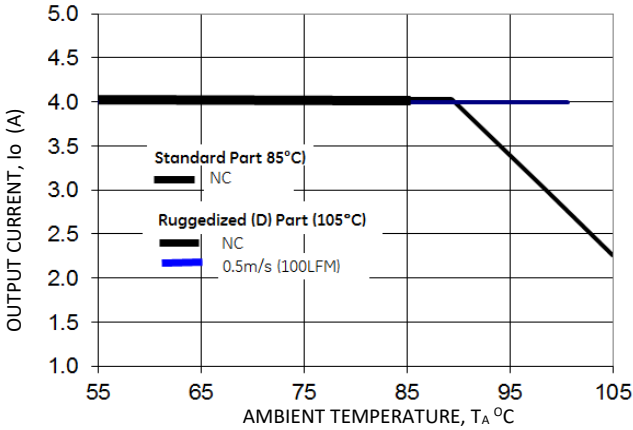


Figure 59. Derating Output Current versus Ambient Temperature and Airflow.

12Vin, -18Vout

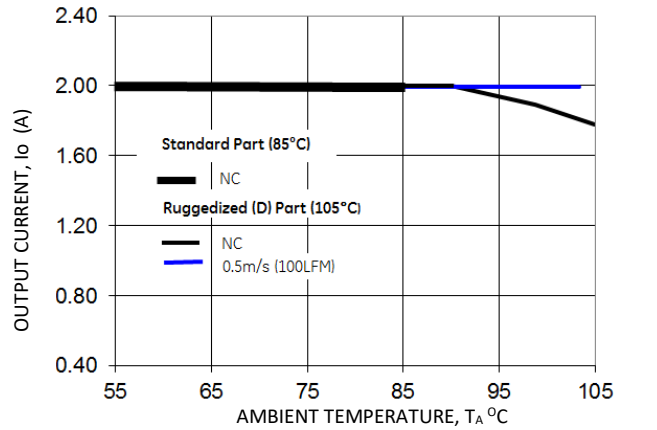


Figure 62. Derating Output Current versus Ambient Temperature and Airflow.

### 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules

9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current

9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 12A to 1.5A Scaled output current

18Vin, -18Vout

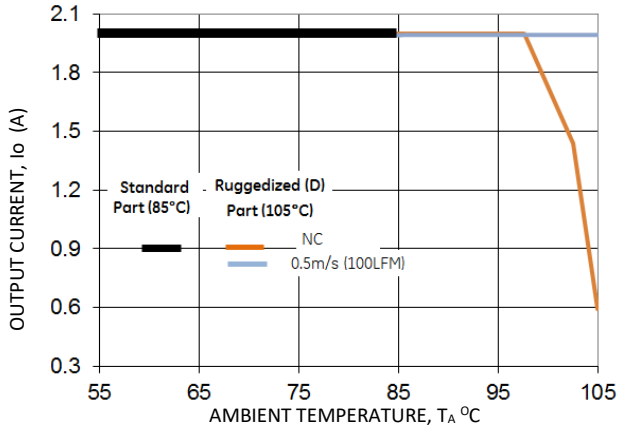


Figure 63. Derating Output Current versus Ambient Temperature and Airflow.

# 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules

9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current

9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 10A to 2A Scaled output current

## Input Ripple

Input ripple curves have been provided for input voltages of 9Vin, 12Vin and 18Vin/24Vin.

Ripple at intermediate input voltages can be estimated through extrapolation of provided curves

### 9Vin

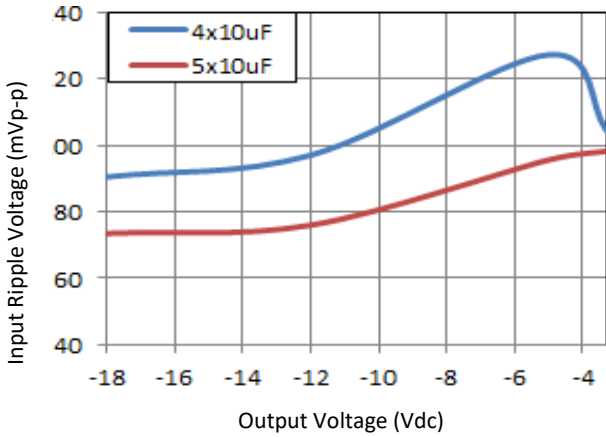


Figure 64. Input ripple voltage with 4x10  $\mu$ F or 5x10  $\mu$ F ceramic capacitors at the input (max load).

### 12Vin

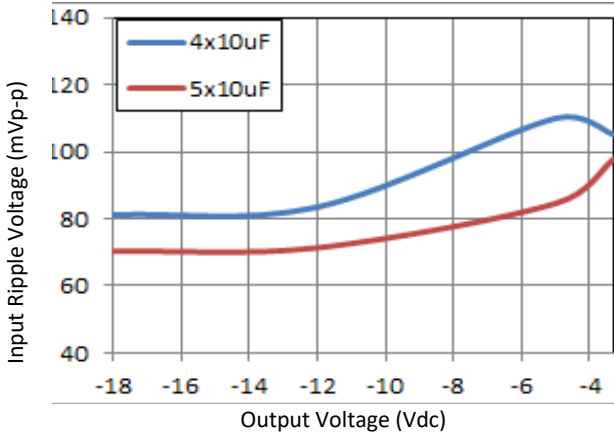


Figure 65. Input ripple voltage with 4x10  $\mu$ F or 5x10  $\mu$ F ceramic capacitors at the input (max load).

### 18Vin(-12Vo to -18Vo) / 24Vin(-3.3Vo to -12Vo)

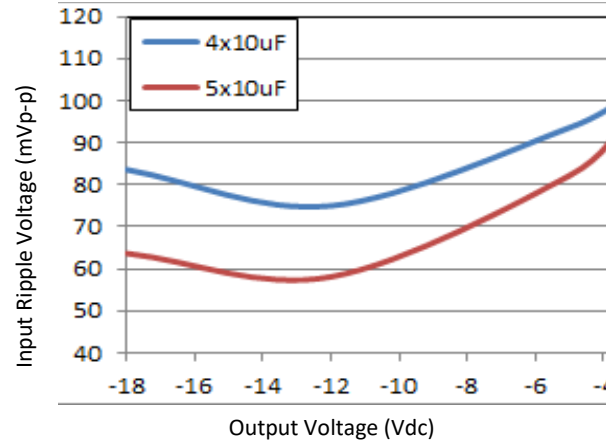


Figure 66. Input ripple voltage with 4x10  $\mu$ F or 5x10  $\mu$ F input ceramic capacitors (max load).

## 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules

9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current

9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 12A to 1.5A Scaled output current

### Output Ripple


Output ripple curves for input voltages of 9Vin, 12Vin and 24Vin

Ripple at intermediate input voltages can be estimated through extrapolation. Output Voltage is also roughly proportional to load current level.

**Table 7. Peak to Peak Ripple in mV with a 10uF external capacitor at different load levels**

| <b>-3.3Vout</b> |      |         |          |
|-----------------|------|---------|----------|
|                 | 0.1A | 50%Load | 100%Load |
| 9Vin            | 14   | 22      | 34       |
| 12Vin           | 16   | 21      | 26.5     |
| 24Vin           | 16.5 | 24      | 30       |
| <b>-5Vout</b>   |      |         |          |
|                 | 0.1A | 50%Load | 100%Load |
| 9Vin            | 17   | 24      | 32       |
| 12Vin           | 18   | 23      | 27       |
| 24Vin           | 20   | 25      | 27       |
| <b>-12Vout</b>  |      |         |          |
|                 | 0.1A | 50%Load | 100%Load |
| 9Vin            | 30   | 34.5    | 37       |
| 12Vin           | 34   | 35      | 37       |
| 24Vin           | 40.5 | 41      | 43       |
| <b>-18Vout</b>  |      |         |          |
|                 | 0.1A | 50%Load | 100%Load |
| 9Vin            | 41   | 47      | 51       |
| 12Vin           | 49   | 51.5    | 53       |
| 18Vin           | 59   | 57      | 61       |

9Vin

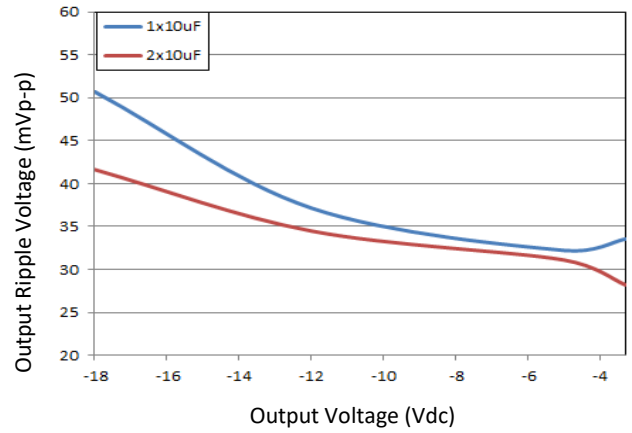

**Figure 67. Output ripple with 1x10µF or 2x10µF output ceramic capacitors (max load).**



### 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules

9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current

9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 10A to 2A Scaled output current

12Vin

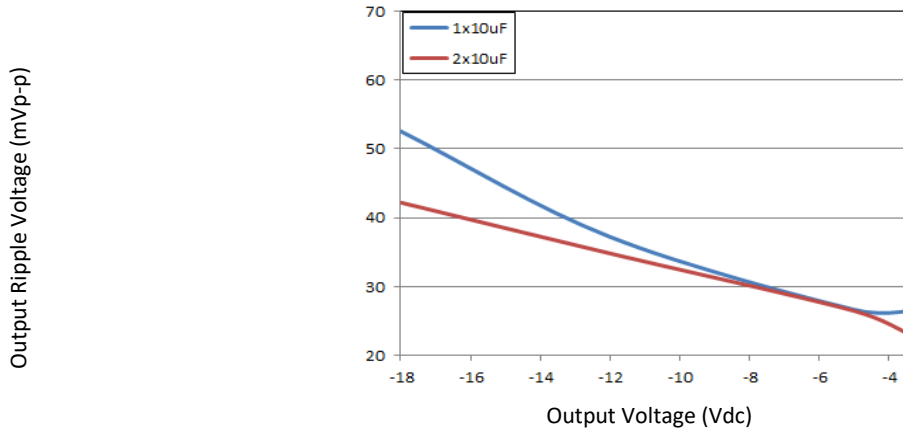


Figure 68. Output ripple with 1x10μF or 2x10μF output ceramic capacitors (max load).

18Vin(-12Vo to -18Vo) / 24Vin(-3.3Vo to -12Vo)

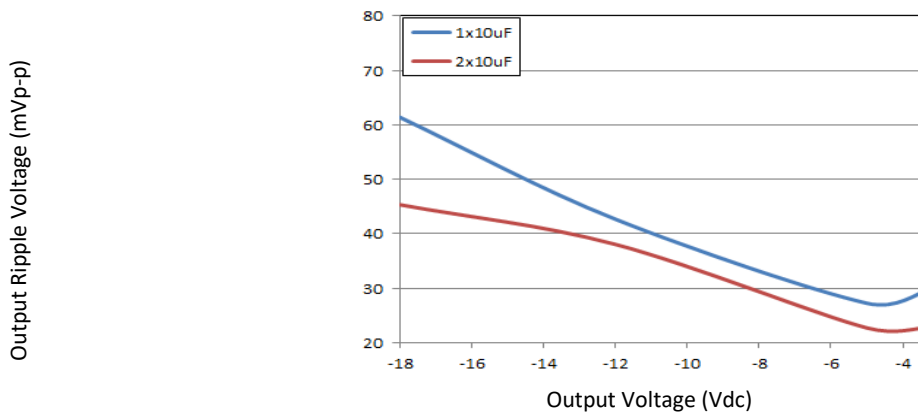


Figure 69. Output ripple with 1x10μF or 2x10μF output ceramic capacitors (max load).

## 9-36V ProLynx™ 12A: Non-Isolated DC-DC Power Modules

9Vdc –36Vdc input; 3Vdc to 18Vdc output; 12A to 6A Scaled output current

9Vdc –24Vdc input; -3.3Vdc to -18Vdc output; 12A to 1.5A Scaled output current

### Ordering Information

Please contact your GE Sales Representative for pricing, availability and optional features.

**Table 8. Device Codes**

| Device Code      | Input Voltage Range  | Output Voltage  | Output Current  | On/Off Logic | Connector Type | Comcodes  |
|------------------|--|---|---|--------------|----------------|-----------|
| APXW012A0X3-SRZ  | 9 – 36Vdc or<br>9 – 24Vdc in<br>negative output<br>application | 3 – 18Vdc or<br>-3.3 to -18Vdc in<br>negative output<br>application | 12A – 6A or<br>12A – 1.5A<br>in negative<br>output<br>application | Negative     | SMT            | 150028492 |
| APXW012A0X3-SRDZ |  |   |   | Negative     | SMT            | 150034987 |
| APXW012A0X43-SRZ |  |   |   | Positive     | SMT            | 150035002 |

-Z refers to RoHS compliant parts

**Table 9. Coding Scheme**

| TLynx family | Sequencing feature. | Input voltage range | Output current | Output voltage          | On/Off logic                        | Remote Sense | Options                              |  | ROHS Compliance |
|--------------|---------------------|---------------------|----------------|-------------------------|-------------------------------------|--------------|--------------------------------------|--|-----------------|
| AP           | X                   | W                   | 012            | X                       | 4                                   | 3            | -SR                                  | -D   | Z               |
|              | X = w/o Seq.        | W = 9-36V           | 12A            | X = programmable output | 4 = positive<br>No entry = negative | Available    | S = Surface Mount<br>R = Tape & Reel | D = 105°C operating ambient, 40G operating shock as per MIL Std 810G | Z = ROHS6       |

## Contact Us

For more information, call us at

USA/Canada:

**+1 888 546 3243**, or +1 972 244 9288

Asia-Pacific:

+86-21-53899666

Europe, Middle-East and Africa:

+49.89.878067-280

[Go.ABB/Industrial](#)



GE Critical Power reserves the right to make changes to the product(s) or information contained herein without notice, and no liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.