

# MAFL-011003



## MoCA Band Pass Filter 500 - 3000 MHz

Rev. V2


### Features

- Surface Mount
- 75 Ohm
- RoHS\* Compliant
- Pb Free
- MoCA Application

### Description

M/A-COM Technology Solutions' MAFL-011003 is a surface mount Band Pass Filter unit designed for MoCA applications.

### Functional Schematic

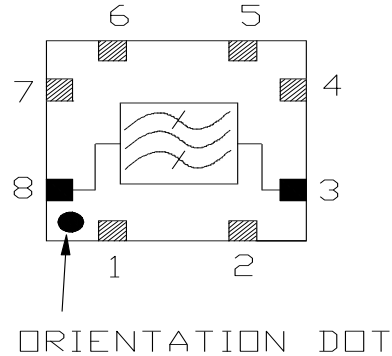

Electrical Specifications:  $Z_0 = 75\Omega$ ,  $T_A = 25^\circ\text{C}$ ,  $P_{in} = 0\text{dBm}$

Parameter	Units	Min	Typ	Max
<b>Common to MoCA / MoCA to Common Rejection</b>				
500 - 565 MHz	dB	-35	-37	-
565 - 575 MHz	dB	-28.5	-30	-
950 - 960 MHz	dB	-32	34	-
960 - 3000 MHz	dB	-37	40	-
<b>Insertion Loss</b>				
650 - 875 MHz	dB	-	-1.5	-3
<b>Common Port Return Loss</b>				
650 - 875 MHz	dB	-9.5	-10	-
<b>Output Return Loss</b>				
650 - 875 MHz	dB	-9.5	-10	-

Parameter	Units	Target Max
<b>Pass Band Flatness</b>		
Any 50MHz band from 675 - 850 MHz	dB	0.5 P-P
650-700 MHz	dB	1.5 P-P
825-875 MHz	dB	1.5 P-P

### Recommended Maximum Ratings

Parameter	Value
Storage Temperature	-40C to +85°C
Operating Temperature	-40C to +85°C
DC Current	30mA
RF Power	+23.9dBm (250mW)
Transient Voltage	200V

- Full temperature plots are available on request.

\* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC

### Pin Configuration


Function	Pin Number
Common Port (Input)	8
MoCA Port (Output)	3
Ground	1 - 2, 4 - 7
Not connected	-

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.  
**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400  
 • **India** Tel: +91.80.43537383 • **China** Tel: +86.21.2407.1588  
 Visit [www.macomtech.com](http://www.macomtech.com) for additional data sheets and product information.



M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

**Outline Drawing:**



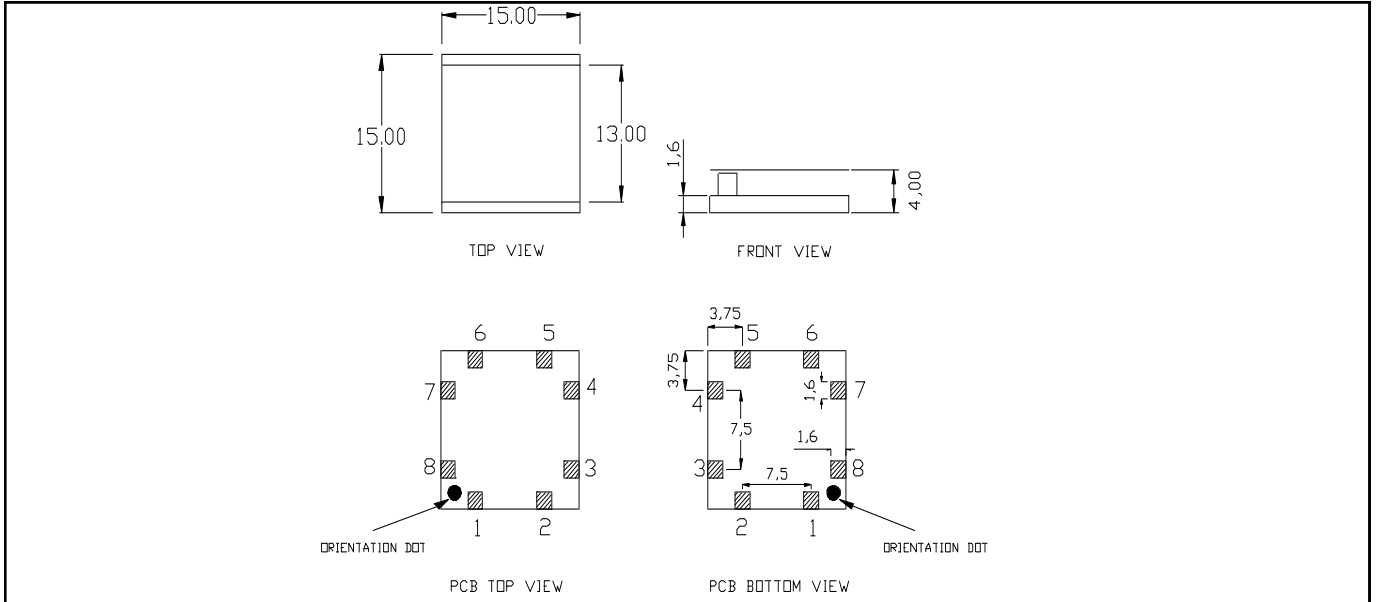


**Recommended PCB layout & Configuration**

- Track dimension = 1.1 mm
- Gap dimension = 1.2 mm
- It is not recommended to run tracks under the filter unless they are greater than 1.6 mm below the base.
- Ground should be 1.6 mm below the base of the filter
- Area directly under the filter should be free from copper
- RF shield should be kept a minimum of 6 mm above the filter

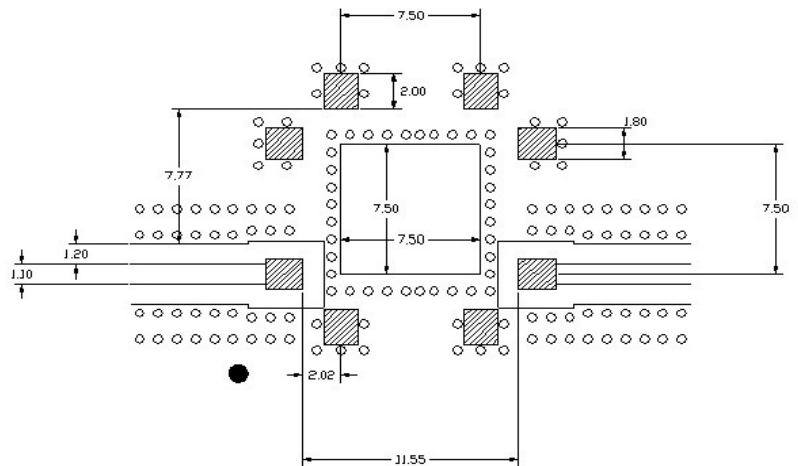

1. Dimensions in mm.
2. Tolerance:  $\pm 0.1$  mm unless otherwise noted.
3. Model number and lot code printed on reel.
4. Plating finish: ENIG on both sides, 0.05 to 0.1  $\mu$ m gold over 3 to 6  $\mu$ m nickel

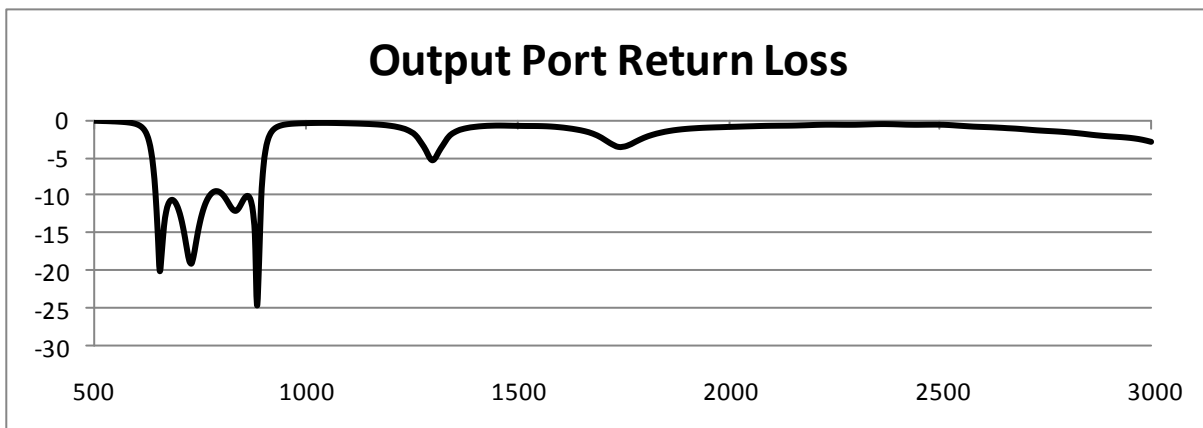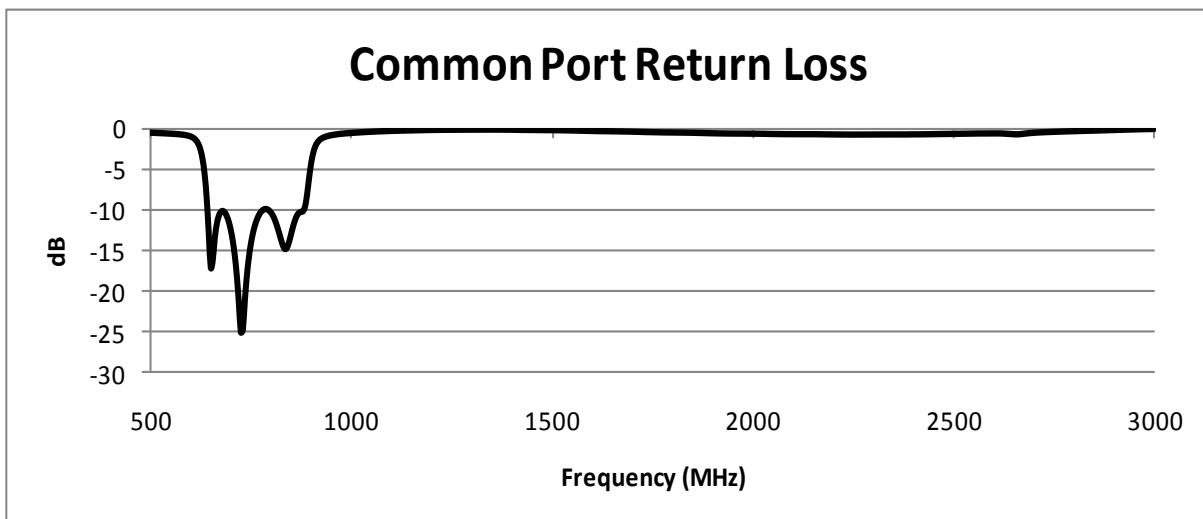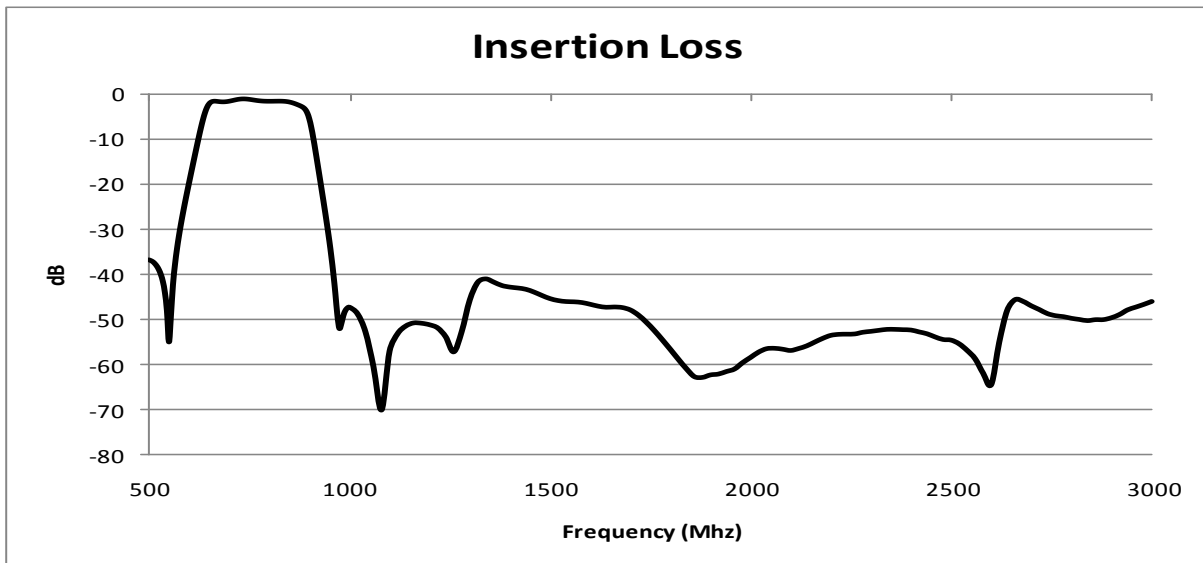

# MAFL-011003



**MoCA Band Pass Filter**  
500 - 3000 MHz


Rev. V2

## Tape & Reel Information

Parameter	Units	Value
Qty per reel	-	500
Reel size	mm	330

## Ordering Information

Part Number	Description
MAFL-011003	Tape & Reel
MAFL-011003-TB	Customer Evaluation Board

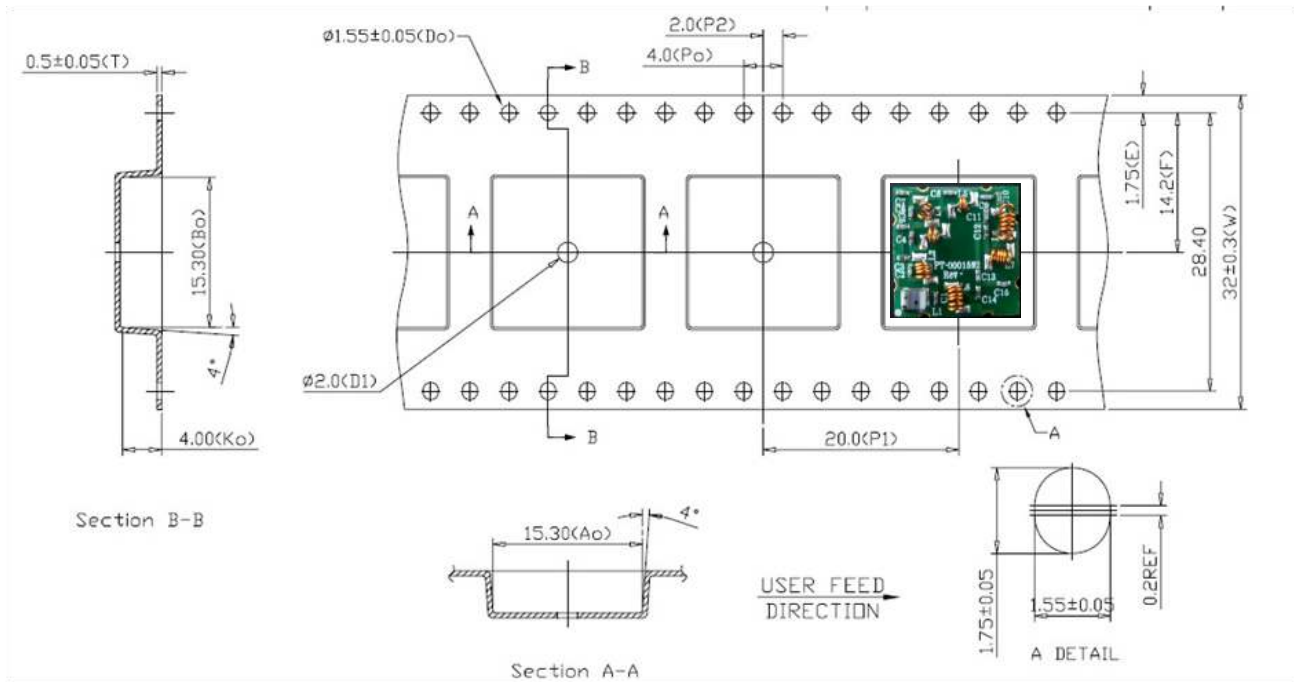

## Recommended Pick up location

The pickup location must be offset from the centre of the part by 1mm in 1 axis due to the location of the surface mount components.

