

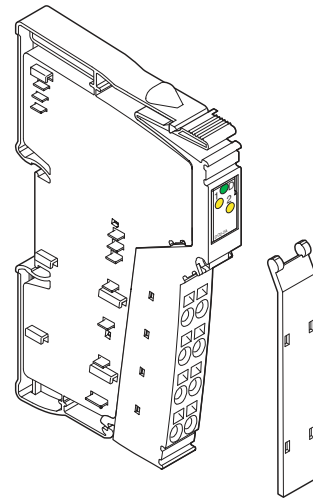
IB IL 24 DO 2-2A ...

Inline terminal with two digital outputs

AUTOMATION

Data sheet
5556_en_04

© PHOENIX CONTACT 2010-11-23



1 Description

This terminal is designed for use within an Inline station. It is used to output digital signals.

Features

- Connections for two digital actuators
- Connection of actuators in 2, 3, and 4-wire technology
- Nominal current of each output: 2 A
- Total current of the terminal: 4 A
- Short-circuit and overload protected outputs
- Diagnostic and status indicators
- Approved for the use in potentially explosive areas (observe the notes on page 8)
- Approved for use within a safety-related segment circuit (observe the notes on page 7)



This data sheet is only valid in association with the IL SYS INST UM E user manual.



Make sure you always use the latest documentation.
It can be downloaded at www.phoenixcontact.net/catalog.



This data sheet is valid for all products listed on the following page:

2 Ordering data

Products

| Description | Type | Order No. | Pcs./Pkt. |
|---|---------------------------|-----------|-----------|
| Terminal with two digital outputs; complete with accessories (connector and labeling field); transmission speed of 500 kbps | IB IL 24 DO 2-2A-PAC | 2861263 | 1 |
| Terminal with two digital outputs; without accessories; transmission speed of 500 kbps | IB IL 24 DO 2-2A | 2726243 | 1 |
| Terminal with two digital outputs; complete with accessories (connector and labeling field); transmission speed of 2 Mbps | IB IL 24 DO 2-2A-2MBD-PAC | 2861700 | 1 |
| Terminal with two digital outputs; without accessories; transmission speed of 2 Mbps | IB IL 24 DO 2-2A-2MBD | 2819053 | 1 |



One of the listed connectors is needed for the complete fitting of the IB IL 24 DO 2-2A and IB IL 24 DO 2-2A-2MBD terminals.

Accessories

| Description | Type | Order No. | Pcs./Pkt. |
|--|----------------|-----------|-----------|
| Connector with eight spring-cage connections (green, w/o color print) | IB IL SCN-8 | 2726337 | 10 |
| Connector with eight spring-cage connections (green, with color print) | IB IL SCN-8-CP | 2727608 | 10 |

Documentation

| Description | Type | Order No. | Pcs./Pkt. |
|---|-----------------------|-----------|-----------|
| "Configuring and installing the INTERBUS Inline product range" user manual | IB IL SYS PRO UM E | 2743048 | 1 |
| "Automation terminals of the Inline product range" user manual | IL SYS INST UM E | 2698737 | 1 |
| "INTERBUS addressing" data sheet | DB GB IBS SYS ADDRESS | - | - |
| "Inline terminals for use in zone 2 potentially explosive areas" application note | AH EN IL EX ZONE 2 | - | - |
| "Safety-related segment circuit" application note | AH EN IL SAFE | - | - |

3 Technical data

General data

| | |
|--|--|
| Housing dimensions (width x height x depth) | 12.2 mm x 119.8 mm x 71.5 mm |
| Weight | 46 g (without connector), 61 g (with connector) |
| Operating mode | Process data mode with 2 bits |
| Connection method for actuators | 2, 3, and 4-wire technology |
| Permissible temperature (operation) | -25°C to +55°C |
| Permissible temperature (storage/transport) | -25°C to +85°C |
| Permissible humidity (operation/storage/transport) | 10% to 95% according to DIN EN 61131-2 |
| Permissible air pressure (operation/storage/transport) | 70 kPa to 106 kPa (up to 3000 m above sea level) |
| Degree of protection | IP20 according to IEC 60529 |
| Protection class | Class 3, according to EN 61131-2, IEC 61131-2 |
| Connection data for connectors | |
| Connection method | Spring-cage terminals |
| Conductor cross-section | 0.08 mm ² to 1.5 mm ² (solid or stranded), 28 - 16 AWG |

Interface

| | |
|-----------|------------------|
| Local bus | Via data routing |
|-----------|------------------|

Transmission speed

| | |
|--|----------|
| IB IL 24 DO 2-2A-PAC, IB IL 24 DO 2-2A | 500 kbps |
| IB IL 24 DO 2-2A-2MBD-PAC, IB IL 24 DO 2-2A-2MBD | 2 Mbps |

Supply of the module electronics and I/O through the bus terminal/power terminal

| | |
|-------------------|-----------------------|
| Connection method | Via potential routing |
|-------------------|-----------------------|

Power consumption

| | 500 kbps | 2 Mbps |
|--|-------------------------|-------------------------|
| Communications power | 7.5 V | 7.5 V |
| Current consumption from the local bus | 35 mA, maximum | 60 mA, maximum |
| Power consumption from the local bus | 0.27 W, maximum | 0.45 W, maximum |
| Segment supply voltage U_S | 24 V DC (nominal value) | 24 V DC (nominal value) |
| Nominal current consumption at U_S | 4 A (2 x 2 A), maximum | 4 A (2 x 2 A), maximum |

Digital outputs

| | |
|---------------------------------------|---|
| Number | 2 |
| Nominal output voltage U_{OUT} | 24 V DC |
| Differential voltage for I_{nom} | ≤ 1 V |
| Nominal current I_{nom} per channel | 2 A |
| Tolerance of the nominal current | +10% |
| Total current | 4 A |
| Protection | Short circuit; overload |
| Nominal load | |
| Ohmic | 12 Ω /48 W |
| Lamp | 48 W |
| Inductive | 48 VA (1.2 H, 12 Ω) |
| Signal delay upon power up of: | |
| Nominal ohmic load | 200 μ s, approximately |
| Nominal lamp load | 200 ms, typical (with switching frequencies up to 8 Hz; above this frequency the lamp load responds like an ohmic load) |
| Nominal inductive load | 250 ms (1.2 H, 12 Ω), approximately |
| Signal delay upon power down of: | |
| Nominal ohmic load | 200 μ s, approximately |
| Nominal lamp load | 200 μ s, approximately |
| Nominal inductive load | 250 ms (1.2 H, 12 Ω), approximately |
| Switching frequency with: | |
| Nominal ohmic load | 300 Hz, maximum |



This switching frequency is limited by the selected data rate, the number of bus devices, the bus structure, the software and the control or computer system used.

| | |
|-------------------|-----------------|
| Nominal lamp load | 300 Hz, maximum |
|-------------------|-----------------|



This switching frequency is limited by the selected data rate, the number of bus devices, the bus structure, the software and the control or computer system used.

| | |
|---|--|
| Nominal inductive load | 0.5 Hz (1.2 H, 12 Ω) maximum |
| Overload response | Auto restart |
| Response with inductive overload | Output may be damaged |
| Reverse voltage protection against short pulses | Protected against reverse voltages |
| Resistance to permanently applied reverse voltages | Up to 2 A DC |
| Validity of output data after connecting the 24 V voltage supply (power up) | 5 ms, typical |
| Response upon power down | The output follows the supply voltage without delay. |

| Digital outputs (continued) | |
|---|---------------------------------|
| Limitation of the voltage induced on circuit interruption | -0.7 V, approximately |
| Maximum inductive breaking energy/channel | 1500 W (8/20 μs pulse) |
| Protective circuit type | Free-wheeling diode per channel |

| Output characteristic curve when switched on (typical) | | |
|--|---------------------------------|--------|
| Output current (A) | Differential output voltage (V) | |
| | 500 kbps | 2 Mbps |
| 0 | 0 | 0 |
| 0.2 | 0.02 | 0.013 |
| 0.4 | 0.04 | 0.026 |
| 0.6 | 0.06 | 0.039 |
| 0.8 | 0.08 | 0.053 |
| 1.0 | 0.10 | 0.066 |
| 1.2 | 0.12 | 0.079 |
| 1.4 | 0.14 | 0.093 |
| 1.6 | 0.16 | 0.107 |
| 1.8 | 0.18 | 0.122 |
| 2.0 | 0.20 | 0.136 |
| 2.2 | 0.22 | |

Power dissipation

Formula to calculate the power dissipation of the electronics

| 500 kbps | 2 Mbps |
|--|---|
| $P_{EL} = 0.18 \text{ W} + \sum_{n=1}^2 (200 \text{ mW} + I_{Ln}^2 \times 0.1 \Omega)$ | $P_{EL} = 0.40 \text{ W} + \sum_{n=1}^2 (35 \text{ mW} + I_{Ln}^2 \times 0.075 \Omega)$ |

Where:
 P_{EL} Total power dissipation in the terminal
 n Index of the number of set outputs $n = 1$ to 2
 I_{Ln} load current of output n

Power dissipation of the housing depending on the ambient temperature

| 500 kbps | 2 Mbps |
|---|--|
| $P_{HOU} = 2.4 \text{ W}$ | 0.6 W (within the permissible operating temperature) |
| $P_{HOU} = 2.4 \text{ W} - \frac{T_A - (-5^\circ\text{C})}{37.5 \text{ K/W}}$ | |
| | $-25^\circ\text{C} < T_A \leq -5^\circ\text{C}$ |
| | $-5^\circ\text{C} < T_A \leq +55^\circ\text{C}$ |

Where:
 P_{HOU} Permissible power dissipation of the housing
 T_A Ambient temperature

Limitation of simultaneity, derating (500 kbps)

| Ambient temperature (TA) | Maximum load current at 100% simultaneity | Maximum load current at 50% simultaneity |
|--------------------------|---|--|
| 55°C | 1 A | 2 A |
| 40°C | 2 A | 2 A |

With an ambient operating temperature of 55°C and 100% simultaneity, a load current of 1 A per channel is permissible. If only one channel is used (50% simultaneity), a load current of 2 A can be tapped. With an ambient temperature of 40°C, a maximum load current of 2.0 A can be tapped in both cases.

If both channels are used, the permissible working point must be defined according to the above formulas. For an example, please refer to the IB IL SYS PRO UM E user manual or the Inline system manual for your bus system.

Limitation of simultaneity, derating (2 Mbps)

| Ambient temperature (TA) | Maximum load current at 100% simultaneity | Maximum load current at 50% simultaneity |
|--------------------------|---|--|
| 55°C | 0.7 A | 1.2 A |
| 35°C | 2 A | 2 A |

With an ambient operating temperature of 55°C and 100% simultaneity, a load current of 0.7 A per channel is permissible. If only one channel is used (50% simultaneity), a load current of 1.2 A can be tapped. With an ambient temperature of 35°C, a maximum load current of 2 A can be tapped in both cases.

If both channels are used, the permissible working point must be defined according to the above formulas. For an example, please refer to the IB IL SYS PRO UM E user manual or the Inline system manual for your bus system.

Protective equipment

| | |
|---|---|
| Overload/short circuit in the segment circuit | Electronic |
| Surge voltage | Protective elements of the power terminal |
| Polarity reversal | Protective elements of the power terminal |

Electrical isolation/isolation of the voltage areas

To provide electrical isolation between the logic level and the I/O area it is necessary to supply the station bus coupler and the digital output terminal described here via the bus coupler or a power terminal from separate power supply units. Interconnection of the power supply units in the 24 V area is not permitted. (See also user manual.)

Common potentials

The 24 V main voltage, 24 V segment voltage, and GND have the same potential. FE is a separate potential area.

Separate potentials in the system consisting of bus terminal/power terminal and I/O terminal

| Test distance | Test voltage |
|---|-------------------------|
| 5 V supply incoming remote bus/7.5 V supply (bus logic) | 500 V AC, 50 Hz, 1 min. |
| 5 V supply outgoing remote bus/7.5 V supply (bus logic) | 500 V AC, 50 Hz, 1 min. |
| 7.5 V supply (bus logic) / 24 V supply (I/O) | 500 V AC, 50 Hz, 1 min. |
| 24 V supply (I/O) / functional earth ground | 500 V AC, 50 Hz, 1 min. |

Error messages to the higher-level control or computer system

| | |
|-------------------------------------|-----|
| Short circuit/overload of an output | Yes |
|-------------------------------------|-----|



An error message is generated when an output is shorted and switched on. In addition, the diagnostic LED (D) flashes on the terminal at 2Hz (medium) under these conditions.

| | |
|--------------------------------|----|
| Operating voltage out of range | No |
|--------------------------------|----|

Approvals

For the latest approvals, please visit www.phoenixcontact.net/catalog.

4 Internal basic circuit diagram

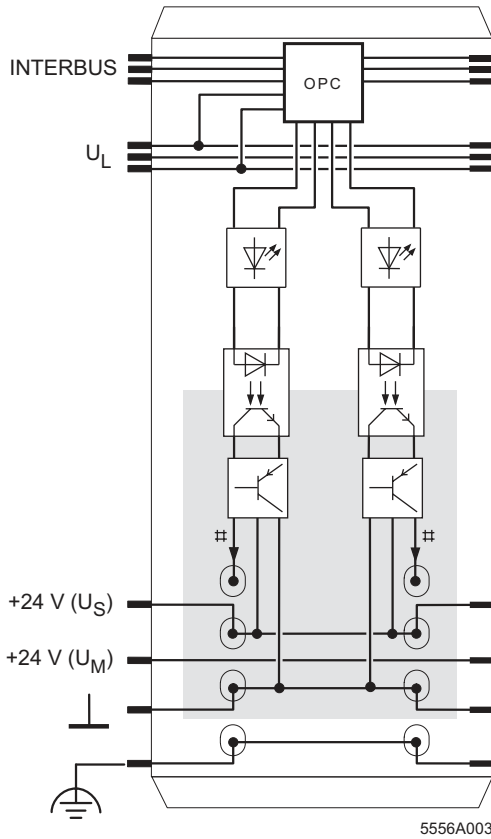









Figure 1 Internal wiring of the terminal points

Key:

-  Protocol chip (bus logic including voltage conditioning)
-  LED
-  Optocoupler
-  Transistor
-  Digital output
-  Electrically isolated area

 Other symbols used are explained in the IL SYS INST UM E user manual.

5 Local diagnostic and status indicators and terminal point assignment

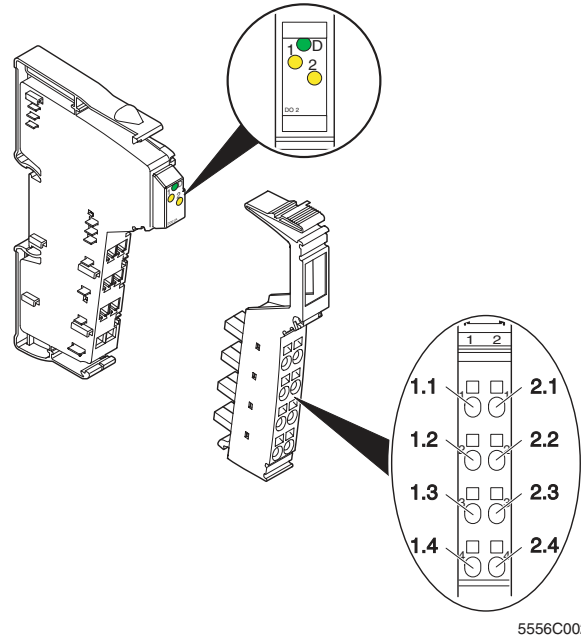


Figure 2 IB IL 24 DO 2-2A with appropriate connector

5.1 Local diagnostic and status indicators

| Des. | Color | Meaning |
|------|--------|-----------------------------------|
| D | Green | Diagnostics |
| 1, 2 | Yellow | Status indicators for the outputs |

5.2 Function identification

Pink

2 MBD: White stripe in the vicinity of the D LED

5.3 Terminal point assignment

| Terminal points | Assignment |
|-----------------|--|
| 1.1, 2.1 | Signal output (OUT) |
| 1.2, 2.2 | Segment voltage U_S for 4-wire termination Measuring point for the supply voltage |
| 1.3, 2.3 | Ground contact (GND) for 2, 3, and 4-wire termination |
| 1.4, 2.4 | FE connection for 3 and 4-wire termination |

6 Connection example



When connecting the actuators observe the assignment of the terminal points to the process data, see page 9.

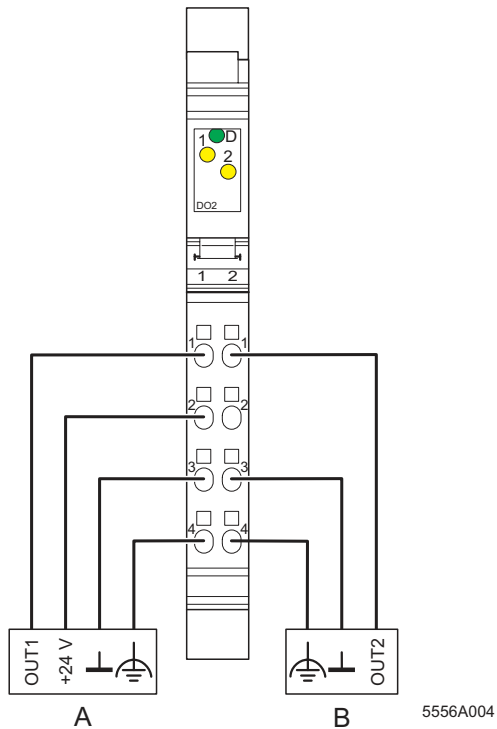


Figure 3 Typical connection of actuators

- A 4-wire termination
- B 3-wire termination

7 Notes on using the terminals within a safety-related segment circuit

The terminals of the following hardware version and later (listed in the table below) are approved for use within a safety-related segment circuit.

| Order No. | Order designation | Hardware version |
|-----------|---------------------------|------------------|
| 2861263 | IB IL 24 DO 2-2A-PAC | 06 |
| 2726243 | IB IL 24 DO 2-2A | 05 |
| 2861700 | IB IL 24 DO 2-2A-2MBD-PAC | 03 |
| 2819053 | IB IL 24 DO 2-2A-2MBD | 03 |



The hardware version is marked on the side of the housing of every terminal (1 in Figure 4).

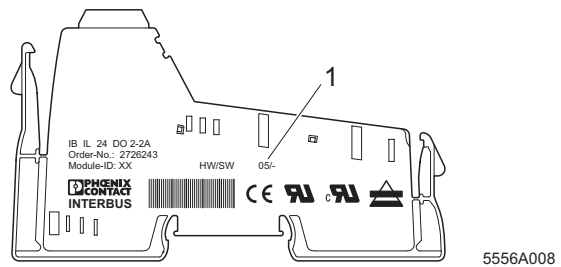


Figure 4 Labeling on an Inline terminal



The instructions in the current documentation for the safety terminal used and from the AH EN IL SAFE application note must be observed to ensure that operation of the safety-related segment circuit is not adversely affected. The latest documentation can be downloaded at www.phoenixcontact.net/catalog.


8 Notes on using the terminal in potentially explosive areas



WARNING: Explosion hazard

Please make sure that the following notes and instructions are observed.

Approval according to EC directive 94/9/EC

 **II 3G Ex nAC IIC T4 X**

Installation notes

1. This Inline terminal can be installed in zone 2.
2. The Inline terminal must only be installed, operated, and maintained by qualified personnel.
3. Please follow the installation instructions given in the IL SYS INST UM E user manual and the package slip.
4. When installing and operating the device, the applicable safety directives (including national safety directives), accident prevention regulations, as well as general technical regulations must be observed.
5. Please refer to the corresponding documentation (user manual, data sheet, package slip) and the certificates (EC type examination certificate and other approvals, if applicable) for safety-related data.
6. It is not permitted to access the circuits inside the Inline terminal. Do not repair the Inline terminal by yourself but replace it with a terminal of the same type. Repairs may only be carried out by the manufacturer.
7. The IP20 degree of protection (EN 60529) of the device is intended for a clean and dry environment.
8. Do not subject the Inline terminal to mechanical strain and/or thermal loads, which exceed the limits specified in the product documentation.
9. The Inline terminal has not been designed for use in potentially dust-explosive atmospheres.

Installation in zone 2

1. Observe the specified conditions for use in potentially explosive areas.
2. When installing the terminal, use an appropriate and approved housing with a minimum protection of IP54. Please observe the EN 60079-14 requirements, e.g., a steel housing with a wall thickness of 3 mm.
3. In potentially explosive areas, only snap the Inline terminal onto the rail and connect the cables when the power is switched off.
4. In zone 2, only connect devices to the supply and signal circuits that are suitable for operation in potentially explosive areas of zone 2 and the conditions at the installation location.

Restrictions/limit values

1. Only Inline terminals that are approved for use in potentially explosive areas may be snapped next to this Inline terminal.
Before using the Inline terminal in a zone 2 potentially explosive atmosphere, check whether it has been approved for installation within this area.
For a list of terminals approved for zone 2 potentially explosive areas, please refer to the AH EN IL EX ZONE 2 application note.
2. Please make sure that the maximum permissible current of 4 A flowing through potential jumpers U_M und U_S (total current) is not exceeded when using the Inline terminals in potentially explosive areas.
3. The maximum permissible current for each tension spring contact is 2 A.

9 Programming data/ configuration data

9.1 Local bus (INTERBUS)

| | |
|-------------------------|---|
| ID code | BD _{hex} (189 _{dec}) |
| Length code | C2 _{hex} |
| Process data channel | 2 bits |
| Input address area | 0 bits |
| Output address area | 2 bits |
| Parameter channel (PCP) | 0 bits |
| Register length (bus) | 2 bits |

9.2 Other bus systems



For the programming data/configuration data of other bus systems, please refer to the corresponding electronic device data sheet (GSD, EDS).

10 Process data

10.1 Assignment of the output process data

| (Byte.bit) view | | 0.1 | 0.0 |
|------------------|--------------------------------|------------|------------|
| Module | Terminal point (signal) | 2.1 | 1.1 |
| | Terminal point (+24 V) | 2.2 | 1.2 |
| | Terminal point (GND) | 2.3 | 1.3 |
| | Terminal point (FE) | 2.4 | 1.4 |
| Status indicator | LED | 2 | 1 |



For the assignment of the illustrated (byte.bit) view to your **INTERBUS** control or computer system, please refer to the DB GB IBS SYS ADDRESS data sheet.