

SURFACE MOUNT

# RF Transformer

## ADT16-6+

Mini-Circuits

50Ω

0.25 to 105 MHz

### FEATURES

- Excellent amplitude unbalance, 0.1 dB typ. and phase unbalance, 3 deg. typ. in 1 dB bandwidth
- Aqueous washable
- Protected under US patent 6,133,525



Generic photo used for illustration purposes only

CASE STYLE: CD636

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

### APPLICATIONS

- Impedance matching
- Balanced amplifier

### ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Units
Impedance Ratio (Secondary/Primary)			16		
Frequency Range		0.25		105	MHz
Insertion Loss*	0.25-105	—	3	—	dB
	0.45-75	—	2	—	
	1-40	—	1	—	
Amplitude Unbalance	1-40	—	0.1	—	dB
	0.45-75	—	0.2	—	
Phase Unbalance	1-40	—	2	—	Degree
	0.45-75	—	5	—	


\* Insertion Loss is referenced to mid-band loss, 0.5 dB typ.

### MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-20°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.5W
DC Current	30mA

Permanent damage may occur if any of these limits are exceeded.

### CONFIGURATION C

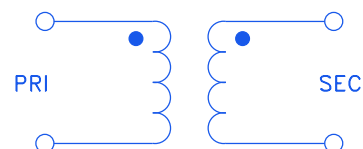



**SURFACE MOUNT**

# RF Transformer

# ADT16-6+

Mini-Circuits

50Ω

0.25 to 105 MHz


### PIN CONNECTIONS

PRIMARY DOT	3
PRIMARY	1
SECONDARY DOT	4
SECONDARY	6
NOT USED	2,5


**PRODUCT MARKING:** N/A

**DEMOBOARD MCL P/N:** TB-430

### OUTLINE DRAWING

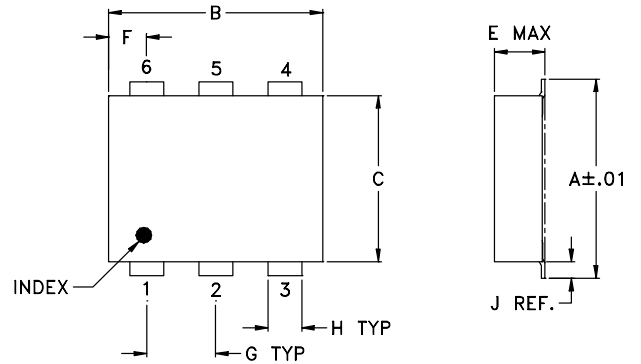

### PBC Land Pattern

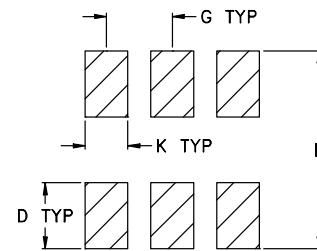

Suggested Layout.  
Tolerance to be within ±.002

### OUTLINE DIMENSIONS (Inches/mm)

A	B	C	D	E	F	G
.272	.310	.220	.100	.162	.055	.100
6.91	7.87	5.59	2.54	4.11	1.40	2.54
H	J	K	L			wt
.030	.026	.065	.300			grams
0.76	0.66	1.65	7.62			0.25

**TAPE & REEL INFORMATION:** F34



SURFACE MOUNT

# RF Transformer

## ADT16-6+

Mini-Circuits


50Ω

0.25 to 105 MHz


### TYPICAL PERFORMANCE DATA

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	Amplitude Unbalance (dB)	Phase Unbalance (deg)
0.17	1.13	12.27	0.01	0.03
0.26	1.01	14.51	0.01	0.03
0.50	0.92	16.52	0.01	0.06
1.60	0.64	19.73	0.01	0.18
20.00	0.50	18.79	0.02	2.32
50.00	0.77	12.36	0.12	4.94
55.00	0.83	11.64	0.13	5.27
65.00	0.96	10.38	0.15	5.75
75.00	1.11	9.32	0.15	6.13
106.00	1.67	6.87	0.01	6.64

ADT16-6+  
INSERTION LOSS

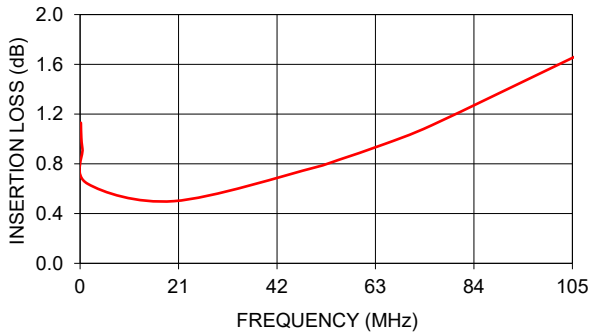

ADT16-6+  
INPUT RETURN LOSS

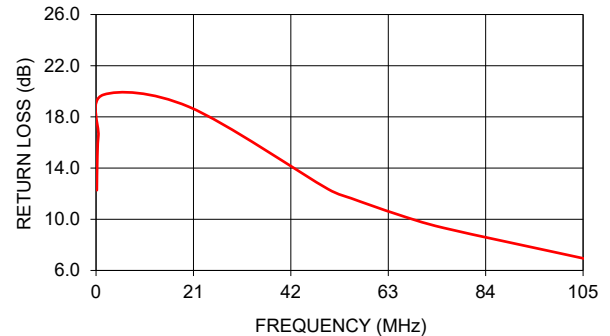

- NOTES**
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
  - B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
  - C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)

