



SAW filters for infrastructure systems

Series/Type: B3605

The following products presented in this data sheet are being withdrawn.

Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments
B39700B3605Z510	B39700B5018Z510	2011-04-01	2011-06-30	2011-09-30

For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of our worldwide sales network are presented at www.epcos.com/sales.

© EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.


SAW Components
B3605
Low-Loss Filter
70,00 MHz
Data Sheet

 Ceramic package **QCC12**
Features

- High performance IF bandpass filter
- Constant group delay
- Hermetically sealed ceramic package
- Filter surface passivated

Terminals


- Gold plated

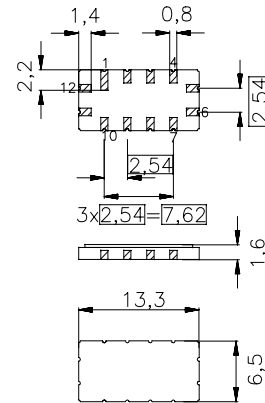

Dimensions in mm, approx. weight 0,4 g

Pin configuration

11	Input
1	Input - ground
5	Output
7	Output - ground
2, 3, 8, 9	Case - ground
4, 6, 10, 12	Ground

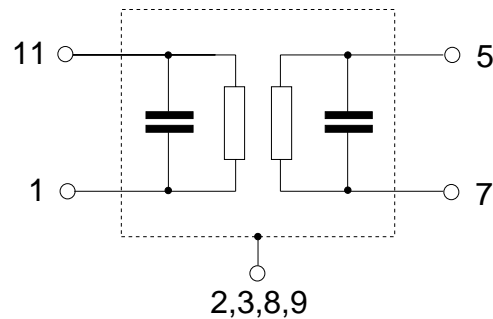

Type	Ordering code	Marking and Package according to	Packing according to
B3605	B39700-B3605-Z510	C61157-A7-A55	F61074-V8163-Z000

Electrostatic Sensitive Device (ESD)
Maximum ratings

Operable temperature range	T	- 40/+ 85	°C	source impedance 50 Ω
Storage temperature range	T_{stg}	- 40/+ 85	°C	
DC voltage	V_{DC}	0	V	
Source power	P_s	10	dBm	

SAW Components
B3605
Low-Loss Filter
70,00 MHz
Data Sheet
Characteristics

Operating temperature:	$T = -40\text{ }^{\circ}\text{C} \dots 85\text{ }^{\circ}\text{C}$
Terminating source impedance:	$Z_S = 50\ \Omega$ and matching circuit(Unbalanced)
Terminating load impedance:	$Z_L = 50\ \Omega$ and matching circuit(Unbalanced)
Group delay aperture	80 kHz

		min.	typ.	max.	
Center frequency (Center between 6dB points)	f_C	69,50	70,00	70,50	MHz
Insertion attenuation at f_C	α_C	—	9,6	10,8	dB
Amplitude ripple (p-p) 67,00 ... 73,00 MHz	$\Delta\alpha$	—	0,6	1,0	dB
Phase ripple (p-p) 65,50 ... 74,50 MHz	$\Delta\phi$	—	15,0	18,0	$^{\circ}$
Pass bandwidth					
$\alpha_{rel} \leq 1\text{ dB}$	B_{1dB}	8,1	8,3	—	MHz
$\alpha_{rel} \leq 3\text{ dB}$	B_{3dB}	9,1	9,3	—	MHz
$\alpha_{rel} \leq 30\text{ dB}$	B_{30dB}	—	12,8	13,2	MHz
Relative attenuation (relative to α_C)	α_{rel}				
50,00 ... 62,50 MHz		43	47	—	dB
62,50 ... 63,00 MHz		34	38	—	dB
77,00 ... 77,50 MHz		28	36	—	dB
77,50 ... 90,00 MHz		35	41	—	dB
Group delay at f_C	τ_C	—	1,1	—	μs
Group delay ripple (p-p) 65,50 ... 74,50 MHz	$\Delta\tau$	—	80	200	ns
Temperature coefficient of frequency	TC_f	—	-87	—	ppm/K


SAW Components
B3605
Low-Loss Filter
70,00 MHz
Data Sheet
Characteristics

Operating temperature:	$T = -40\text{ }^{\circ}\text{C} \dots 85\text{ }^{\circ}\text{C}$
Terminating source impedance:	$Z_S = 50\ \Omega$ and matching circuit(Balanced)
Terminating load impedance:	$Z_L = 50\ \Omega$ and matching circuit(Balanced)
Group delay aperture	80 kHz

		min.	typ.	max.	
Center frequency (Center between 6dB points)	f_C	69,50	70,00	70,50	MHz
Insertion attenuation at f_C	α_C	—	9,8	10,8	dB
Amplitude ripple (p-p) 67,00 ... 73,00 MHz	$\Delta\alpha$	—	0,6	1,0	dB
Phase ripple (p-p) 65,50 ... 74,50 MHz	$\Delta\varphi$	—	17,0	20,0	$^{\circ}$
Pass bandwidth					
$\alpha_{rel} \leq 1\text{ dB}$	B_{1dB}	8,1	8,3	—	MHz
$\alpha_{rel} \leq 3\text{ dB}$	B_{3dB}	9,1	9,3	—	MHz
$\alpha_{rel} \leq 30\text{ dB}$	B_{30dB}	—	12,8	13,2	MHz
Relative attenuation (relative to α_C)	α_{rel}				
50,00 ... 62,50 MHz		43	45	—	dB
62,50 ... 63,00 MHz		34	38	—	dB
77,00 ... 77,50 MHz		26	35	—	dB
77,50 ... 90,00 MHz		35	38	—	dB
Group delay at f_C	τ_C	—	1,1	—	μs
Group delay ripple (p-p) 65,50 ... 74,50 MHz	$\Delta\tau$	—	80	200	ns
Temperature coefficient of frequency	TC_f	—	- 87	—	ppm/K

Data Sheet


Matching circuit: unbalanced - unbalanced

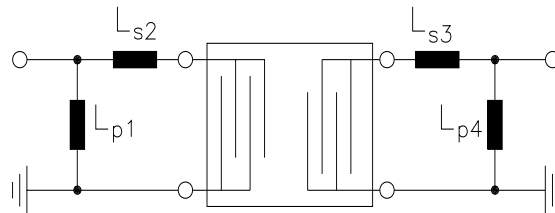

$L_{s1}=180\text{nH}$
 $L_{s2}=100\text{nH}$

$L_{s3}=18\text{nH}$
 $L_{s4}=270\text{nH}$

Matching circuit: balanced - balanced

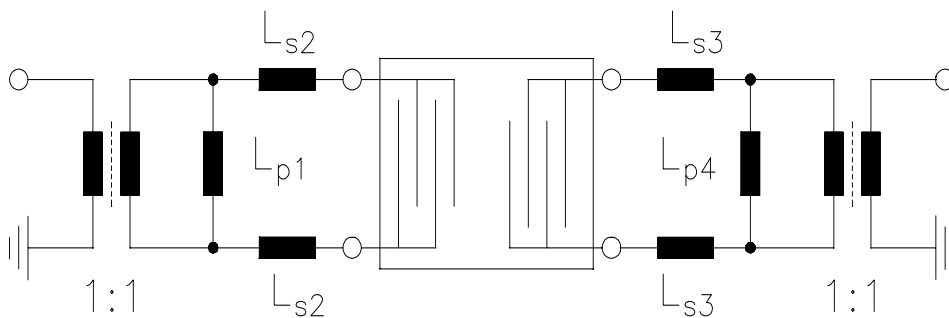


$L_{s1}=180\text{nH}$
 $L_{s2}=56\text{nH}$

$L_{s3}=10\text{nH}$
 $L_{s4}=270\text{nH}$


Note: Component values depend on PCB layout.

Data Sheet

Normalized frequency response(unbalanced-unbalanced)

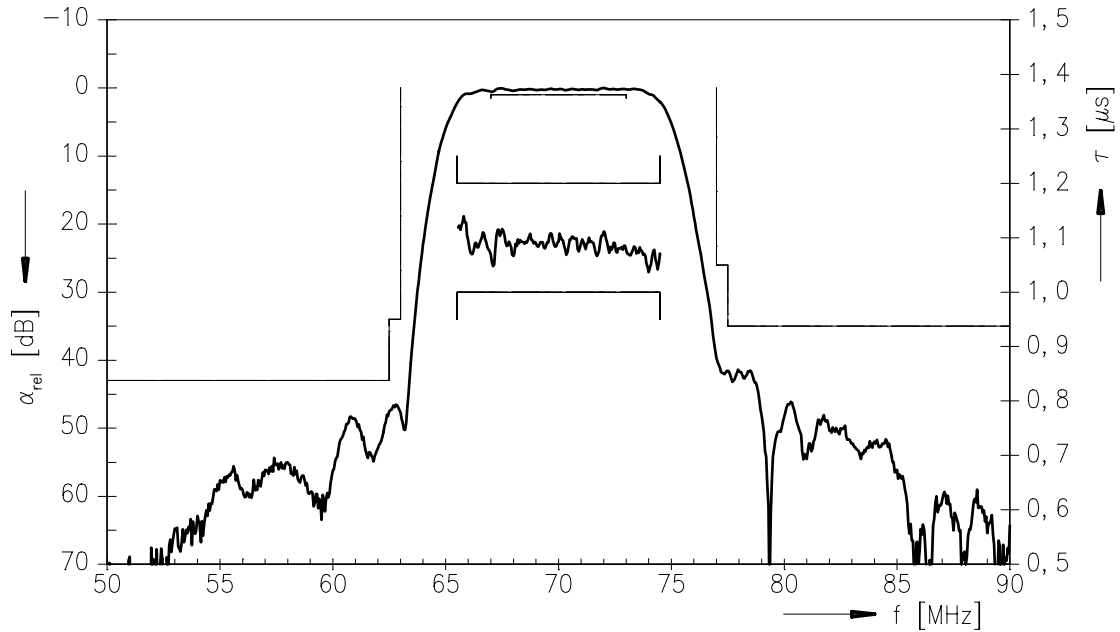


Normalized frequency response

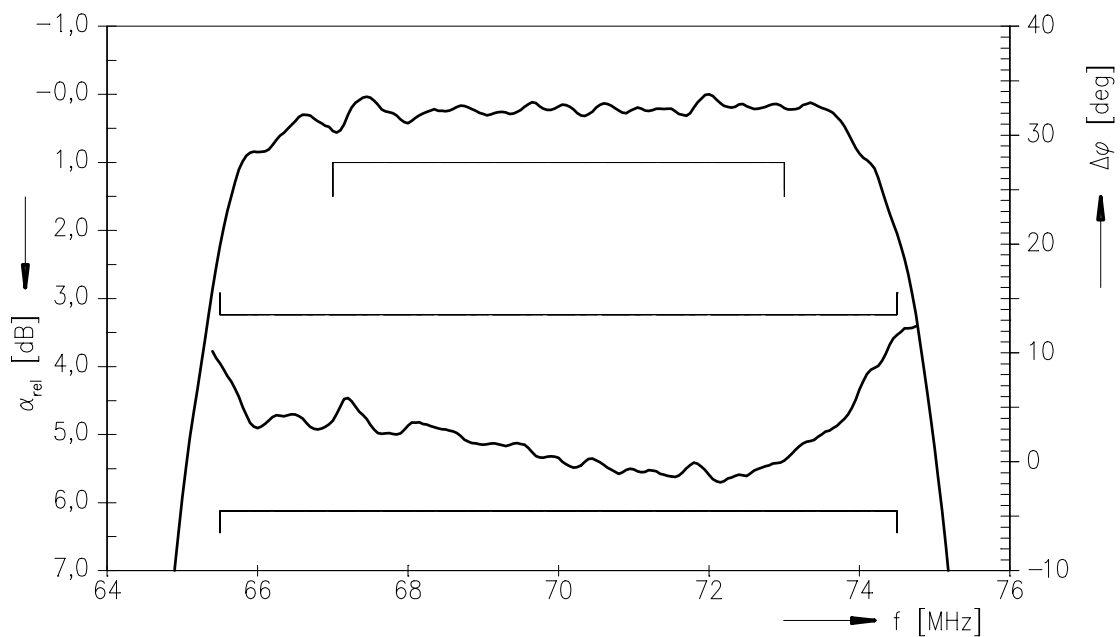


Data Sheet

Normalized frequency response(balanced-balanced)

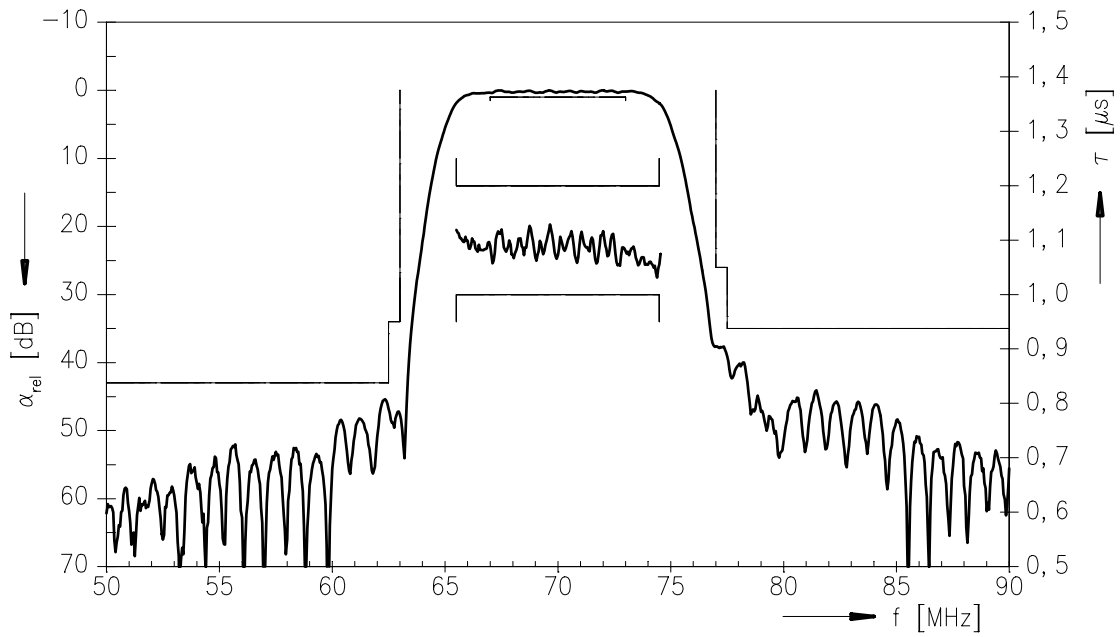

Normalized frequency response

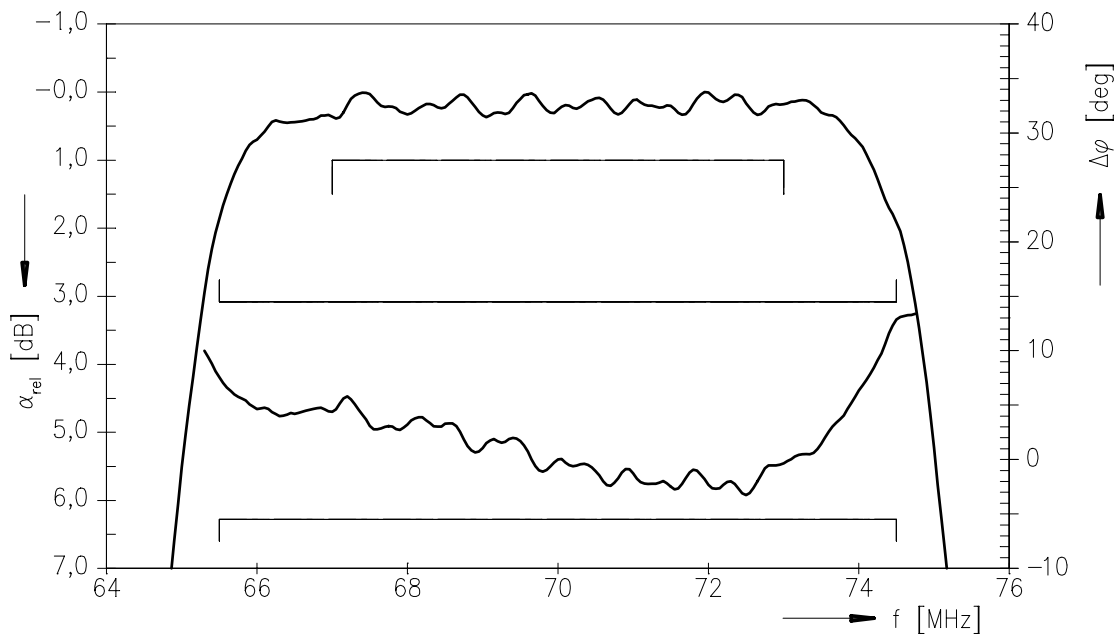

Data Sheet**Attachment**

- 1) For a duration < 50 ms source power may be raised to 20 dBm.
- 2) Pyroelectric pulse amplitude < 50 mV.
- 3) If external impedances are the same, input port and output port may be reversed without any changes of the performance.

Published by EPCOS AG**Surface Acoustic Wave Components Division, SAW MC IS****P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2003. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.