
Addressable 5mm RGB DIP Board



Product Description



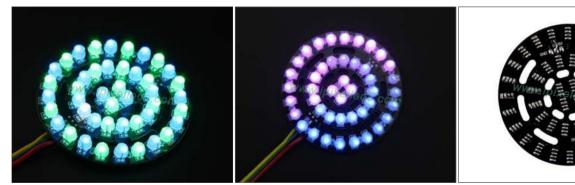

this is a full board in 66mm Diameter

there are many hole in center of the board which are for mounting purpose.


looks like it consist by 3 circle, but it's not removeable as it's a full sheet.

44pcs addressable DIP 5mm lamp, both in and output Soldering Pad on back side of the PCB, 5 VCC operation, SPI signal.

Product Datasheet

Product Number	M066044XA3SF
LED Quantity	44 leds
Explicit index	80
LED Type	DIP 5mm RGB
Color	RGB
Size (mm)	66mmØ
Luminous intensity	R=44000mcd ,G=55000mcd ,B=66000mcd
IP Level	IP20
Beam Angle	270°
Guarantee quality	1 years
	l .

Outline Dimension

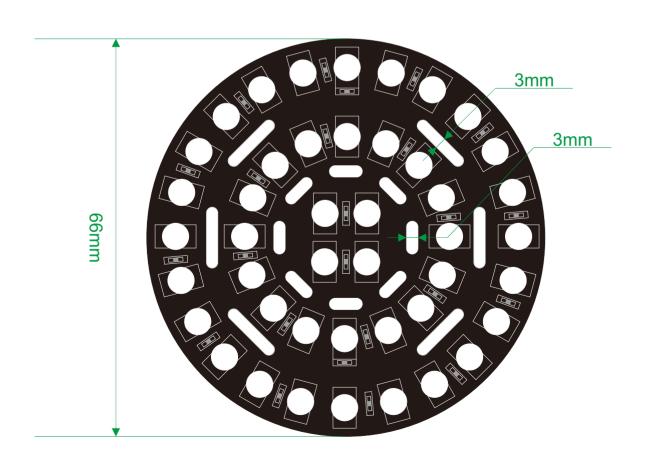

*The following is the lamp details

SPECIFICATION SHEET

Description:

■ 4.8*5.8MM

■ Lens Color: Water Clear

■ Emitting Color: RGB

■ Viewing Angle:270°

CUSTOMER	APPROVED BY	CHECKED BY	PREPARED BY
APPROVED			
SIGNATURES			

Description:

5mm WS2812Bstraw hat LED is a light emitting diode with integrated digital control circuitin shape of 5mm Straw hat. Each lighting element is a pixel. The intensities of the pixels are contained within the intelligent digital interface input. The output is driven by patented PWM technology, which effectively guarantees high consistency of the color of the pixels. The control circuit consists of a signal shaping amplification circuit, a built-in constant current circuit, and a high precision RC oscillator.

The data protocol being used is uni-polar NRZ communication mode. The 24-bit data are transmitted from the controller to DIN of the first element, and if it is accepted it is extracted pixel to pixel. After an internal data latch, the remaining data pass through the internal amplification circuitand send out on the DO port to the remaining pixels. The pixel is reset after the end of DIN. Using automatic shaping forwarding technology makes the number of cascaded pixels without signal transmission only limited by signal transmission speed.

The LED has a low driving voltage (which allows for environmental protection and energy saving), high brightness, scattering angle, good consistency, low power, and long life. The control circuitis integrated in the LED above.

Main Application Field:

- Full color LED string light, LED full color module, LED guardrail tube, LED appearance / scene lighting,spotlight for advertsing
- LED point light, LED pixel screen, LED shaped screen, a variety of electronic products, electrical equipment etc..


Description:

- LED internal integrated high quality external control line serial cascade constant current IC:
- control circuitand the RGB chip in Lamps LED components, to form a complete control of pixel, color mixing uniformity and consistency;
- built-in data shaping circuit, a pixel signal is received after wave shaping and output waveform distortion will not guarantee a line;
- The built-in power on reset and reset circuit, the power does not work;
- gray level adjusting circuit (256 level gray scale adjustable);
- red drive special treatment, color balance;
- line data transmission;
- plastic forward strengthening technology, the transmission distance over 10m;
- Using a typical data transmission frequency of 800 Kbps with refreshing rate of 30 frames/sec.

iPixel LED Light Co., Ltd

Mechanical

Dimension:

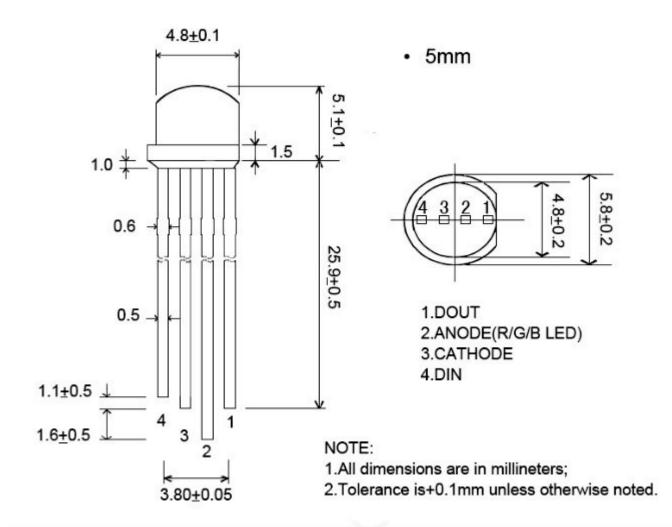

NO.	Sy m bol	Function des c ri pt ion
1.	D O UT	Control data signal output
2.	VD D	Power supply LED
3.	VS S	Ground
4.	DIN	Control data signal input

Absolute Maximum Ratings (Ta=25℃,VSS=0V)

Paramet e r	Sy m bol	Range	Unit
Power supply voltage	VD D	+3.5~+5.5	V
Logic input voltage	VIN	-0.5~VDD+0.5	V
Workingtemperature	Topt	-40~+85	$^{\circ}\!\mathbb{C}$
Storage temperature	Tstg	-50~ +150	°C
ESD pressure	VESD	4K	V

Electrical/Optical Characteristics (TA= 25° C, VDD=5.0V, VSS=0V)

RED COLOR:

Param eter	Symbol	Min	Т у р.	Max	Unit	Test Condition
Forw ard v olt ag e	$V_{\rm F}$	1.8	2.0	2.2	V	IF=20 mA
Luminous intensity	I_V	1000	125 0	1500	mcd	IF=20 mA
Peak emission wavelength	λp	620	622.5	625	nm	V
Half intensity angle	2 θ 1/2	V	120	V	deg	V

GREEN COLOR:

Parameter	Symbol	Min	Т у р.	Max	Unit	T e st Condi tion
Forw ard v olt ag e	$V_{\rm F}$	3.0	3.2	3.4	V	IF=20 mA
Lumi nous inten sity	I _V	1500	185 0	2200	mcd	IF=20 mA
Peak emission wavelength	λp	520	522.5	525	nm	V
Half intensity angle	2 θ 1/2	V	120	V	deg	V

BLUE COLOR:

Parameter	Symbol	Min	Тур.	Max	Unit	Test Condition
Forw ard v olt ag e	V_{F}	3.0	3.2	3.4	V	IF=20 mA
Luminous intensity	I_V	700	850	1000	mcd	IF=20 mA
Peak emission wavelength	λp	465	467.5	470	nm	V
Half intensity angle	2 θ 1/2	V	120	V	deg	V


Parameter	Symbol	Min	Typical	Max	Unit	Test
The chip supply	VDD		5.2		V	
voltage	1/00 1111			0.0	X 7	
R/G/B port	VDS, MAX			26	V	
pressur e						
			49	-	mA	DOUT cone ct groun d ,
DOUT	IDOH					t h e max imum driv e
DOUT drive						curr ent
capability	IDOL		-50	-	mA	DOUT conect +, the
	IDOL					largest current
The s ignal i n put	VIH	3.4		-	V	VDD COV
flip thre shol d	VIL			1.6	V	VDD=5.0V
The freq uency of	FP WM		1.2	-	KHZ	
PWM						
Static power	I D D		1		mA	
consumption						



iPixel LED Light Co., Ltd

Dynamic Parameters (Ta=25℃):

Pa	arameter	Symbol	Min	Typical	Max	Unit	Test
The spe	The speed of data			800	-	KHZ	The duty rati o of 67%
transmission							(dat a 1)
DOUT	transmission	TP LH			500	ns	DIN→DOUT
delay		TP HL			500	ns	ן ט ט ע⊸אוע ן
IOUT	Rise/Drop	Tr		100		ns	VDS=1.5
Time							IOUT=13mA

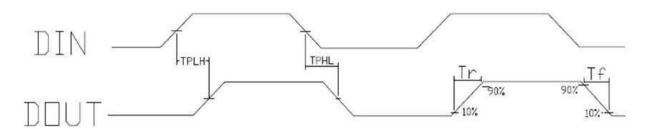


The Data Transmission Time (TH+TL= $1.25 \mu s \pm 600 ns$):


ТОН	0 code, high level time	0.3µs	±0.15µs
TOL	0 code, low level time	0.9µs	±0.15µs
TIH	1 code, high level time	0.6µs	±0.15µs
TIL	1 code, low level time	0.6µs	±0.15µs
Trst	Reset code, low level time	80µs	

Timing waveform:


Input code:



Connction mode:



The method of data transmission:

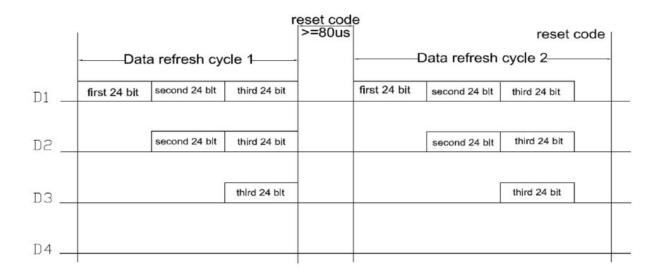


Note: the D1 sends data for MCU, D2, D3, D4 for data forwarding automatic shaping cascade circuit.

The data **str**ucture of 24bit:

G7	G6	G5	G4	G3	G2	G1	GO	R7	R6	R5	R4	R3	R2	R1	RO	В7	В6	В5	В4	ВЗ	В2	B1	ВО
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

Note: high starting, in order to send data (G7 - G6 -B0)

The typical application circuit:

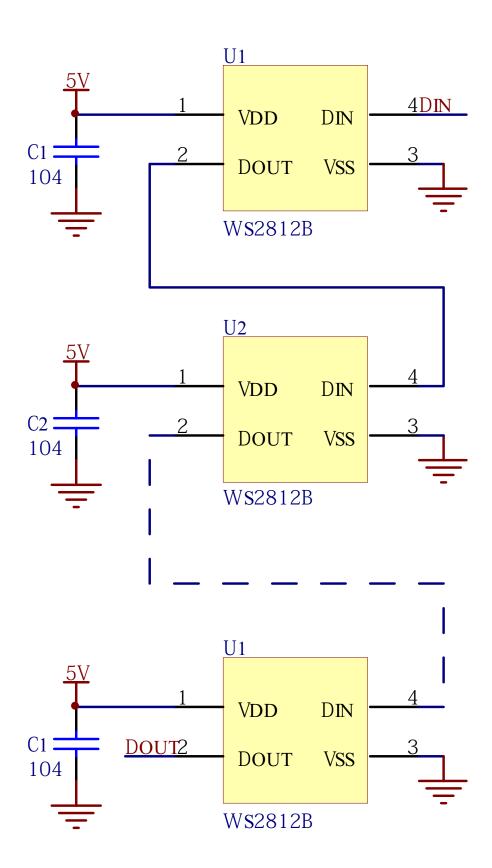

Standard LED Performance Graph:

