

Application

- ❖ Low loss Saw Duplexer for mobile telephone LTE and WCDMA Band V systems.
- ❖ Low insertion attenuation and low passband ripple.
- ❖ Usable passband 25 MHz
- ❖ High isolation between Tx and Rx.

Electrical Specifications


Parameters				Value	Unit
Tx to ANT	Insertion Loss, typ/max		824 ~ 849 MHz	1.4 / 1.8	dB
			826.5 ~ 846.5 MHz	1.3 / 1.7	dB
	Amplitude Ripple		824 ~ 849 MHz	0.5 / 1.3	dB
	VSWR, typ/max	ANT	824 ~ 849 MHz	1.6 / 2.0	-
		Tx		1.6 / 2.0	-
	Input Power (+50°C, 5000h, CW)		824 ~ 849 MHz	+30	dBm
	Attenuation, min/typ		10 ~ 420 MHz	35 / 44	dB
			420 ~ 494 MHz	35 / 40	dB
			494 ~ 764 MHz	27 / 32	dB
			764 ~ 804 MHz	28 / 30	dB
			860 ~ 869 MHz	3 / 6.5	dB
			869 ~ 894 MHz	45 / 54	dB
			1559 ~ 1606 MHz	30 / 34	dB
			1710 ~ 1785 MHz	28 / 32	dB
			1920 ~ 1980 MHz	25 / 29	dB
			2110 ~ 2170 MHz	25 / 28	dB
			2400 ~ 2500 MHz	22 / 25	dB
			4900 ~ 5950 MHz	10 / 13	dB
ANT to Rx	Insertion Loss, typ/max		869 ~ 894 MHz	1.7 / 2.2	dB
			871.5 ~ 891.5 MHz	1.6 / 1.9	dB
	Amplitude Ripple		869 ~ 894 MHz	0.4 / 1.0	dB
	VSWR, typ/max	ANT	869 ~ 894 MHz	1.5 / 2.0	-
		Rx		1.5 / 2.0	-
	Attenuation, min/typ		10 ~ 447 MHz	50 / 60	dB
			447 ~ 824 MHz	42 / 50	dB
			824 ~ 849 MHz	45 / 58	dB
			909 ~ 979 MHz	12 / 20	dB
			1710 ~ 1785 MHz	45 / 62	dB
			1850 ~ 1920 MHz	40 / 60	dB
			1920 ~ 2400 MHz	40 / 55	dB
2400 ~ 2500 MHz			40 / 60	dB	
		4900 ~ 5950 MHz	44 / 60	dB	

SAW DUPLEXER RSD-836.500-881.500-1814-TR-NS6

page 2 of 5

Tx to Rx	Isolation, min/typ	824 ~ 849 MHz	55 / 58	dB
		826.5 ~ 846.5 MHz	55 / 58	dB
		869 ~ 894 MHz	52 / 58	dB
		871.5 ~ 891.5 MHz	52 / 55	dB
		1574 ~ 1577 MHz	50 / 60	dB
		1638 ~ 1708 MHz	50 / 60	dB
		2462 ~ 2557 MHz	45 / 60	dB
DC Voltage VDC			3	V
ESD Voltage ESD (MM)			50	V
Sensitive Discharge Device ESD (HBM)			175	V
Operating Temperature Range			-30 ~ +85	°C
Storage Temperature Range			-40 ~ +85	°C
MSL			2	-


Dimension

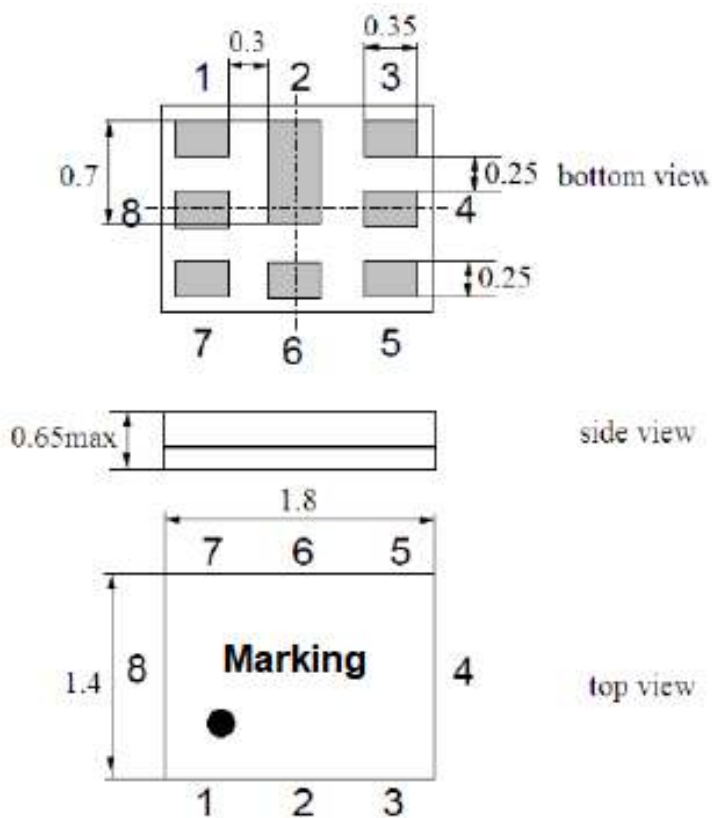

Unit: mm


PIN	SYMBOL	FUNCTION
1	Rx	Rx Output
2,4,5,7,8	GND	Ground
3	Tx	Tx Input
6	ANT	Antenna

Test Circuit

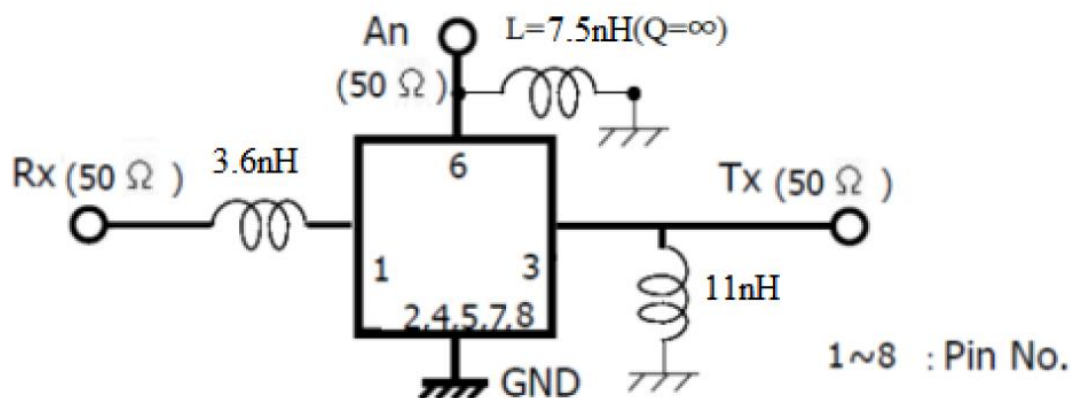


Frequency Characteristics

Tx to Ant

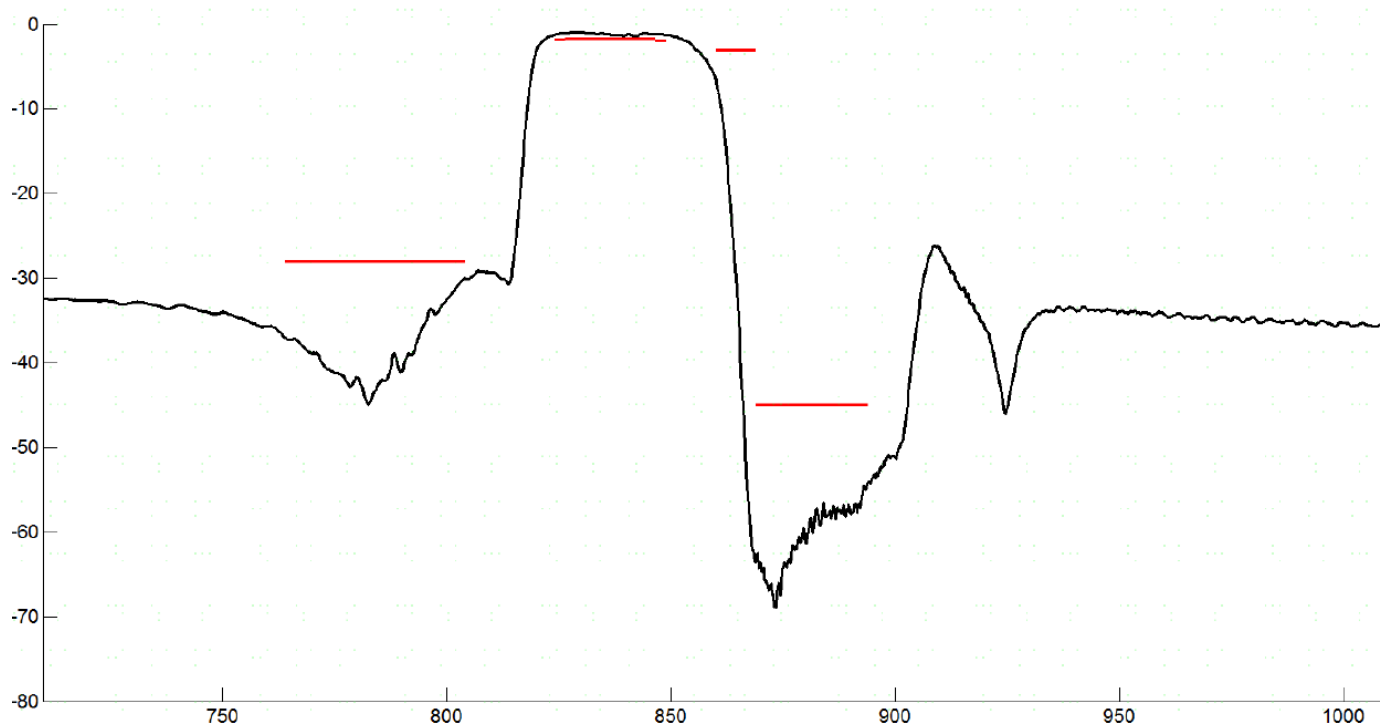



SAW DUPLEXER
RSD-836.500-881.500-1814-TR-NS6

page 4 of 5

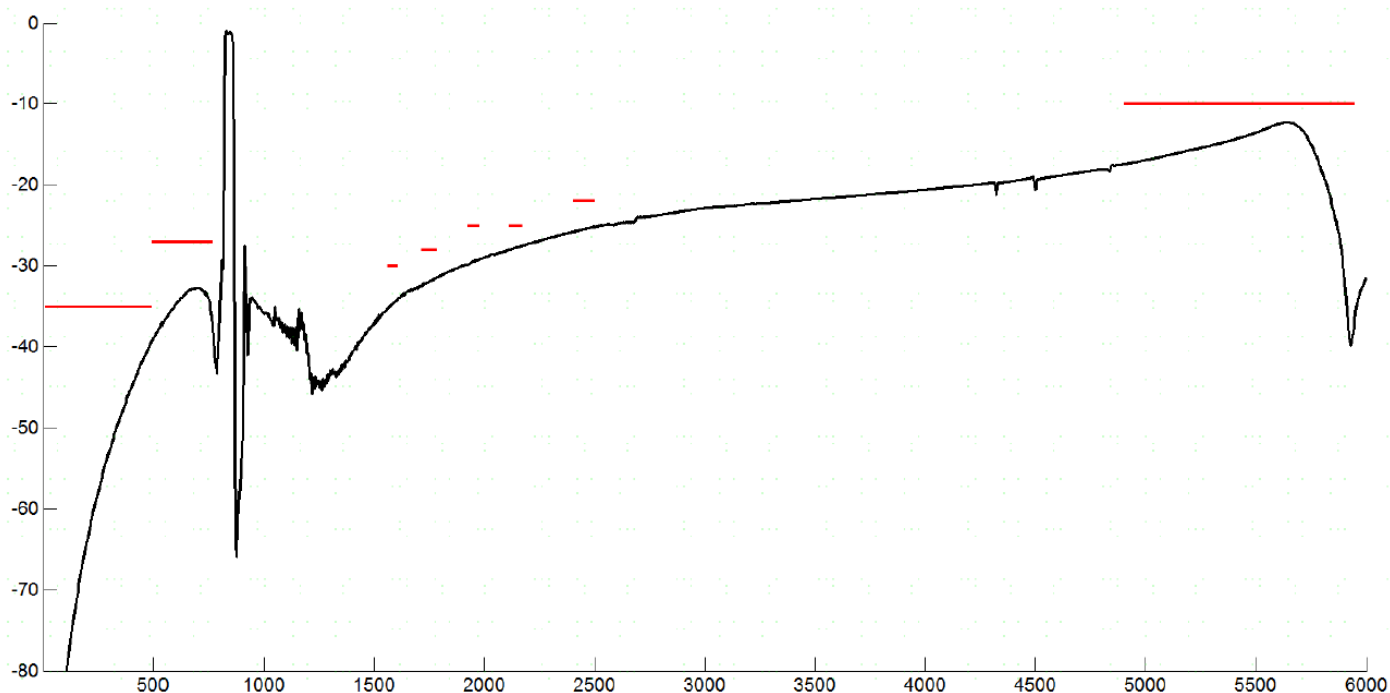


Ant to Rx

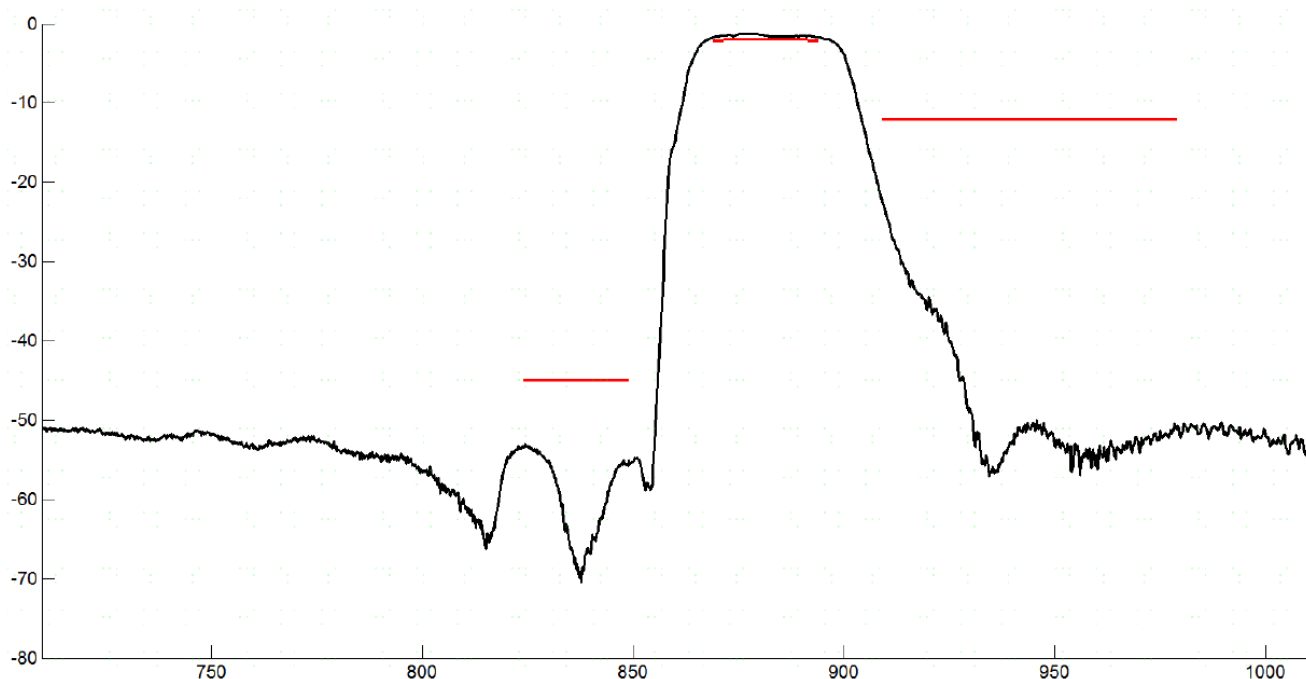

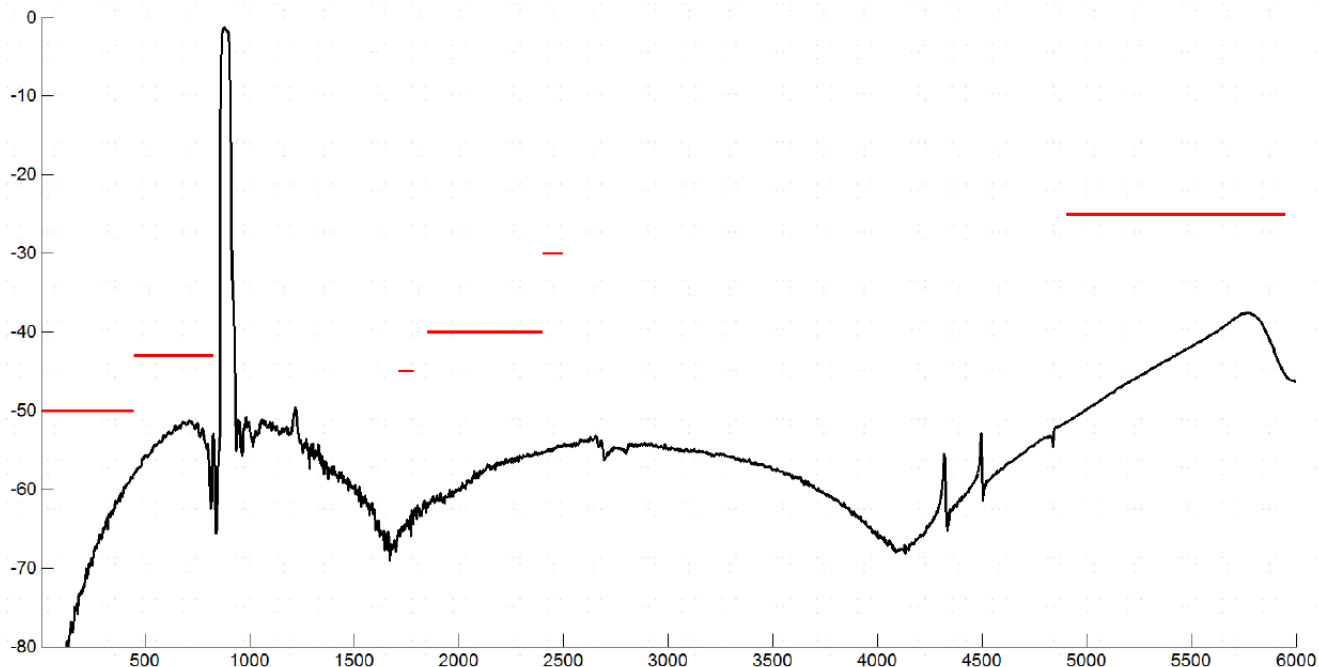

Tx to Rx Isolation

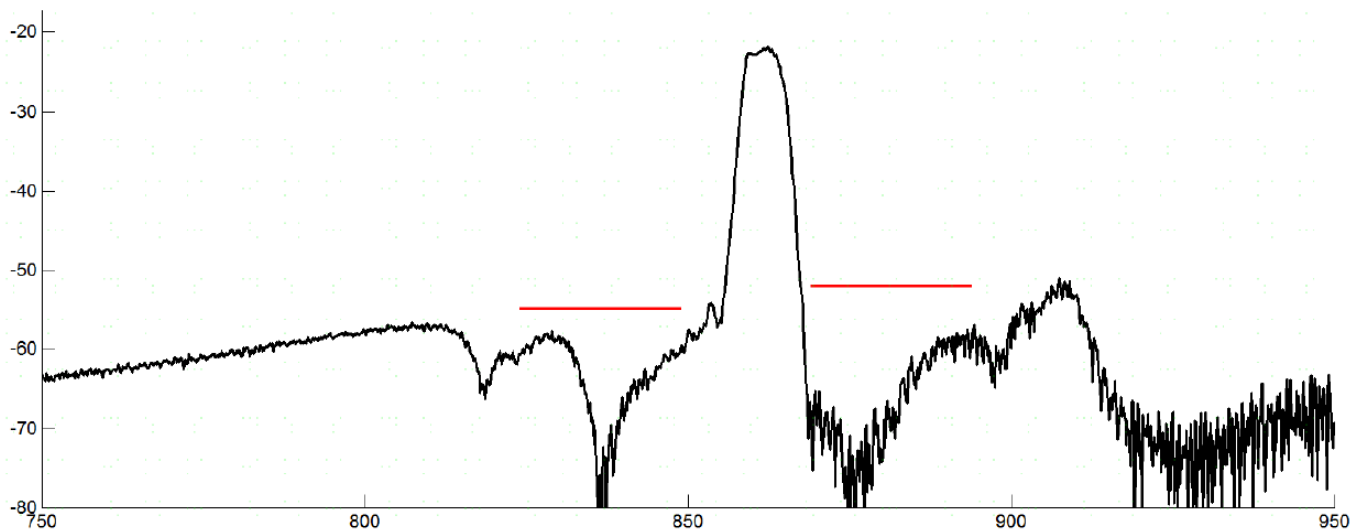

APPROVAL

DRAWN BY	AR, April 21, 2020
APPROVED BY	CP, April 21, 2020
REVISION	A, Initial Release



Raltron Electronics / RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided only for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.

Copyright © 2016, Raltron Electronics / RAMI Technology USA, LLC. All rights reserved. No part of this document may be reproduced in any form without the prior written permission of Raltron Electronics / RAMI Technology USA, LLC.