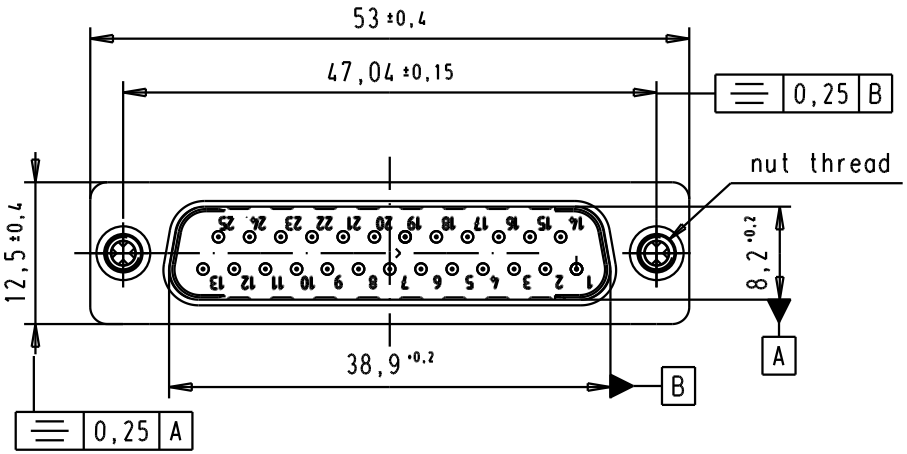



PCB Layout, Component side, PCB thickness 1,6 mm

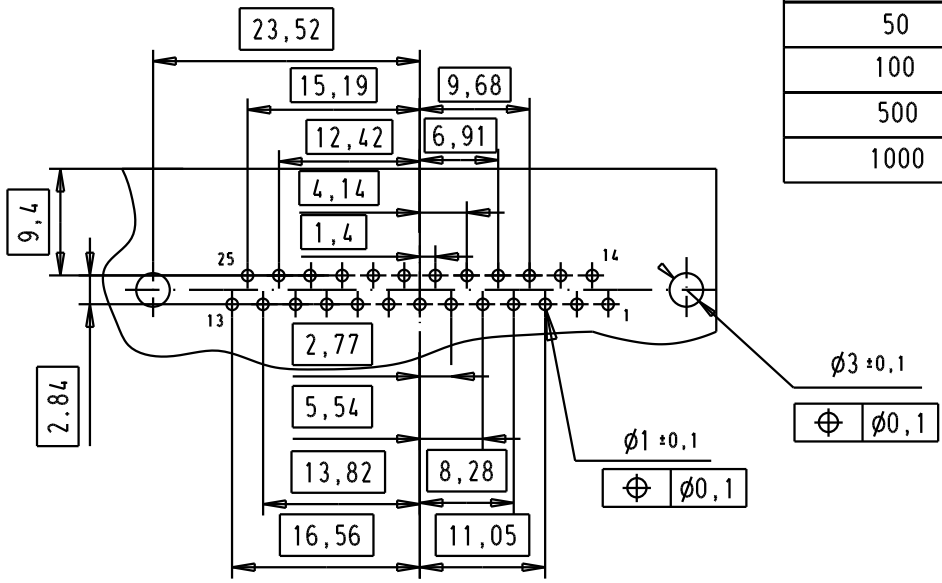

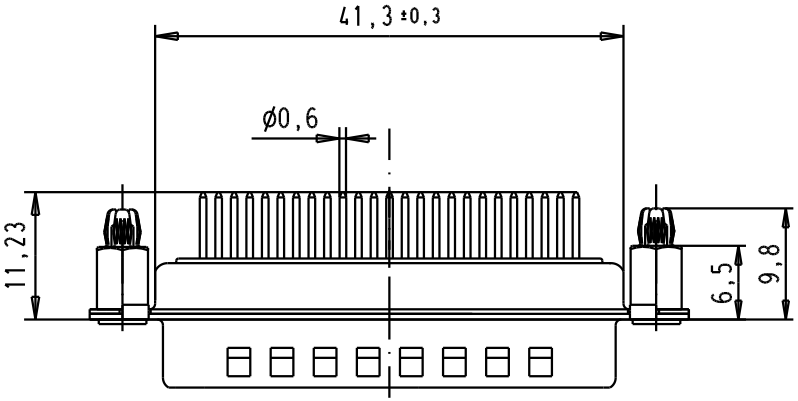

SPECIFICATION

Mating Cycles	500
Filter type	C
Capacitance	47pf ±20%
Working Voltage	100v
Current Rating	7,5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION dB
5	-
10	-
50	-
100	-
500	30dB
1000	35dB

							Dat.	Name			
						Detail.	8-JUL-02	CV	All Dim. in mm Orig. Size DIN A 4	D-Sub, male, straight, 25 Poles, turned solder pins, tin plated shell with dimples, spacer nuts and board-locks	Ma?Mstab/ *Scale* 1.5:1
						Insp.					
						Stand.					
09643227216	M3		33423	06/02/06	JMDR	HARTING EURL F-95972 Paris				TB 0964322721x	Blatt/ *Page* 2/3
09643227215	UNC 4-40		31058	8-JUL-02	CV					Sub.	
Part number	Nut thread		Mod.	Dat.	Name						