

# QUICK-LINK ACCESSORY FOR UP-LINK™ FUSE HOLDER

## Daisy Chain Connector





### Description



Littelfuse Quick-LINK daisy chain connectors provide optimal utilization of multiple Up-LINK remote indicating fuse holders when integrated with a PLC. These products are used to daisy chain multiple Up-LINK units together and reduce the number of PLC I/O ports required.

### Dimensions Inches (mm)

3-pole

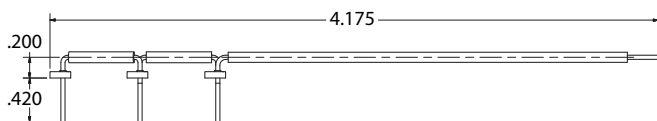

9-pole

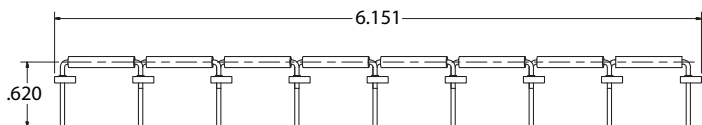

### Features/Benefits

- Requires only one PLC I/O port for multiple Up-LINK fuse holders
- Simple snap-in feature saves installation and assembly costs
- Connectors can be cut to size to fit number of poles other than 3 or 9.
- Custom length wires can be soldered to available terminals for application flexibility
- Allow for parallel connection of any number of Up-LINK fuse holders
- Only two wire connections required for use
- Compatible with Up-LINK remote indication fuse holder

### Specifications

<b>Voltage Rating</b>	28 VDC
<b>Amperage</b>	25 mA maximum current
<b>Extension Wire Size</b>	20 AWG Stranded Max. 18 AWG Solid Max.

### Ordering Information

POLES	TYPE	ORDERING NUMBER
3	Base	QLINK3B.Z
9	Extender	QLINK9E.Z

### Web Resources

Sample requests, and other technical information:  
[www.littelfuse.com/quick-link](http://www.littelfuse.com/quick-link)

FAQ Document for integration with Up-LINK Fuse holder  
[www.littelfuse.com/uplink](http://www.littelfuse.com/uplink)

Quick-LINK Assembled

