



ULTRA-SMALL CERAMIC

Power Splitter/Combiner

QCN-27+

2 Way-90° 50Ω 1700 to 2700 MHz

FEATURES

- Low insertion loss, 0.4 dB typ.
- High isolation, 26 dB typ.
- Wrap-around terminal for excellent solderability
- Ultra small, 0.12"x0.06"x0.035"
- Patent pending

APPLICATIONS

- Balanced amplifiers
- Modulators
- PCS/DCS
- MMDS
- ISM



Generic photo used for illustration purposes only

CASE STYLE: FV1206-1

+RoHS Compliant
 The +Suffix identifies RoHS Compliance.
 See our website for methodologies and qualifications

ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		1700		2700	MHz
Insertion Loss, above 3.0 dB	1700-1800		0.4	0.7	dB
	1800-2000		0.4	0.7	
	2000-2400		0.4	0.7	
	2400-2700		0.5	0.9	
Isolation	1700-1800	18	21		dB
	1800-2000	18	22		
	2000-2400	20	30		
	2400-2700	20	30		
Phase Unbalance	1700-1800		3	6	Degree
	1800-2000		2	6	
	2000-2400		3	6	
	2400-2700		3	6	
Amplitude Unbalance	1700-1800		0.5	1.0	dB
	1800-2000		0.3	0.8	
	2000-2400		0.2	0.8	
	2400-2700		0.6	1.0	
VSWR	1700-1800		1.2		(:1)
	1800-2000		1.2		
	2000-2400		1.2		
	2400-2700		1.2		


1. For applications requiring DC voltage to be applied to the RF ports, add suffix letter "D" to part no. DC resistance to ground is 100 Mohms min.

MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	15W* max.

* Derate linearly to 7W at 100°C ambient. Permanent damage may occur if any of these limits are exceeded.

ELECTRICAL SCHEMATIC (NOTE 1)






PIN CONNECTIONS

SUM PORT	1
PORT 1 (0°)	4
PORT 2 (+90°)	6
GROUND	2,5
50 OHM TERM EXTERNAL	3

PRODUCT MARKING: N/A



DEMO BOARD MCL P/N: TB-255
SUGGESTED PCB LAYOUT (PL-131)

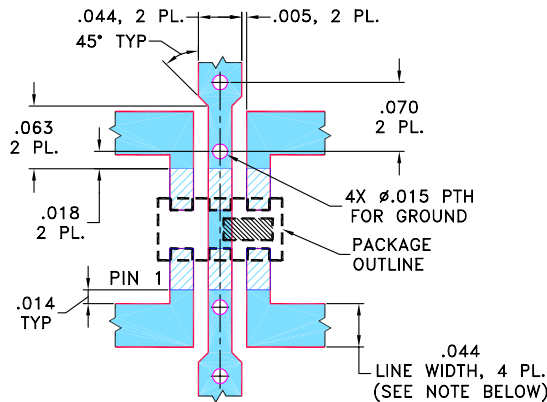


NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

OUTLINE DRAWING

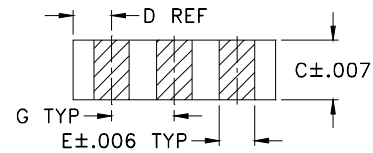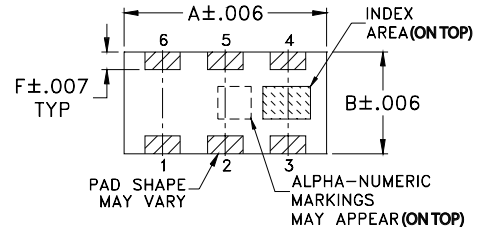

PCB Land Pattern

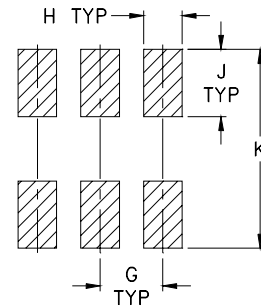

Suggested Layout,
Tolerance to be within ±.002

OUTLINE DIMENSIONS (Inches/mm)

A	B	C	D	E	F
.126	.063	.035	.024	.022	.011
3.20	1.60	0.89	0.61	0.56	0.28
G	H	J	K	wt	
.039	.024	.042	.123	grams	
0.99	0.61	1.07	3.12	.020	

TAPE & REEL INFORMATION: F75



ULTRA-SMALL CERAMIC

Power Splitter/Combiner




QCN-27+

2 Way-90° 50Ω 1700 to 2700 MHz

TYPICAL PERFORMANCE DATA

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR (:1)		
	S-1	S-2				S	1	2
1700.00	3.12	3.68	0.56	21.52	88.45	1.23	1.26	1.19
1800.00	3.24	3.55	0.31	22.55	88.66	1.21	1.24	1.17
1900.00	3.33	3.44	0.12	23.84	88.92	1.18	1.23	1.14
2000.00	3.40	3.37	0.03	25.33	88.93	1.16	1.21	1.12
2100.00	3.45	3.33	0.12	26.85	88.95	1.14	1.20	1.10
2200.00	3.48	3.32	0.16	28.90	89.07	1.12	1.19	1.09
2300.00	3.48	3.33	0.15	31.22	89.25	1.10	1.18	1.09
2400.00	3.45	3.37	0.08	34.26	89.24	1.08	1.17	1.10
2500.00	3.40	3.44	0.04	38.56	89.27	1.06	1.17	1.11
2600.00	3.33	3.54	0.22	45.07	89.20	1.04	1.16	1.12
2650.00	3.28	3.61	0.33	52.09	89.34	1.03	1.16	1.13
2700.00	3.23	3.68	0.45	57.17	89.32	1.01	1.16	1.14

1. Total Loss = Insertion Loss + 3 dB splitter loss.

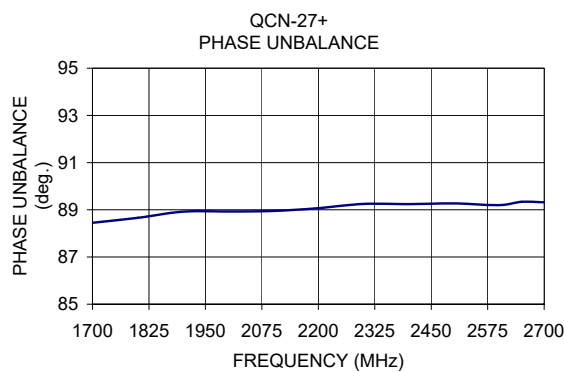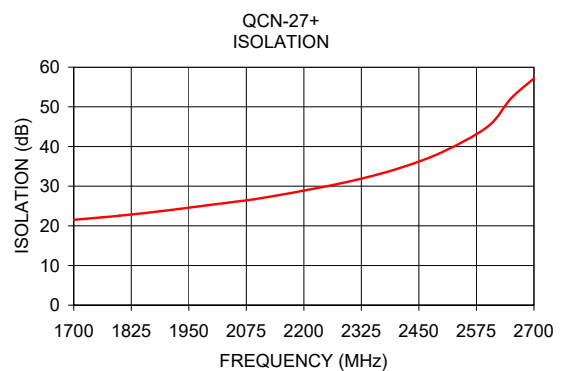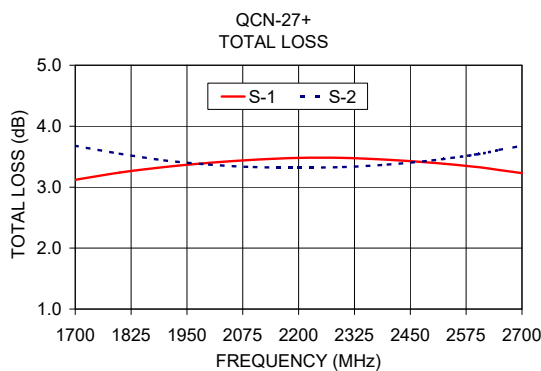

- NOTES**
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 - B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 - C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

