

## SUMMARY

### # Wires

Low voltage 8



*Image is for illustrative purpose only*

Series	2M
Termination type	Female crimp
IP rating	68 mated (mating interface)
AWG wire size	24.00 - 22.00
Cable Ø	0.00 - 0.00 mm
Status	active
Matching parts	<a href="#">FMN.2M.514.XLCT6</a>

### Download

[Request a quote](#)

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	PM*: Free receptacle with knurled grip
Keying	3 keys (beta=165, gamma=30, plug: male contacts, receptacle: female contacts)
Housing Material	Aluminium (nickel plated [SAE AMS QQ N 290], anthracite color) shell and nut, other pieces bronze/brass
Weight	20.17 g

### Performance

Configuration	2M.514 : 8 High Speed, Low Voltage (CAT 6A)
Insulator	L: PEEK
Rated Current	


### Others

Temp (min / max): -20°C / +200°C  
Humidity (max): 21 days at 95%  
Gunfire vibration: 25 Hz - 2000 Hz, 3 axis (Apache helicopter)  
Vibration-Sine: 30 g, 3 axes, 12 hr [10 Hz - 2000 Hz]

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*

Vibration-Random: 37.8 g rms - 3 axes, 4 hr amb [50 Hz - 2000 Hz]  
 Shock Resistance: 300 g [ 3 ms]  
 Lighting strike EIA 364-75: 10K amps - 6 times  
 Thermal shock: 5 cycles: -65 °C to +150 °C  
 EMI Shielding EIA 364-66A: >= 80 dB (1 GHz), >=70 dB (3 GHz), >= 58 dB (6 GHz), >= 40 dB (10 GHz)  
 Salt Spray Corrosion: max. 48 hr

## DRAWINGS

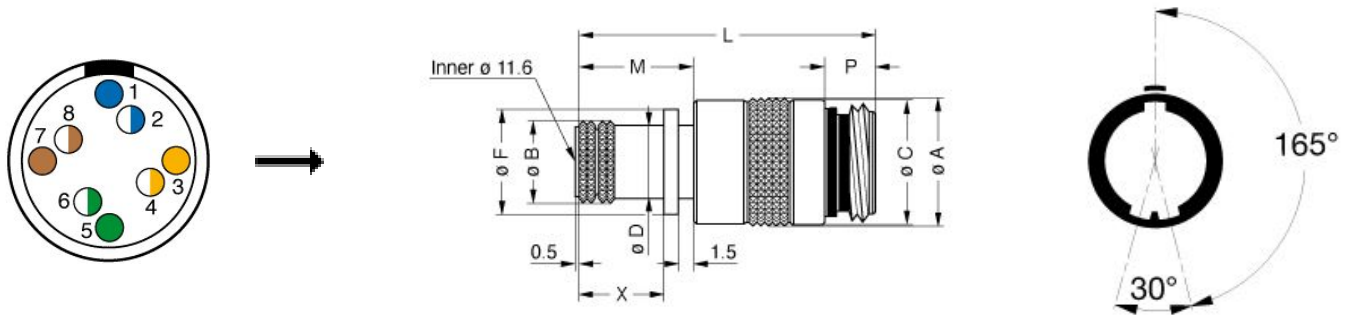

### Dimensions

	A	B	C	D	F	L	M	P	X
mm.	17.6	14	17.2	13	15.5	31.5	12.6	5.3	9.6
in.	0,69	0,55	0,68	0,51	0,61	1,24	0,50	0,21	0,38

## RECOMMENDED BY LEMO

### Tools

Positionner: [DCE.91.072.MVCM](#)

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*