

## CircuitWorks<sup>®</sup> No-Clean Tacky Flux

**Product# CW8500**

### Product Description


CircuitWorks No-Clean Tacky Flux is a Type ROL0 formulation designed for BGA rework requiring high-reliability, stability and cleanliness. CircuitWorks No-Clean Tacky Flux gel composition holds the BGA component in position even with board movement. Its lower viscosity allows easy application and contains no ionic material. CircuitWorks No-Clean Tacky Flux is suitable for clean room applications.

- Excellent wetting ability
- Long tack time
- Noncorrosive, halide and halogen free
- Meets IPC requirements for ROL0, No Clean
- Excellent consistency
- Stable viscosity
- Conforms to ISO 9454
- Meets Bellcore TR-NWT-000078 requirements
- Meets DIN EN 29454-1 1.1.3.C classification

### Typical Applications

CircuitWorks No-Clean Tacky Flux may be used for electronics applications including:

- BGA rework and repair
- Sphere attachment to BGA
- Surface Mount Device Pads
- Switches
- Sockets

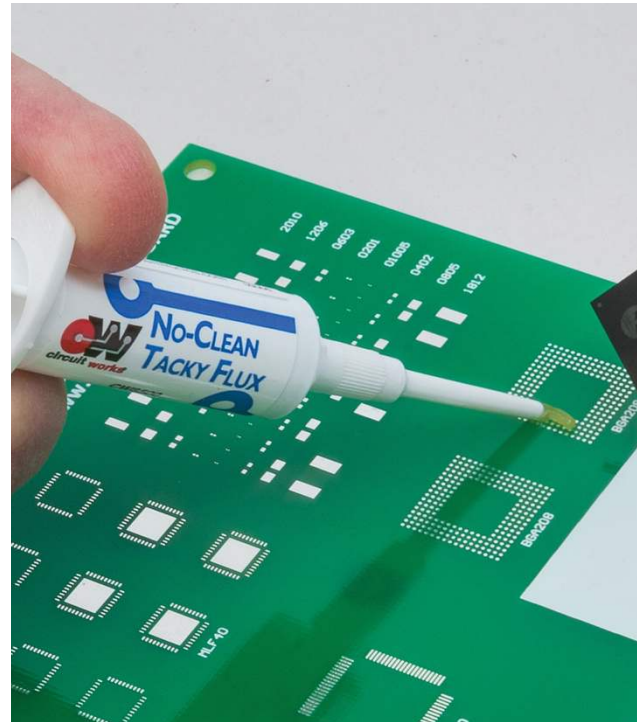

### Typical Product Data and Physical Properties

Flux Type:	No-Clean ROL0
Flash Point (TCC):	>284°F (140°C)
Appearance:	Light tan to dark brown
Odor:	Slight
Shelflife	2 years
RoHS Compliant	Yes



## CircuitWorks® No-Clean Tacky Flux

**Product# CW8500**

### Compatibility

CircuitWorks No-Clean Tacky Flux is generally compatible with most materials used in the electronics industry. As with any cleaning agent, material compatibility should be determined on a non-critical area prior to use.

### Usage Instructions

*For industrial use only. Read SDS carefully prior to use.*

**Flux Application:** CircuitWorks No-Clean Tacky Flux should only be applied to BGA rework areas on the circuit board, and not the entire board. Remove cap from syringe and gently depress the plunger. Spread the material over the BGA application area. Use a Control Wipe dry wipe to remove flux buildup from applicator tip.

**Cleaning:** No-Clean Tacky Flux residue does not need to be removed after reflow, but can be removed if required. Chemtronics Flux-Off No Clean Plus is an ideal cleaner for effective flux removal.

### Availability

**CW8500** 3.5 gm (0.12 oz) Syringe

### Environmental Impact Data

ODP	None
HCFC	None
VOC	No
HFC	None

### Technical and Application Assistance

Chemtronics provides a technical hotline to answer your technical and application related questions.

*The toll free number is: 1-800-TECH-401.*

### Note:

This information is believed to be accurate. It is intended for professional end users having the skills to evaluate and use the data properly. CHEMTRONICS does not guarantee the accuracy of the data and assumes no liability in connection with damages incurred while using it.

Chemtronics®, Flux-Off® and CircuitWorks® are registered trademarks of Chemtronics. All rights reserved. ControlWipes™ is a trademark of Chemtronics. All rights reserved.