



## 422 MHz SAW Bandpass Filter

**Part Number: AM422S1121**



Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-30	-	+80
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	0
Maximum Input Power	dBm	-	-	27
Source Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Load Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Package type & size	P			
Length x Width	mm <sup>2</sup>	-	3.8 x 3.8	-
Height	mm	-	-	1.4


Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	422.5	-
Insertion Loss within 420.0 ~ 425.0 MHz	dB	-	1.5	3.0
<b>Attenuation:</b>				
0.3 ~ 410.0 MHz	dB	38	47	-
410.0 ~ 415.0 MHz	dB	40	49	-
445.0 ~ 600.0 MHz	dB	40	48	-
600.0 ~ 1200.0 MHz	dB	33	38	-
1200.0 ~ 2000.0 MHz	dB	25	32	-
VSWR within 420.0 ~ 425.0 MHz	-	-	1.4	2.0

**Notes :** (1) No Matching Network




# 422 MHz SAW Bandpass Filter

**Part Number: AM422S1121**

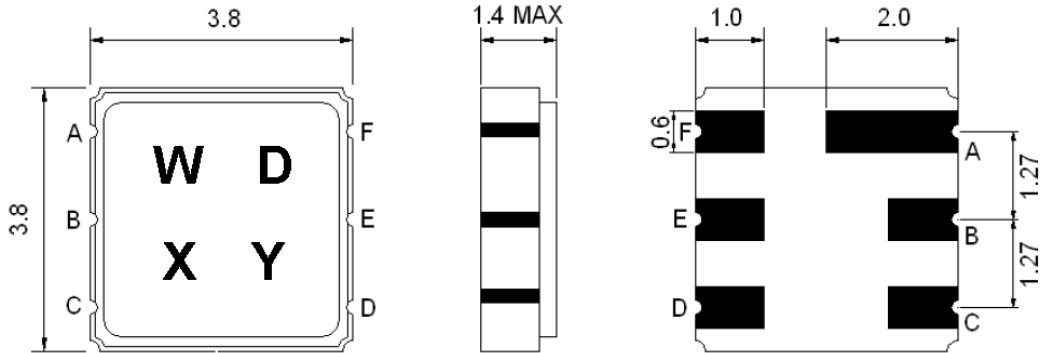

Marking Descriptions	
W	CDMA450 Application
D	Series Number
X	Date Code(Year)
Y	Date Code(Month)

Pin Description	
A, C, D, F	Ground
B	In
E	Out

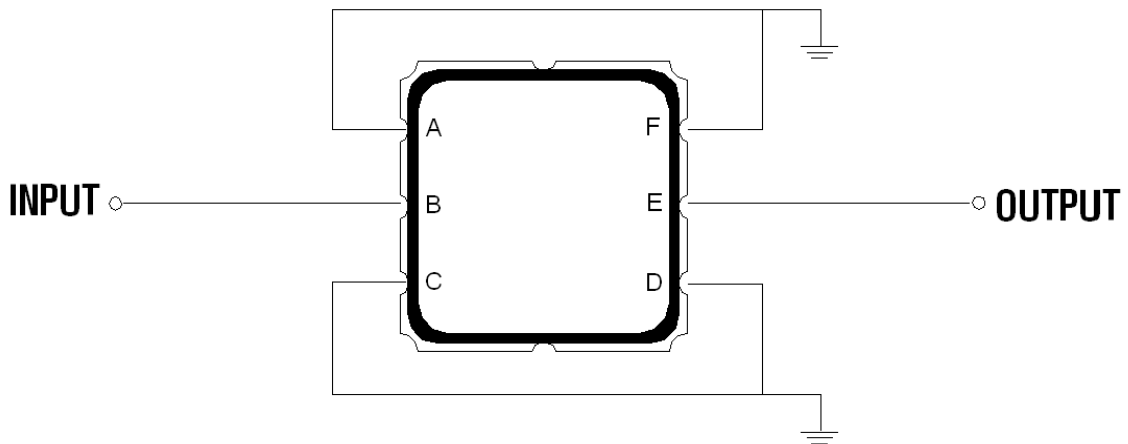

Source & Load Impedance: 50 Ω



**ANATECH ELECTRONICS INC**  
RF & Microwave Filters & Products

# 422 MHz SAW Bandpass Filter

Part Number: **AM422S1121**

