

Data Sheet

Description


The MSA-1120 is a high performance silicon bipolar Monolithic Microwave Integrated Circuit (MMIC) housed in a hermetic BeO disk package for good thermal characteristics. This MMIC is designed for high dynamic range in either 50 or 75 Ω systems by combining low noise figure with high IP_3 . Typical applications include narrow and broadband linear amplifiers in industrial and military systems.

The MSA-series is fabricated using Avago's 10 GHz f_T , 25 GHz f_{MAX} silicon bipolar MMIC process which uses nitride self-alignment, ion implantation, and gold metallization to achieve excellent performance, uniformity and reliability. The use of an external bias resistor for temperature and current stability also allows bias flexibility.


Features

- High Dynamic Range Cascadable 50 Ω or 75 Ω Gain Block
- 3 dB Bandwidth: 50 MHz to 1.6 GHz
- 17.5 dBm Typical P1 dB at 0.5 GHz
- 12 dB Typical 50 Ω Gain at 0.5 GHz
- 3.5 dB Typical Noise Figure at 0.5 GHz
- Hermetic Metal/ Beryllia Microstrip Package

200 mil BeO Package



Typical Biasing Configuration

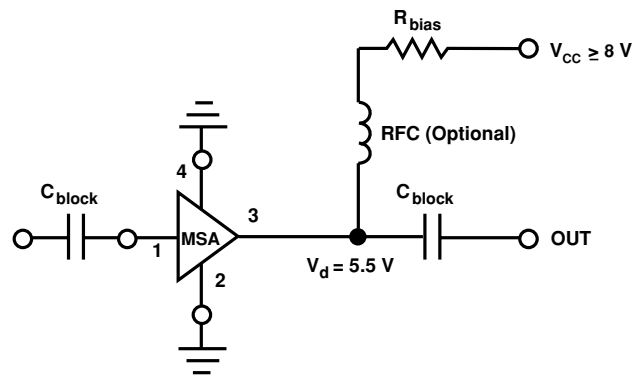

MSA-1120 Absolute Maximum Ratings

| Parameter | Absolute Maximum ^[1] |
|------------------------------------|---------------------------------|
| Device Current | 100 mA |
| Power Dissipation ^[2,3] | 650 mW |
| RF Input Power | +13 dBm |
| Junction Temperature | 200°C |
| Storage Temperature | -65 to 200°C |

Thermal Resistance^[2,4]:

$$\theta_{jc} = 60^{\circ}\text{C/W}$$

Notes:

1. Permanent damage may occur if any of these limits are exceeded.
2. $T_{\text{CASE}} = 25^{\circ}\text{C}$.
3. Derate at $16.7 \text{ mW}/^{\circ}\text{C}$ for $T_{\text{C}} > 161^{\circ}\text{C}$.
4. The small spot size of this technique results in a higher, though more accurate determination of θ_{jc} than do alternate methods.

Electrical Specifications^[1], $T_{\text{A}} = 25^{\circ}\text{C}$

| Symbol | Parameters and Test Conditions: $I_{\text{d}} = 60 \text{ mA}$, $Z_0 = 50 \Omega$ | Units | Min. | Typ. | Max. |
|-----------------------|--|------------------------------|------|-----------|-----------|
| G_{p} | Power Gain ($ S_{21} ^2$) $f = 0.1 \text{ GHz}$ | dB | 11.5 | 12.5 | 13.5 |
| ΔG_{p} | Gain Flatness $f = 0.1 \text{ to } 1.0 \text{ GHz}$ | dB | | ± 0.7 | ± 1.0 |
| $f_{3 \text{ dB}}$ | 3 dB Bandwidth ^[2] | GHz | | 1.6 | |
| VSWR | Input VSWR $f = 0.1 \text{ to } 1.5 \text{ GHz}$ | | | 1.7:1 | |
| | Output VSWR $f = 0.1 \text{ to } 1.5 \text{ GHz}$ | | | 1.9:1 | |
| NF | 50 Ω Noise Figure $f = 0.5 \text{ GHz}$ | dB | | 3.5 | 4.5 |
| $P_{1 \text{ dB}}$ | Output Power at 1 dB Gain Compression $f = 0.5 \text{ GHz}$ | dBm | 16.0 | 17.5 | |
| IP_3 | Third Order Intercept Point $f = 0.5 \text{ GHz}$ | dBm | | 30.0 | |
| t_{D} | Group Delay $f = 0.5 \text{ GHz}$ | psec | | 200 | |
| V_{d} | Device Voltage | V | 4.5 | 5.5 | 6.5 |
| dV/dT | Device Voltage Temperature Coefficient | $\text{mV}/^{\circ}\text{C}$ | | -8.0 | |

Notes:

1. The recommended operating current range for this device is 40 to 75 mA. Typical performance as a function of current is on the following page.
2. Referenced from 50 MHz gain (GP).

MSA-1120 Typical Scattering Parameters ($Z_0 = 50 \Omega$, $T_A = 25^\circ\text{C}$, $I_d = 60 \text{ mA}$)

| Freq. GHz | S_{11} | | | S_{21} | | | S_{12} | | | S_{22} | | | k |
|-----------|----------|------|------|----------|-----|-------|----------|-----|----|----------|------|----|------|
| | Mag | Ang | dB | Mag | Ang | dB | Mag | Ang | dB | Mag | Ang | dB | |
| .0005 | .78 | -21 | 19.6 | 9.53 | 168 | -25.1 | .057 | 50 | | .79 | -21 | | 0.51 |
| .005 | .19 | -72 | 13.8 | 4.91 | 165 | -16.8 | .144 | 11 | | .19 | -72 | | 0.98 |
| .025 | .05 | -56 | 12.9 | 4.44 | 174 | -16.5 | .149 | 3 | | .06 | -75 | | 1.08 |
| .050 | .04 | -52 | 12.5 | 4.23 | 174 | -16.1 | .156 | 2 | | .04 | -79 | | 1.08 |
| .100 | .04 | -56 | 12.5 | 4.22 | 172 | -16.2 | .155 | 1 | | .04 | -78 | | 1.09 |
| .200 | .05 | -72 | 12.4 | 4.19 | 165 | -16.1 | .157 | 1 | | .06 | -91 | | 1.08 |
| .300 | .07 | -84 | 12.4 | 4.15 | 158 | -16.0 | .159 | 2 | | .09 | -101 | | 1.07 |
| .400 | .09 | -96 | 12.3 | 4.10 | 151 | -15.9 | .161 | 2 | | .11 | -109 | | 1.06 |
| .500 | .10 | -105 | 12.1 | 4.04 | 144 | -15.8 | .163 | 3 | | .13 | -117 | | 1.05 |
| .600 | .12 | -113 | 12.0 | 3.98 | 137 | -15.6 | .166 | 3 | | .16 | -124 | | 1.04 |
| .700 | .14 | -120 | 11.8 | 3.89 | 131 | -15.4 | .169 | 2 | | .18 | -130 | | 1.03 |
| .800 | .15 | -127 | 11.6 | 3.80 | 124 | -15.2 | .173 | 2 | | .20 | -136 | | 1.01 |
| .900 | .17 | -134 | 11.4 | 3.71 | 118 | -15.0 | .178 | 1 | | .22 | -142 | | 1.00 |
| 1.000 | .19 | -140 | 11.1 | 3.60 | 112 | -14.8 | .181 | 2 | | .24 | -148 | | 0.99 |
| 1.500 | .25 | -167 | 9.8 | 3.10 | 83 | -14.0 | .200 | -3 | | .31 | -174 | | 0.95 |
| 2.000 | .31 | 171 | 8.4 | 2.64 | 58 | -13.3 | .216 | -10 | | .35 | 163 | | 0.95 |
| 2.500 | .35 | 157 | 7.3 | 2.31 | 39 | -12.8 | .228 | -16 | | .36 | 148 | | 0.96 |
| 3.000 | .40 | 140 | 6.1 | 2.02 | 19 | -12.5 | .236 | -23 | | .36 | 134 | | 0.99 |

Typical Performance, $T_A = 25^\circ\text{C}$, $Z_0 = 50 \Omega$

(unless otherwise noted)

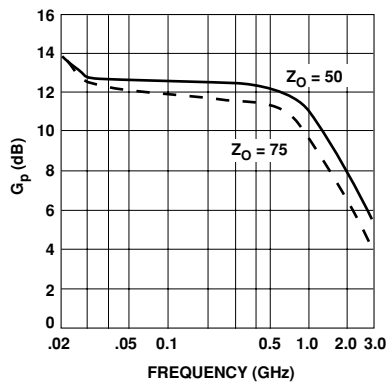


Figure 1. Typical Power Gain vs. Frequency, $I_d = 60 \text{ mA}$.

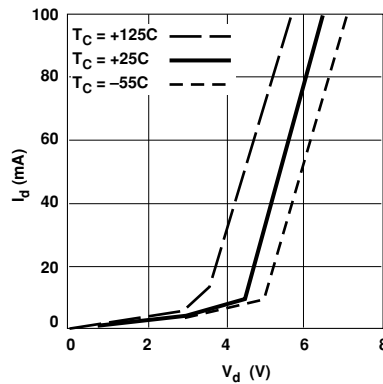


Figure 2. Device Current vs. Voltage.

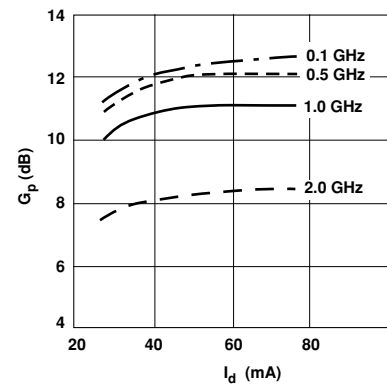


Figure 3. Power Gain vs. Current.

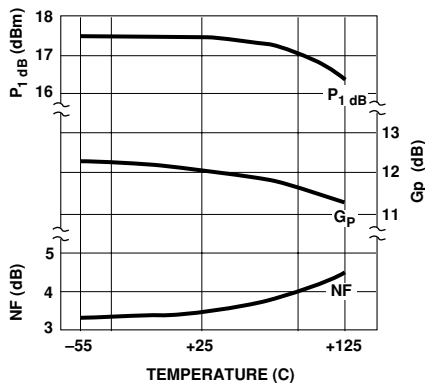


Figure 4. Output Power at 1 dB Gain Compression, Noise Figure and Power Gain vs. Case Temperature, $f = 0.5 \text{ GHz}$, $I_d = 60 \text{ mA}$.

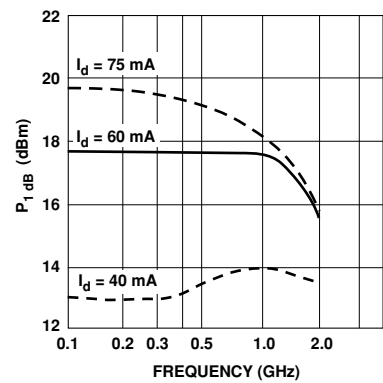


Figure 5. Output Power at 1 dB Gain Compression vs. Frequency.


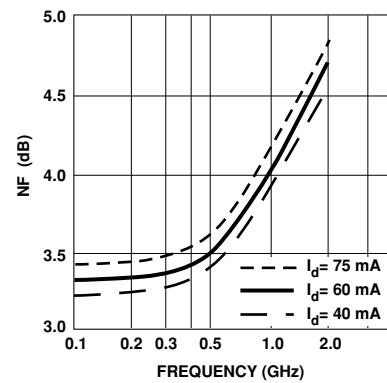


Figure 6. Noise Figure vs. Frequency.

Ordering Information

| Part Numbers | No. of Devices | Comments |
|--------------|----------------|----------|
| MSA-1120 | 100 | Bulk |

200 mil BeO Package Dimensions

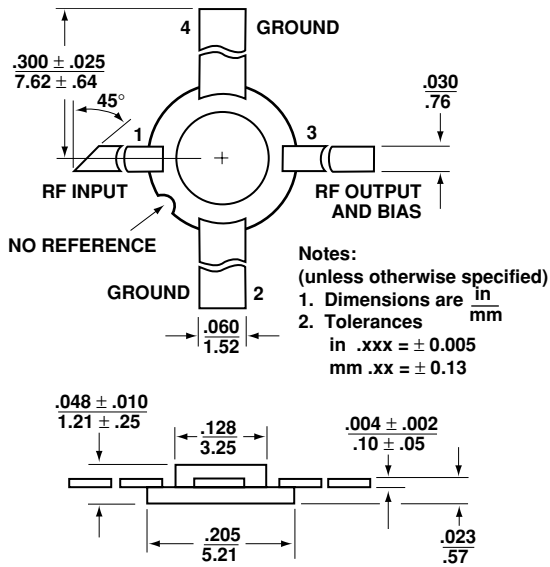

For product information and a complete list of distributors, please go to our web site: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies, Limited in the United States and other countries. Data subject to change. Copyright © 2008 Avago Technologies, Limited. All rights reserved. Obsoletes 5989-2748EN AV02-1234EN May 14, 2008

AVAGO
TECHNOLOGIES