


Fuse terminals

with fault indicator

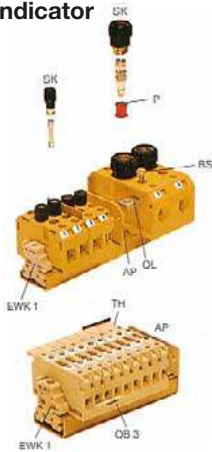

Dimensions/approvals

Width/length/height (mm)	with TS 32
Width/length/height (mm)	with TS 35 x 7.5
Terminal width (+ 0.2 assembly tolerance)	mm
Insulation stripping length/clamping screw/screwdriver blade	

Connection data

Screw connection, solid
Screw connection, flexible
Conductor cross-section

Further technical data

Tightening torque range	Nm
Torque setting with electric screwdriver type DMS 2	

VDE rated data

Voltage/current	-/10 A
LED-current (24...60 V)	≤ 5 mA
LED-current (115...230 V)	
Incandescent lamp-current	≤ 50 mA
Neon lamp-current	≤ 0.5 mA
Cross-section	10 mm ²

Ordering data


	Voltage	Qty.
Fuse insert		
5 x 20	LED	24 V~
Acc. to IEC 60127-2 (VDE 0820 T.2 BI 1)		24 V~
without indicator		48 V~
		48 V~
	Incandescent lamp	24 V=
		48 V=
	Neon lamp	115 V=
		230 V=
Fuse insert		
5 x 25	LED	24 V~
Acc. to DIN 41576		
without indicator	Incandescent lamp	48 V=
	Neon lamp	115 V=
		230 V=

Accessories

Mounting rail	
End brackets (thickness mm)	for TS 32
	for TS 35
End plate (thickness mm)	
Cross-connection	
Type 'QL'	
Cross-connection	
Type 'QB'	
Fixing screw (fits QL)	
Screw cap (spare)	
Neon lamp	

SAKS 1

Fuse insert 5x20/5x25



Warning:

In the event of a faulty fuse, the connection system is live!

UL	
13	
12	
0.5...16 mm ²	
0.5...10 mm ²	
AWG 20...8	


1.2...2.4	
4	

-/10 A	
≤ 5 mA	
≤ 50 mA	
≤ 0.5 mA	
10 mm ²	

Type	Cat. No.	Qty.
SAKS 1 LD		
	0371420000	10
	0225820000	10
	1111220000	10
	11111320000	10
	0214020000	10
SAKS 1 GL		
	0173220000	10
	0378920000	10
SAKS 1 GL		
	0385320000	10
	8068330000	10
	0306120000	10
	0199920000	10
SAK 1 LD		
	on demand	
SAKS GL		
	on demand	
SAKS 1 GL		
	0309320000	10
	0198620000	10

SAKS 4

Fuse insert E14/D 01
(e.g. Neozed D 01)



Warning:

In the event of a faulty fuse, the connection system is live!

24	
14	
0.5...16 mm ²	
0.5...10 mm ²	
AWG 20...7	


1.2...2.4	
4	

-/16 A	
≤ 1 mA	
≤ 1 mA	
≤ 1 mA	
10 mm ²	

Type	Cat. No.	Qty.
SAKS 4		
TS 32 Neon lamp		
Voltage		
115 V=	0101820000	10
480 V=	0102120000	10

SAKS 6

Fuse insert 11/4" x 1/4"
acc. to DEF 63



Warning:

In the event of a faulty fuse, the connection system is live!

UL	
12	
12	
0.5...16 mm ²	
0.5...10 mm ²	
AWG 20...8	


1.2...2.4	
4	

500 V~/10 A	
10 A	
≤ 1 mA	
≤ 1 mA	
≤ 1 mA	
10 mm ²	

Type	Cat. No.	Qty.
SAKS 6 KrG	0531820000	40
for 1 1/4" x 1/4" acc. to DEF 63		
Voltage		
115 V=	0101820000	10
480 V=	0102120000	10
exchangeable neon lamps (please order separately)		

SAKS 7

Fuse insert 5x20/5x25



Warning:

In the event of a faulty fuse, the connection system is live!

UL	
12	
12	
0.5...16 mm ²	
0.5...10 mm ²	
AWG 20...8	

1.2...2.4	
4	

500 V~/10 A	
10 A	
≤ 1 mA	
≤ 1 mA	
≤ 1 mA	
10 mm ²	

Type	Cat. No.	Qty.
SAKS 7 KrG		
for 5 x 25	0576120000	40
SAKS 7 KrG		
for 5 x 20	0573120000	40
exchangeable neon lamps (please order separately)		