


DirectFET™ Power MOSFET ②

Typical values (unless otherwise specified)

$V_{DSS}$	$V_{GS}$	$R_{DS(on)}$	$R_{DS(on)}$
40V max	$\pm 20V$ max	3.7mΩ@ 10V	4.6mΩ@ 4.5V
$Q_g \text{ tot}$	$Q_{gd}$	$Q_{gs2}$	$Q_{rr}$
29nC	9.4nC	2.4nC	33nC
$Q_{oss}$	$V_{gs(th)}$		
15nC	1.8V		



Applicable DirectFET Outline and Substrate Outline (see p.7,8 for details) ①

SQ	SX	ST		MQ	MX	MT	MP		
----	----	----	--	----	----	----	----	--	--

## Description

The IRF6616 combines the latest HEXFET® Power MOSFET Silicon technology with the advanced DirectFET™ packaging to achieve low combined on-state and switching loss in a package that has the footprint area of an SO-8 and only 0.7mm profile. The DirectFET package is compatible with existing layout geometries used in power applications, PCB assembly equipment and vapor phase, infra-red or convection soldering techniques, when application note AN-1035 is followed regarding the manufacturing methods and processes. The DirectFET package allows dual sided cooling to maximize thermal transfer in power systems, improving previous best thermal resistance by 80%.

The IRF6616 balances both low resistance and low charge along with ultra low package inductance to reduce both conduction and switching losses. The reduced total losses make this product ideal for high efficiency DC-DC converters that power the latest generation of processors operating at higher frequencies. The IRF6616 is ideal for secondary side synchronous rectification applications up to 100W, and can also be used in some non-isolated synchronous buck applications where 30V devices do not provide enough voltage headroom.

## Absolute Maximum Ratings

	Parameter	Max.	Units
$V_{DS}$	Drain-to-Source Voltage	40	V
$V_{GS}$	Gate-to-Source Voltage	$\pm 20$	
$I_D @ T_A = 25^\circ\text{C}$	Continuous Drain Current, $V_{GS} @ 10V$ ③	19	A
$I_D @ T_A = 70^\circ\text{C}$	Continuous Drain Current, $V_{GS} @ 10V$ ③	15	
$I_D @ T_C = 25^\circ\text{C}$	Continuous Drain Current, $V_{GS} @ 10V$ ④	106	
$I_{DM}$	Pulsed Drain Current ⑤	150	
$E_{AS}$	Single Pulse Avalanche Energy ⑥	36	mJ
$I_{AR}$	Avalanche Current ⑤	15	A

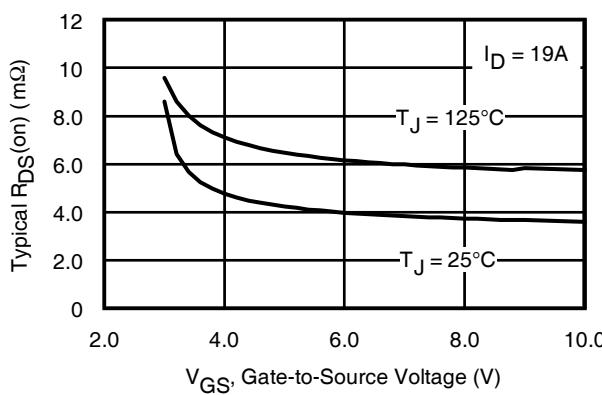


Fig 1. Typical On-Resistance vs. Gate Voltage

Notes:

- ① Click on this section to link to the appropriate technical paper.
- ② Click on this section to link to the DirectFET Website.
- ③ Surface mounted on 1 in. square Cu board, steady state.

[www.irf.com](http://www.irf.com)

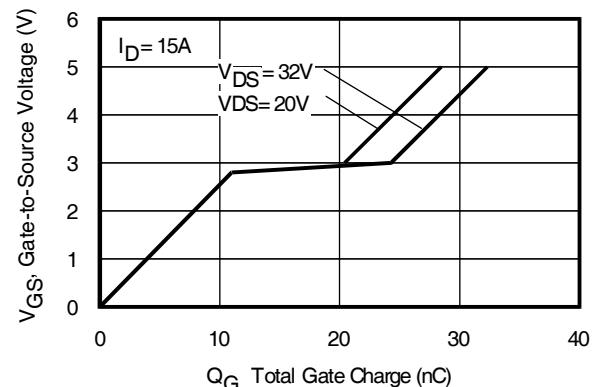


Fig 2. Typical Total Gate Charge vs Gate-to-Source Voltage

④  $T_C$  measured with thermocouple mounted to top (Drain) of part.

⑤ Repetitive rating; pulse width limited by max. junction temperature.

⑥ Starting  $T_J = 25^\circ\text{C}$ ,  $L = 0.32\text{mH}$ ,  $R_G = 25\Omega$ ,  $I_{AS} = 15\text{A}$ .

Static @  $T_J = 25^\circ\text{C}$  (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
$BV_{DSS}$	Drain-to-Source Breakdown Voltage	40	—	—	V	$V_{GS} = 0\text{V}, I_D = 250\mu\text{A}$
$\Delta BV_{DSS}/\Delta T_J$	Breakdown Voltage Temp. Coefficient	—	37	—	mV/ $^\circ\text{C}$	Reference to $25^\circ\text{C}, I_D = 1\text{mA}$
$R_{DS(on)}$	Static Drain-to-Source On-Resistance	—	3.7	5.0	$\text{m}\Omega$	$V_{GS} = 10\text{V}, I_D = 19\text{A}$ ①
		—	4.6	6.2		$V_{GS} = 4.5\text{V}, I_D = 15\text{A}$ ①
$V_{GS(th)}$	Gate Threshold Voltage	1.35	1.8	2.25	V	$V_{DS} = V_{GS}, I_D = 250\mu\text{A}$
$\Delta V_{GS(th)}/\Delta T_J$	Gate Threshold Voltage Coefficient	—	-5.5	—	mV/ $^\circ\text{C}$	
$I_{DSS}$	Drain-to-Source Leakage Current	—	—	1.0	$\mu\text{A}$	$V_{DS} = 32\text{V}, V_{GS} = 0\text{V}$
		—	—	150		$V_{DS} = 32\text{V}, V_{GS} = 0\text{V}, T_J = 125^\circ\text{C}$
$I_{GSS}$	Gate-to-Source Forward Leakage	—	—	100	$\text{nA}$	$V_{GS} = 20\text{V}$
	Gate-to-Source Reverse Leakage	—	—	-100		$V_{GS} = -20\text{V}$
$g_{fs}$	Forward Transconductance	75	—	—	S	$V_{DS} = 20\text{V}, I_D = 15\text{A}$
$Q_g$	Total Gate Charge	—	29	44	$\text{nC}$	$V_{DS} = 20\text{V}$ $V_{GS} = 4.5\text{V}$ $I_D = 15\text{A}$ See Fig. 15
$Q_{gs1}$	Pre-V <sub>th</sub> Gate-to-Source Charge	—	8.6	—		
$Q_{gs2}$	Post-V <sub>th</sub> Gate-to-Source Charge	—	2.4	—		
$Q_{gd}$	Gate-to-Drain Charge	—	9.4	—		
$Q_{godr}$	Gate Charge Overdrive	—	8.6	—		
$Q_{sw}$	Switch Charge ( $Q_{gs2} + Q_{gd}$ )	—	12	—	$\text{pF}$	$V_{GS} = 0\text{V}$ $V_{DS} = 20\text{V}$ $f = 1.0\text{MHz}$
$Q_{oss}$	Output Charge	—	15	—		
$R_G$	Gate Resistance	—	1.3	—		
$t_{d(on)}$	Turn-On Delay Time	—	15	—	$\text{ns}$	$V_{DD} = 16\text{V}, V_{GS} = 4.5\text{V}$ ① $I_D = 15\text{A}$ Clamped Inductive Load
$t_r$	Rise Time	—	19	—		
$t_{d(off)}$	Turn-Off Delay Time	—	21	—		
$t_f$	Fall Time	—	4.4	—		
$C_{iss}$	Input Capacitance	—	3765	—	$\text{pF}$	$V_{GS} = 0\text{V}$ $V_{DS} = 20\text{V}$ $f = 1.0\text{MHz}$
$C_{oss}$	Output Capacitance	—	560	—		
$C_{rss}$	Reverse Transfer Capacitance	—	285	—		

## Diode Characteristics

	Parameter	Min.	Typ.	Max.	Units	Conditions
$I_s$	Continuous Source Current (Body Diode)	—	—	110	$\text{A}$	MOSFET symbol showing the integral reverse p-n junction diode.
	Pulsed Source Current (Body Diode) ②	—	—	150		
$V_{SD}$	Diode Forward Voltage	—	0.8	1.0	V	$T_J = 25^\circ\text{C}, I_S = 15\text{A}, V_{GS} = 0\text{V}$ ①
$t_{rr}$	Reverse Recovery Time	—	15	23	ns	$T_J = 25^\circ\text{C}, I_F = 15\text{A}$
$Q_{rr}$	Reverse Recovery Charge	—	33	50	nC	$dI/dt = 500\text{A}/\mu\text{s}$ ①

## Notes:

① Pulse width  $\leq 400\mu\text{s}$ ; duty cycle  $\leq 2\%$ .

② Repetitive rating; pulse width limited by max. junction temperature.

### Absolute Maximum Ratings

	Parameter	Max.	Units
P <sub>D</sub> @ T <sub>A</sub> = 25°C	Power Dissipation ①	2.8	W
P <sub>D</sub> @ T <sub>A</sub> = 70°C	Power Dissipation ①	1.8	
P <sub>D</sub> @ T <sub>C</sub> = 25°C	Power Dissipation ④	89	
T <sub>P</sub>	Peak Soldering Temperature	270	°C
T <sub>J</sub>	Operating Junction and Storage Temperature Range	-40 to + 150	
T <sub>STG</sub>			

### Thermal Resistance

	Parameter	Typ.	Max.	Units
R <sub>0JA</sub>	Junction-to-Ambient ①⑤	—	45	
R <sub>0JA</sub>	Junction-to-Ambient ②⑤	12.5	—	
R <sub>0JA</sub>	Junction-to-Ambient ③⑤	20	—	°C/W
R <sub>0JC</sub>	Junction-to-Case ④⑤	—	1.4	
R <sub>0J-PCB</sub>	Junction-to-PCB Mounted	1.0	—	
	Linear Derating Factor ①	0.022		W/°C

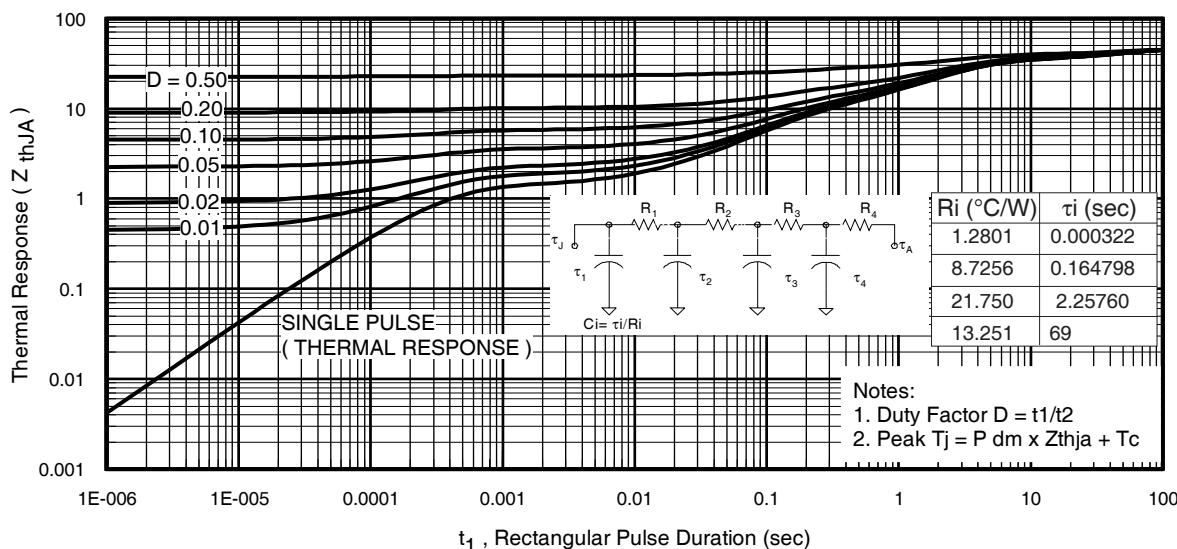


Fig 3. Maximum Effective Transient Thermal Impedance, Junction-to-Ambient


#### Notes:

- ① Surface mounted on 1 in. square Cu board, steady state.
- ② Used double sided cooling , mounting pad.
- ③ Mounted on minimum footprint full size board with metalized back and with small clip heatsink.

- ④  $T_c$  measured with thermocouple in contact with top (Drain) of part.
- ⑤  $R_0$  is measured at  $T_j$  of approximately 90°C.



① Surface mounted on 1 in. square Cu board (still air).

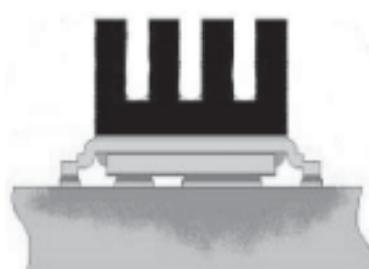


③ Mounted to a PCB with small clip heatsink (still air)




③ Mounted on minimum footprint full size board with metalized back and with small clip heatsink (still air)

# IRF6616PbF


International  
Rectifier

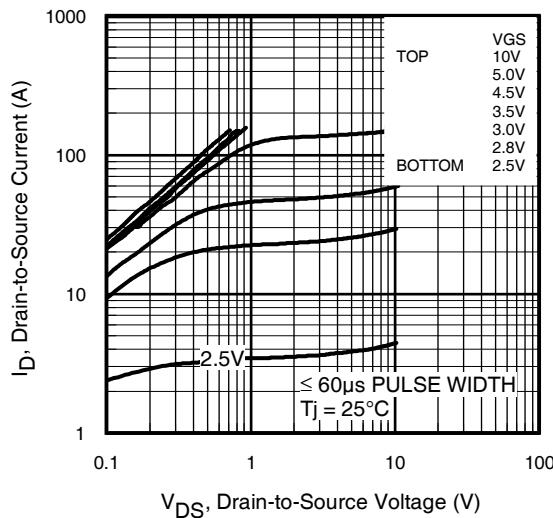


**Fig 4.** Typical Output Characteristics

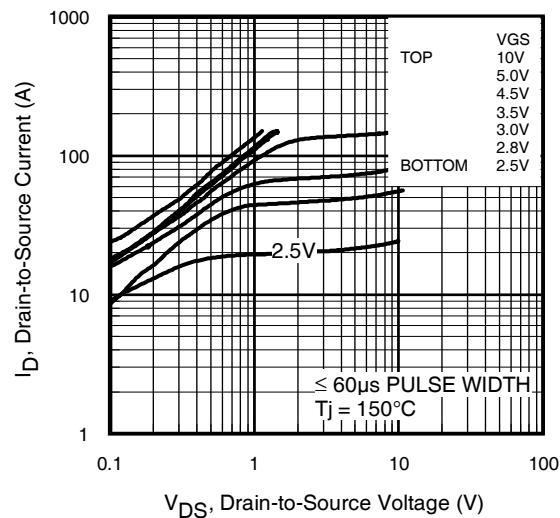


**Fig 5.** Typical Output Characteristics

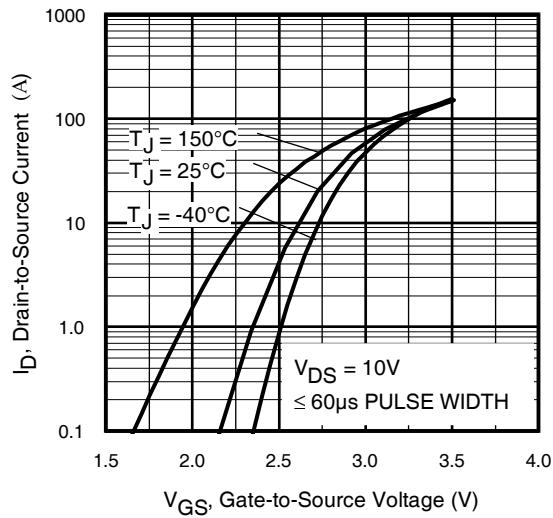


**Fig 6.** Typical Transfer Characteristics

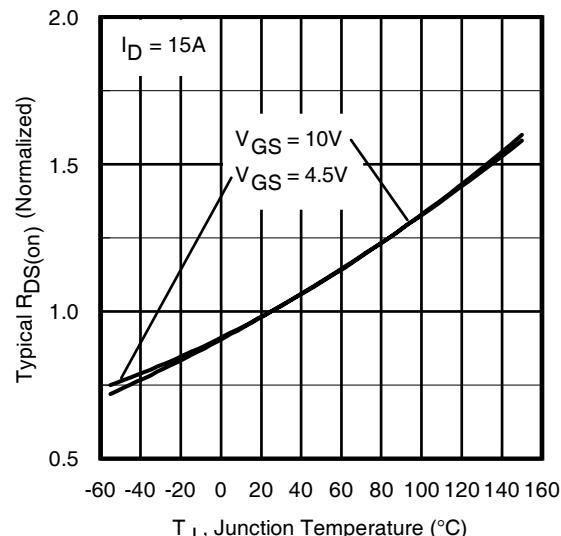


**Fig 7.** Normalized On-Resistance vs. Temperature

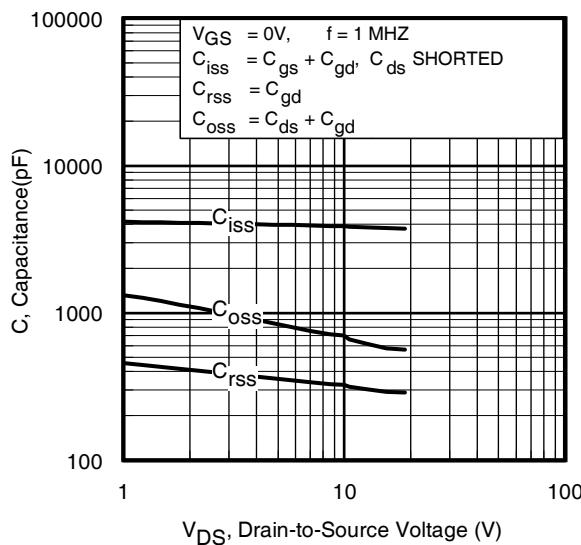


**Fig 8.** Typical Capacitance vs. Drain-to-Source Voltage

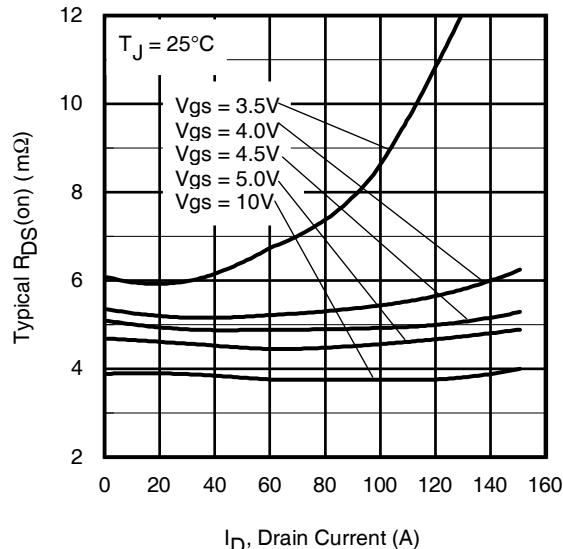


**Fig 9.** Typical On-Resistance vs. Drain Current and Gate Voltage

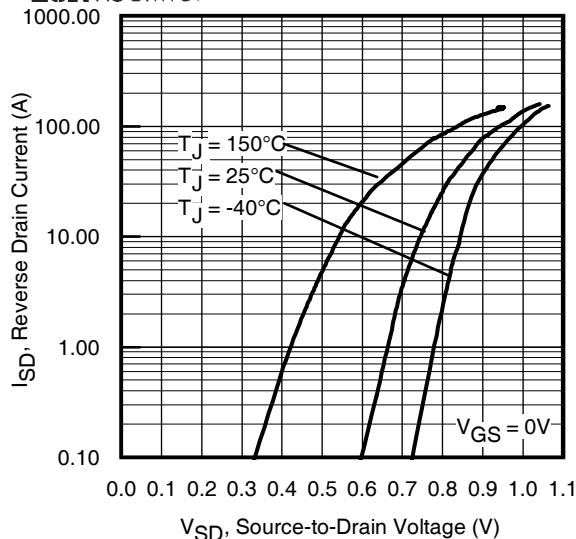


**Fig 10.** Typical Source-Drain Diode Forward Voltage

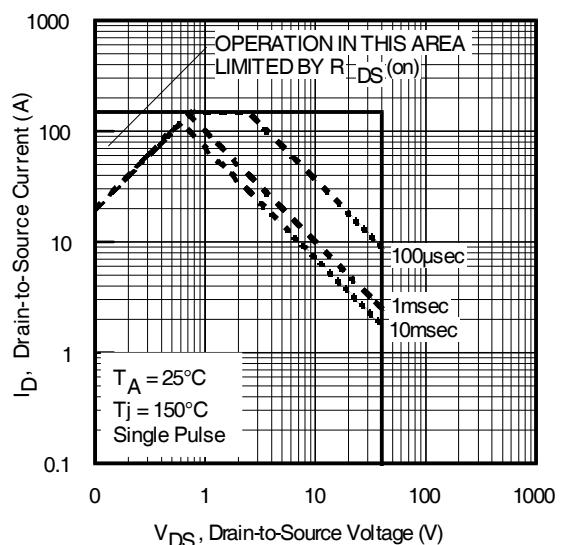


**Fig 11.** Maximum Safe Operating Area

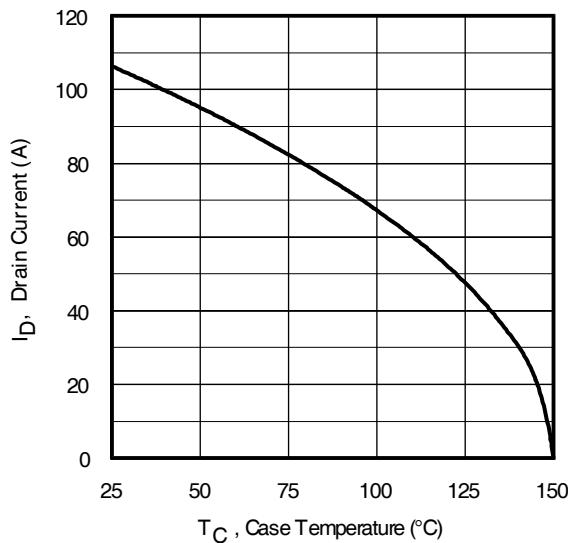

**Fig 12.** Maximum Drain Current vs. Case Temperature

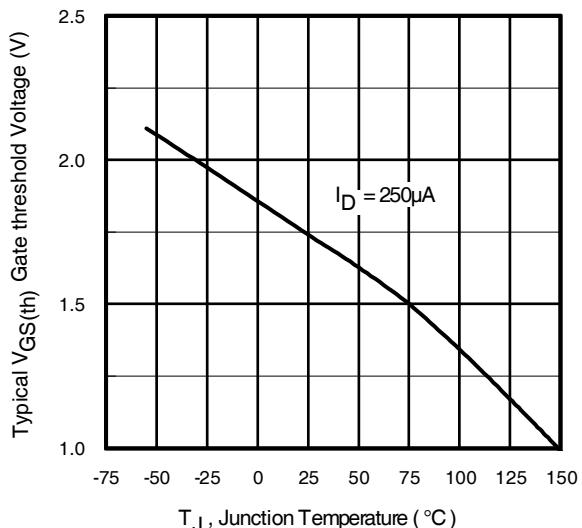

**Fig 13.** Typical Threshold Voltage vs. Junction Temperature

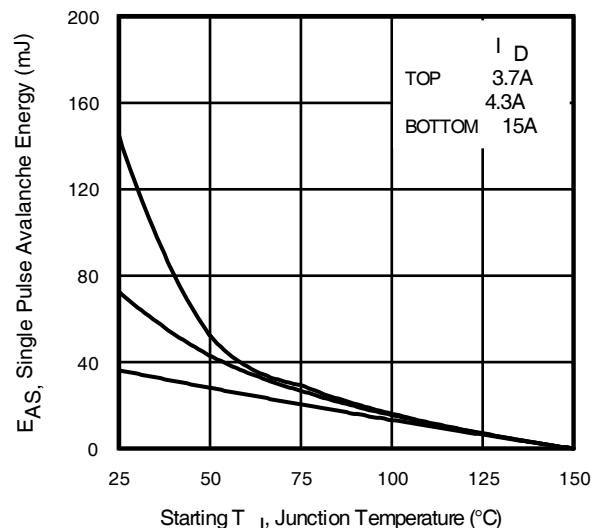

**Fig 14.** Maximum Avalanche Energy Vs. Drain Current

# IRF6616PbF

International  
Rectifier

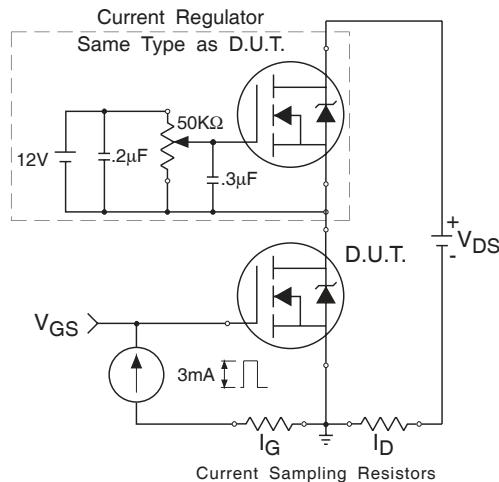


Fig 15a. Gate Charge Test Circuit

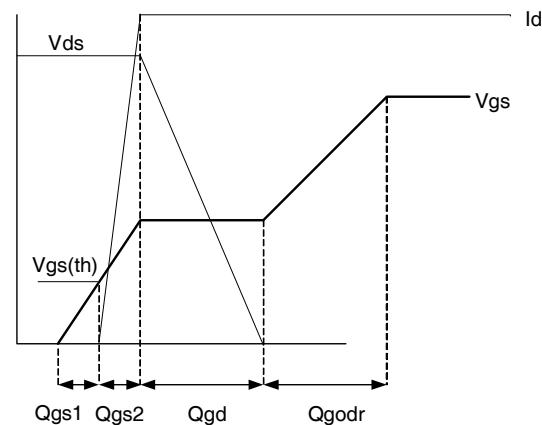


Fig 15b. Gate Charge Waveform

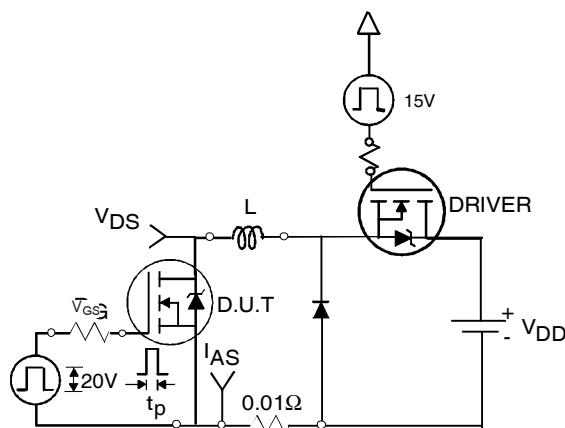


Fig 16a. Unclamped Inductive Test Circuit

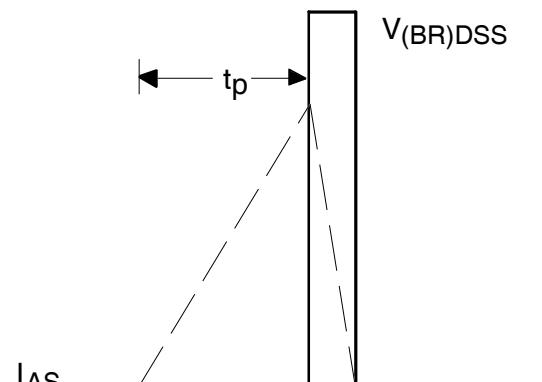


Fig 16b. Unclamped Inductive Waveforms

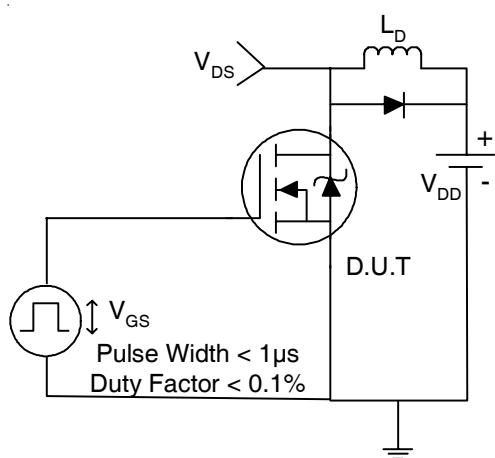


Fig 17a. Switching Time Test Circuit


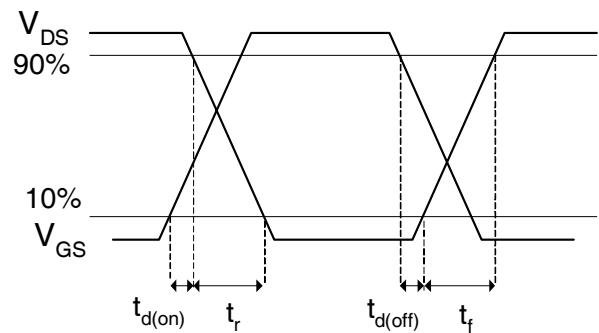



Fig 17b. Switching Time Waveforms

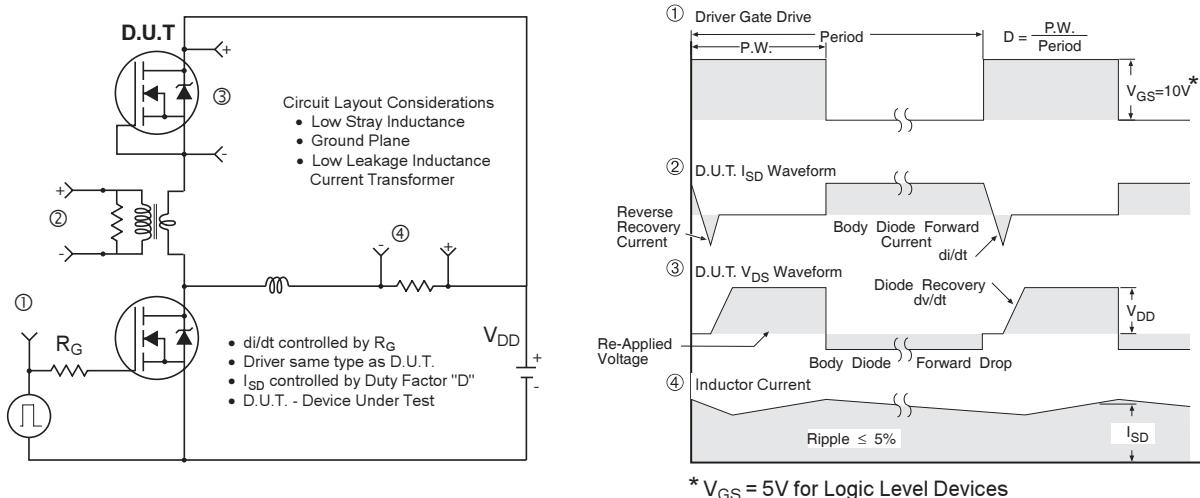

**Fig 18.** Diode Reverse Recovery Test Circuit for N-Channel HEXFET® Power MOSFETs

### DirectFET™ Board Footprint, MX Outline (Medium Size Can, X-Designation).

Please see DirectFET application note AN-1035 for all details regarding the assembly of DirectFET. This includes all recommendations for stencil and substrate designs.

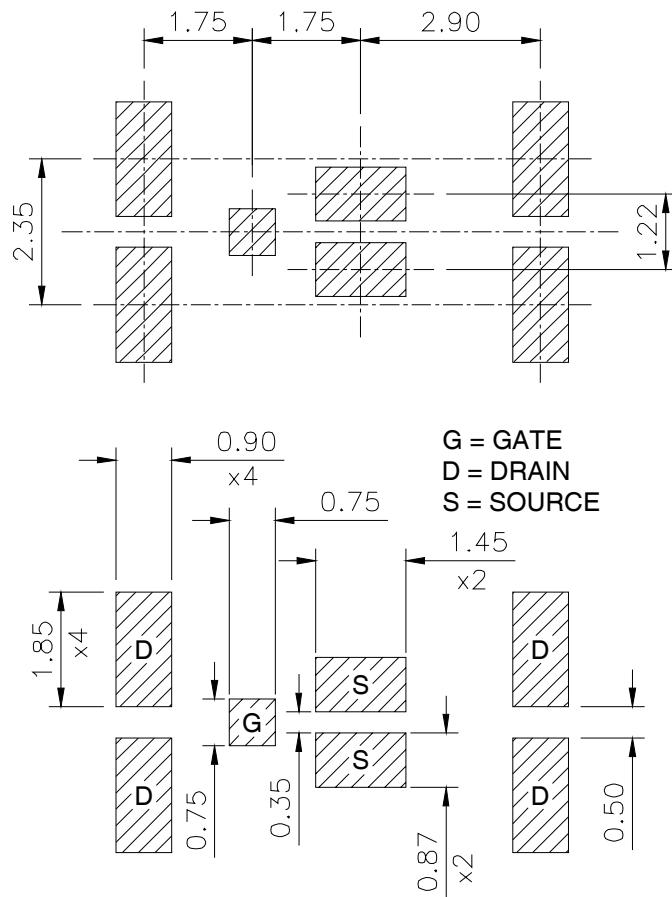


# IRF6616PbF

International  
**IR** Rectifier


## DirectFET™ Outline Dimension, MX Outline (Medium Size Can, X-Designation).

Please see DirectFET application note AN-1035 for all details regarding the assembly of DirectFET.

This includes all recommendations for stencil and substrate designs.

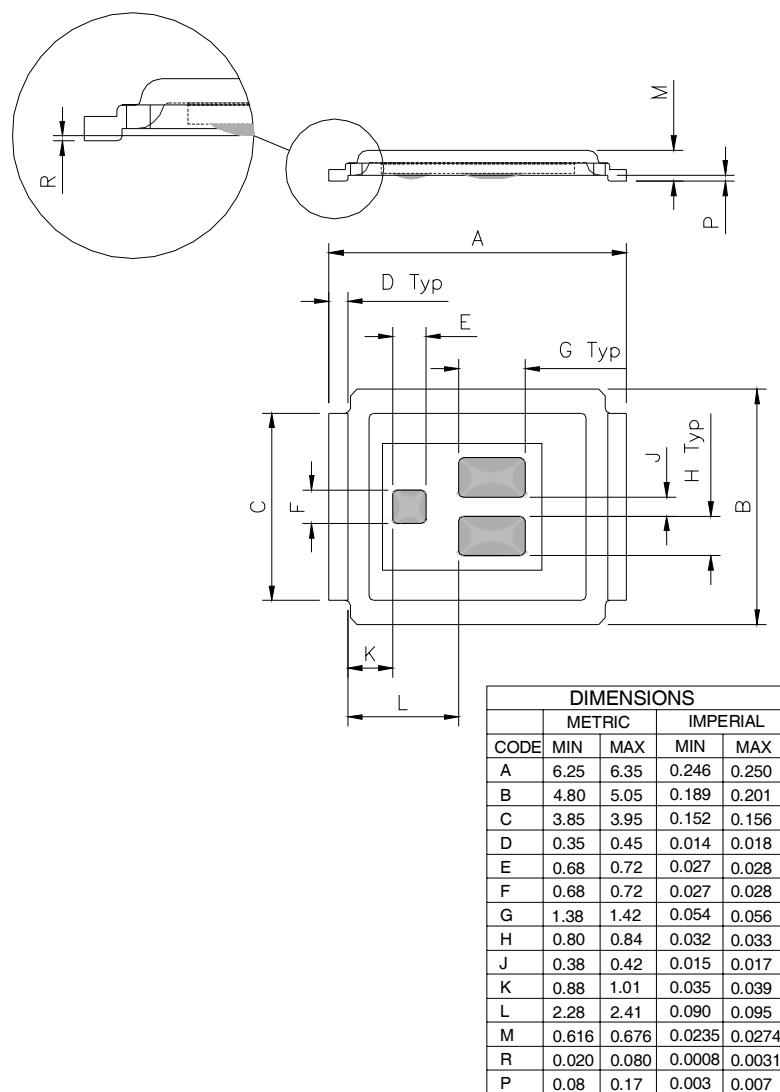


## DirectFET™ Part Marking

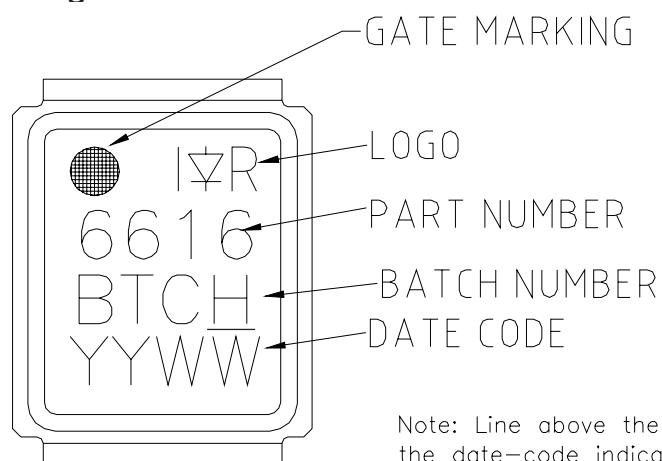

Note: Line above the last character of the date-code indicates "Lead-Free".


**DirectFET™ Tape & Reel Dimension**  
(Showing component orientation).

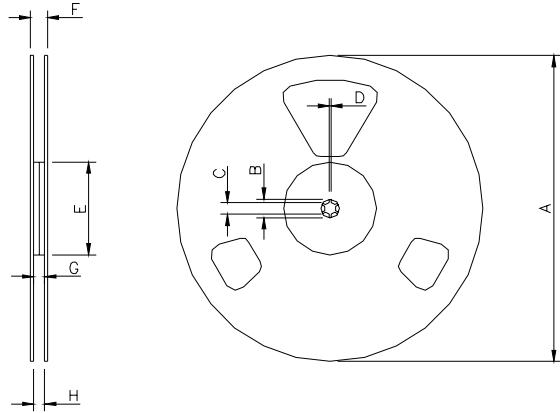

NOTE: Controlling dimensions in mm  
Std reel quantity is 4800 parts. (ordered as IRF6616) For 1000 parts on 7" reel,  
order IRF6616TR1PbF

REEL DIMENSIONS								
STANDARD OPTION (QTY 4800)				TR1 OPTION (QTY 1000)				
CODE	METRIC	MIN	MAX	IMPERIAL	METRIC	MIN	MAX	
A	330.0	N.C.	12.992	N.C.	177.77	N.C.	6.9	N.C.
B	20.2	N.C.	0.795	N.C.	19.06	N.C.	0.75	N.C.
C	12.8	13.2	0.504	0.520	13.5	12.8	0.53	0.50
D	1.5	N.C.	0.059	N.C.	1.5	N.C.	0.059	N.C.
E	100.0	N.C.	3.937	N.C.	58.72	N.C.	2.31	N.C.
F	N.C.	18.4	N.C.	0.724	N.C.	13.50	N.C.	0.53
G	12.4	14.4	0.488	0.567	11.9	12.01	0.47	N.C.
H	11.9	15.4	0.469	0.606	11.9	12.01	0.47	N.C.

LOADED TAPE FEED DIRECTION

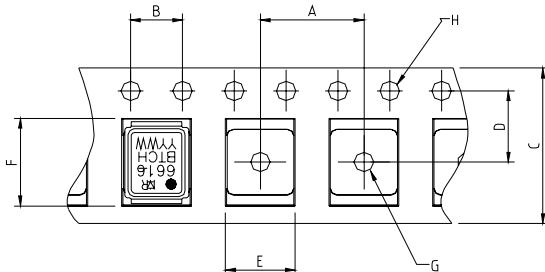

NOTE: CONTROLLING DIMENSIONS IN MM

DIMENSIONS							
CODE	METRIC	MIN	MAX	IMPERIAL	METRIC	MIN	MAX
A	7.90	8.10	0.311	0.319			
B	3.90	4.10	0.154	0.161			
C	11.90	12.30	0.469	0.484			
D	5.45	5.55	0.215	0.219			
E	5.10	5.30	0.201	0.209			
F	6.50	6.70	0.256	0.264			
G	1.50	N.C.	0.059	N.C.			
H	1.50	1.60	0.059	0.063			

Note: For the most current drawing please refer to IR website at <http://www.irf.com/package/pkhexfet.html>

Data and specifications subject to change without notice.

This product has been designed and qualified for the Consumer market.

Qualification Standards can be found on IR's Web site.

International  
**IR** Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105

TAC Fax: (310) 252-7903

Visit us at [www.irf.com](http://www.irf.com) for sales contact information.05/2007

Note: For the most current drawings please refer to the IR website at:  
<http://www.irf.com/package/>

## **IMPORTANT NOTICE**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office ([www.infineon.com](http://www.infineon.com)).

## **WARNINGS**

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.