



## PHOTOTRANSISTOR OPTICAL **INTERRUPTER SWITCH**

# **QRC1113**

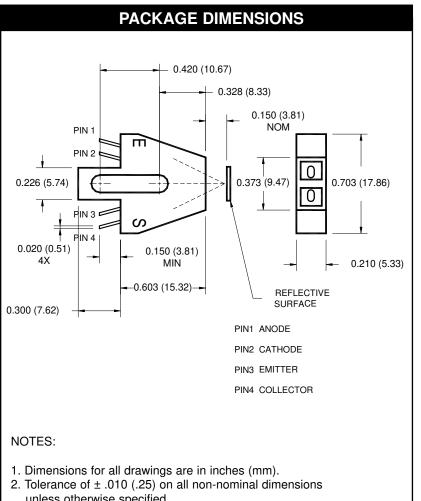

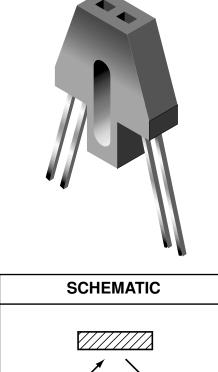

unless otherwise specified.

### DESCRIPTION

The QRC1113 consists of an infrared emitting diode and an NPN silicon phototransistor mounted side by side on a converging optical axis in a black plastic housing. The phototransistor responds to radiation from the emitting diode only when a reflective object passes within its field of view. The area of the optimum response approximates a circle .200" in diameter.

### **FEATURES**

- · Phototransistor output
- · High sensitivity
- · Low cost plastic housing

Δ

# PHOTOTRANSISTOR OPTICAL INTERRUPTER SWITCH

# QRC1113

ABSOLUTE MAXIMUM RATINGS (T <sub>A</sub> = 25°C unless otherwise specified)							
Parameter	Symbol	Rating	Units				
Operating Temperature	T <sub>OPR</sub>	-40 to +85	°C				
Storage Temperature	T <sub>STG</sub>	-40 to +85	°C				
Soldering Temperature (Iron) <sup>(2,3,4)</sup>	T <sub>SOL-I</sub>	240 for 5 sec	°C				
Soldering Temperature (Flow) <sup>(2,3)</sup>	T <sub>SOL-F</sub>	260 for 10 sec	°C				
EMITTER							
Continuous Forward Current	I <sub>F</sub>	50	mA				
Reverse Voltage	V <sub>R</sub>	5	V				
Power Dissipation <sup>(1)</sup>	PD	100	mW				
SENSOR							
Collector-Emitter Voltage	V <sub>CEO</sub>	30	V				
Emitter-Collector Voltage	V <sub>ECO</sub>	5	V				
Collector Current	Ι <sub>C</sub>	20	mA				
Power Dissipation(1)	P <sub>D</sub>	100	mW				

#### NOTES

L

1. Derate power dissipation linearly 1.67 mW/°C above 25°C.

2. RMA flux is recommended.

3. Methanol or isopropyl alcohols are recommended as cleaning agents.

4. Soldering iron 1/16" (1.6mm) minimum from housing.

5. D is the distance from the assembly face to the reflective surface.

6. Cross talk is the photo current measured with current to the input diode and no reflecting surface.

7. Measured using an Eastman Kodak neutral test card with 90% diffused reflecting surface.

## ELECTRICAL / OPTICAL CHARACTERISTICS (T<sub>A</sub> = 25°C)


PARAMETER	TEST CONDITIONS	SYMBOL	MIN	ТҮР	МАХ	UNITS
EMITTER		.,				
Forward Voltage	I <sub>F</sub> = 40 mA	$V_{F}$	—	—	1.7	V
Reverse Current	V <sub>R</sub> = 2.0 V	I <sub>R</sub>	_		100	μA
Peak Emission Wavelength	l <sub>F</sub> = 20 mA	$\lambda_{PE}$	_	940		nm
SENSOR						
Collector-Emitter Breakdown Voltage	I <sub>C</sub> = 1 mA	BV <sub>CEO</sub>	30	—		V
Emitter-Collector Breakdown Voltage	I <sub>E</sub> = 0.1 mA	BV <sub>ECO</sub>	5	_		V
Collector-Emitter Dark Current	$V_{CE} = 10 \text{ V}, \text{ I}_{F} = 0 \text{ mA}$	I <sub>CEO</sub>	_		100	nA
COUPLED		I <sub>C(ON)</sub>	0.20	_	_	mA
On-state Collector Current	$I_{F}$ =40mA, $V_{CE}$ =5V,D =.150"(5,7)					
Collector-Emitter	$I_{\rm F} = 40$ mA, $I_{\rm C} = 0.1$ mA	V <sub>CE (SAT)</sub>	_	_	0.4	v
Saturation Voltage	D = .150" <sup>(5,7)</sup>					
Rise Time	$V_{CE}$ = 5 V, RL = 100 $\Omega$	t <sub>r</sub> — 8				
Fall Time	I <sub>C(ON)</sub> = 5 mA	t <sub>f</sub>	_	8	_	μs
Crosstalk	$I_F = 40 \text{ mA}, V_{CE} = 5 \text{ V}^{(6)}$	I <sub>CX</sub>	—	_	1.00	μA




## PHOTOTRANSISTOR OPTICAL INTERRUPTER SWITCH

# QRC1113

### TYPICAL PERFORMANCE CURVES

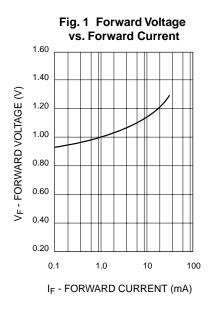

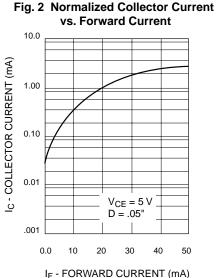


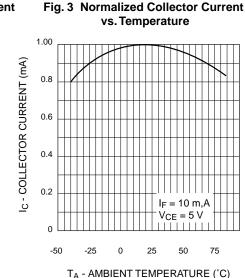


Fig. 4 Normalized Collector Dark Current vs. Temperature

0 25 50 75 100

T<sub>A</sub> - AMBIENT TEMPERATURE (°C)

Fig. 5 Normalized Collector Current vs. Distance

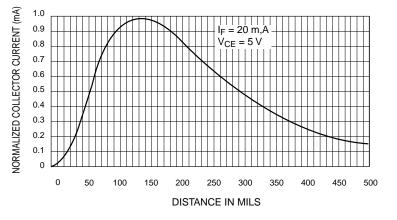

50 -25



SEMICONDUCTOR®

## PHOTOTRANSISTOR OPTICAL INTERRUPTER SWITCH

# QRC1113

#### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body,or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in labeling, can be reasonably expected to result in a significant injury of the user.
- 2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.