## **STTH6006W**

## Turbo 2 ultrafast - high voltage rectifier

Table 1. Main product characteristics

| I <sub>F(AV)</sub>    | 60 A   |
|-----------------------|--------|
| V <sub>RRM</sub>      | 600 V  |
| T <sub>j</sub>        | 175° C |
| V <sub>F</sub> (typ)  | 1.1 V  |
| t <sub>rr</sub> (max) | 60 ns  |

#### Features and benefits

- Ultrafast switching
- Low reverse current
- Low thermal resistance
- Reduces conduction and switching losses



The STTH6006W uses ST Turbo 2 600 V technology. This device is specially suited for use in switching power supplies, and industrial applications. The V $_{\rm F}$  /  $\rm T_{rr}$  trade-off has been specially established to increase the performance in welding applications.



Table 2. Order code

| Part number | Marking   |  |
|-------------|-----------|--|
| STTH6006W   | STTH6006W |  |

Table 3. Absolute ratings (limiting values per diode at 25° C, unless otherwise specified)

| Symbol              | Pa                                      | Parameter                         |     |   |
|---------------------|-----------------------------------------|-----------------------------------|-----|---|
| V <sub>RRM</sub>    | Repetitive peak reverse voltage         | 600                               | V   |   |
| I <sub>F(RMS)</sub> | RMS forward current                     | 90                                | Α   |   |
| I <sub>F(AV)</sub>  | Average forward current, $\delta = 0.5$ | T <sub>c</sub> = 95° C            | 60  | Α |
| I <sub>FSM</sub>    | Surge non repetitive forward current    | t <sub>p</sub> = 10 ms Sinusoidal | 400 | Α |
| T <sub>stg</sub>    | Storage temperature range               | -65 to + 175                      | °C  |   |
| T <sub>j</sub>      | Maximum operating junction tempera      | 175                               | °C  |   |

<sup>1.</sup>  $\frac{dP_{tot}}{dT_j} < \frac{1}{R_{th(j-a)}}$  to avoid thermal runaway for a diode on its own heatsink

Characteristics STTH6006W

## 1 Characteristics

Table 4. Thermal parameters

| Symbol               | Parameter        | Value | Unit |
|----------------------|------------------|-------|------|
| R <sub>th(j-c)</sub> | Junction to case | 0.75  | °C/W |

Table 5. Static electrical characteristics

| Symbol                        | Parameter                                             | Test conditions         |                       | Min. | Тур  | Max. | Unit |
|-------------------------------|-------------------------------------------------------|-------------------------|-----------------------|------|------|------|------|
| I <sub>B</sub> <sup>(1)</sup> | I <sub>B</sub> <sup>(1)</sup> Reverse leakage current |                         | V -V                  |      |      | 50   | μA   |
| 'R`                           | IR Prevense leakage culteril                          | T <sub>j</sub> = 125° C | $V_R = V_{RRM}$       |      | 160  | 1600 | μΛ   |
| V (2)                         | V <sub>F</sub> <sup>(2)</sup> Forward voltage drop    | T <sub>j</sub> = 25° C  | I <sub>F</sub> = 60 A |      |      | 1.85 | ٧    |
| VF`                           |                                                       | T <sub>j</sub> = 150° C | 1F = 00 A             |      | 1.10 | 1.40 | V    |

<sup>1.</sup> Pulse test:  $t_p = 5$  ms,  $\delta < 2$  %

To evaluate the conduction losses use the following equation:

$$P = 1.07 \times I_{F(AV)} + 0.006 I_{F}^{2}_{(RMS)}$$

Table 6. Dynamic characteristics

| Symbol                                | Parameter                                                                                                       | Test conditions                                                                                                           | Min. | Тур  | Max. | Unit |
|---------------------------------------|-----------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|------|------|------|------|
| +                                     | Rayarsa racayary tima                                                                                           | $I_F = 0.5 \text{ A}, I_{rr} = 0.25 \text{ A}, I_R = 1 \text{ A},$ $T_j = 25^{\circ} \text{ C}$                           |      |      | 60   | ns   |
| t <sub>rr</sub> Reverse recovery time | $I_F = 1 \text{ A, } dI_F/dt = -50 \text{ A/}\mu\text{s,}$<br>$V_R = 30 \text{ V, } T_j = 25^{\circ} \text{ C}$ |                                                                                                                           | 60   | 85   | 113  |      |
| I <sub>RM</sub>                       | Reverse recovery current                                                                                        | $I_F = 60 \text{ A}, dI_F/dt = -100 \text{ A/}\mu\text{s}, \ V_R = 400 \text{ V}, T_j = 150^{\circ} \text{ C}$            |      | 10.5 | 14   |      |
| t <sub>fr</sub>                       | Forward recovery time                                                                                           | $I_F = 60 \text{ A}$ $dI_F/dt = 200 \text{ A/}\mu\text{s}$ $V_{FR} = 1.1 \text{ x } V_{Fmax}, T_j = 25^{\circ} \text{ C}$ |      |      | 500  | ns   |
| V <sub>FP</sub>                       | Forward recovery voltage                                                                                        | $I_F = 60 \text{ A}$ $dI_F/dt = 200 \text{ A/}\mu\text{s}$ $V_{FR} = 1.1 \text{ x } V_{Fmax}, T_j = 25^{\circ} \text{ C}$ |      | 3    |      | ٧    |

<sup>2.</sup> Pulse test:  $t_p$  = 380  $\mu$ s,  $\delta$  < 2 %

STTH6006W Characteristics

Figure 1. Conduction losses versus average current

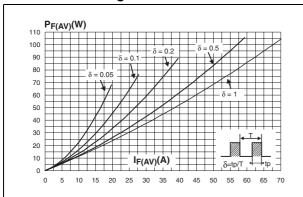


Figure 2. Forward voltage drop versus forward current

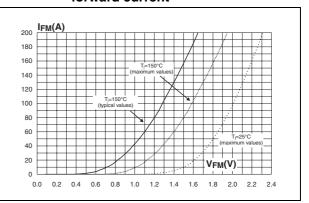


Figure 3. Relative variation of thermal impedance junction to case versus pulse duration

Zth(j-c)/Rth(j-c) 1.0 0.9 0.8 0.7 0.6 0.5 0.4 0.3 0.2 0.1 t<sub>p</sub>(s) 0.0 1.E-03 1.E-02 1.E-01

Figure 4. Peak reverse recovery current versus dl<sub>F</sub>/dt (typical values)

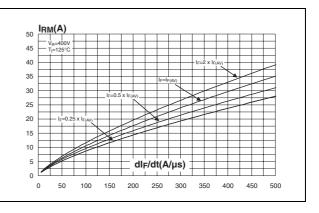


Figure 5. Reverse recovery time versus dl<sub>F</sub>/dt (typical values)


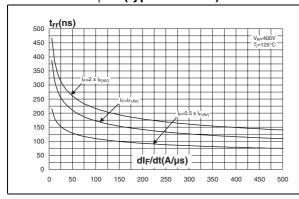



Figure 6. Reverse recovery charges versus dl<sub>=</sub>/dt (typical values)

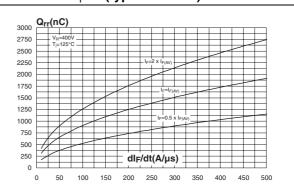

Characteristics STTH6006W

Figure 7. Softness factor versus dl<sub>=</sub>/dt (typical values)

Figure 8. Relative variations of dynamic parameters versus junction temperature

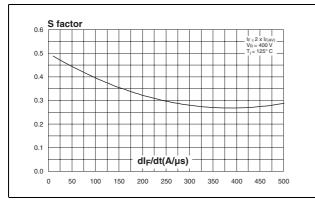

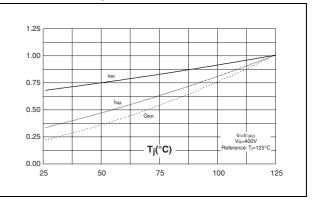
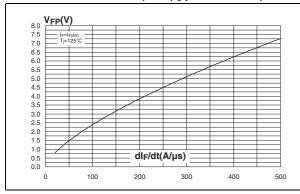


Figure 9. Transient peak forward voltage versus dl<sub>E</sub>/dt (typical values)

Figure 10. Forward recovery time versus dl<sub>F</sub>/dt (typical values)




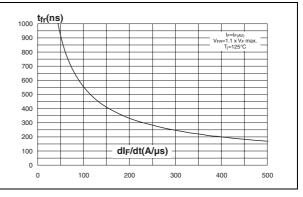


Figure 11. Junction capacitance versus reverse voltage applied (typical values)

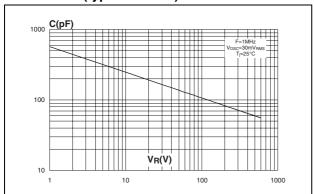

577


#### 2 Package mechanical data

Epoxy meets UL94, V0

Cooling method: by conduction (C)Recommended torque value: 0.80 Nm

Maximum torque value: 1.0 Nm

Table 7. DO-247 dimensions

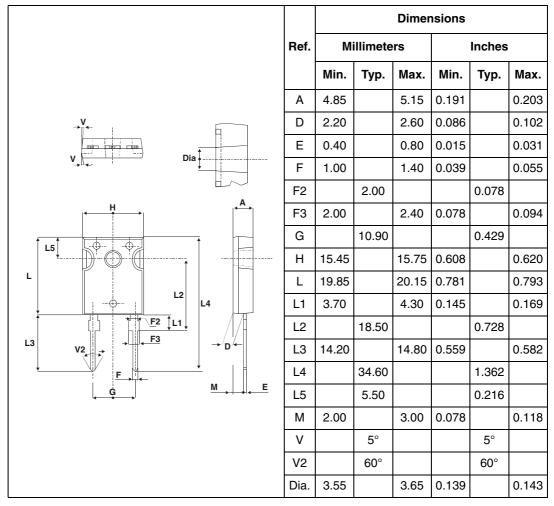

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a lead-free second level interconnect. The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: www.st.com.

577

Ordering information STTH6006W

# **3** Ordering information

 Table 8.
 Ordering information

| Part Number | Marking   | Package | Weight | Base qty | Delivery mode |
|-------------|-----------|---------|--------|----------|---------------|
| STTH6006W   | STTH6006W | DO-247  | 4.40 g | 30       | Tube          |

## 4 Revision history

Table 9.Revision history

| Date        | Revision | Changes                                                    |
|-------------|----------|------------------------------------------------------------|
| 18-May-2006 | 1        | First issue.                                               |
| 11-Jul-2007 | 2        | Reformatted to current standards. Updated <i>Table 7</i> . |

#### Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2007 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

