



**Application Note: AS1370-AN01-
Evaluation Board Description**

AS1370

High Voltage, Low Quiescent Current, 200mA LDO

AN01-Evaluation Board Description

Table of Contents

1	General Description	3
2	Hardware Description.....	4
3	Schematic; Layout and BOM of AS1370 Evaluation Board.....	6
3.1	Schematic	7
3.2	Board Layout.....	8
3.3	BOM	10
4	Ordering Information	10

Revision History

Revision	Date	Owner	Description
1.0	31.10.2013	skre	Initial release

1 General Description

The AS1370 low-power, positive voltage regulator is designed to deliver up to 200mA, while consuming only 3 μ A of quiescent current. The input voltage ranges from 2.6V to a maximum of 50V. Operation with large input to output differential voltages is limited by the maximum power dissipation available from package and environment.


Figure 1: Kit Content



2 Hardware Description

The Evaluation Board has to be supplied via the pins VIN and GND in the range of 2.6V up to 50V. The jumper “SHDN” section C in the picture below has put to “on” (downwards) in order to enable the chip. On the AS1370 Evaluation Board the output voltage is factory-set to 3.3V.

Figure 2: Evaluation Board Overview

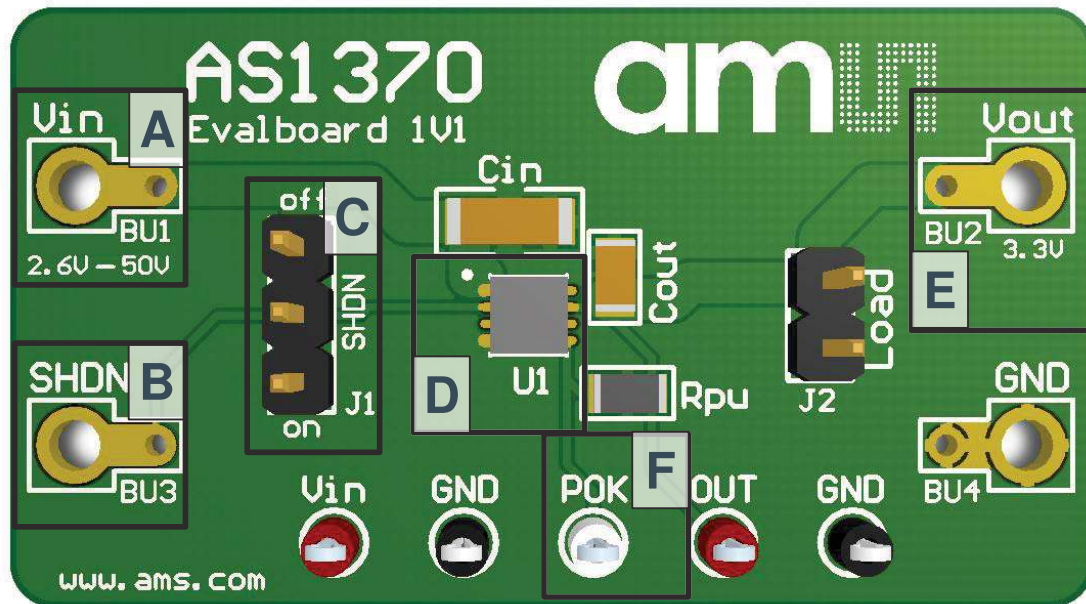


Label	Name	Designator	Description	Info
A	VIN	BU1	Supply	Voltage Range from 2.6V to 50V
B	SHDN	BU3	Shutdown Input	Active-High Shutdown Input. A logic high reduces the ground pin current to < 1 μ A. Connect this pin to GND for normal operation. "SHDN" Jumper (J1) must be removed when using this input to enable/disable the chip.
C	SHDN	J1	-	"on" = Normal operation "off" = Shutdown
D	AS1370	U1	LDO	Provides an output current up to 200mA
E	VOUT	BU2	Output voltage	3.3V
F	POK	-	Power-OK	0 = VOUT < 95%(typ) of VOUTNOM 1 = VOUT > 95%(typ) of VOUTNOM Hysteresis 1%

For detailed information according electrical characteristics please refer to the AS1370 datasheet. The latest version of the datasheet can be found on our homepage, www.ams.com

3 Schematic; Layout and BOM of AS1370 Evaluation Board


The AS1370 Evaluation Board is a 2-layer FR4 board.

Figure 3: AS1370 PCB Layer Stack up

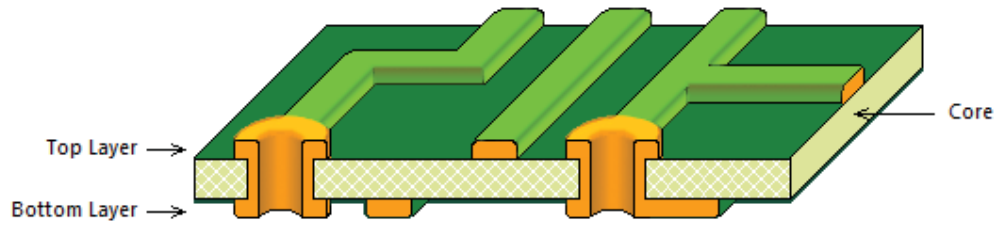

3.1 Schematic

Figure 4: Schematic

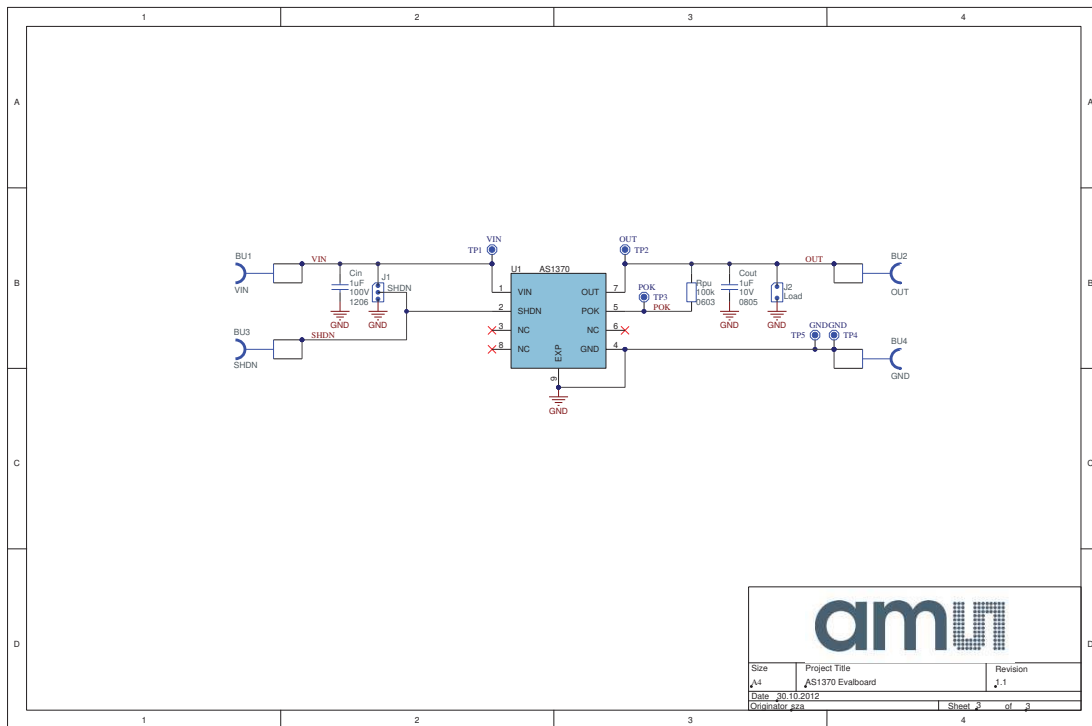

3.2 Board Layout

Figure 5: Top Layer


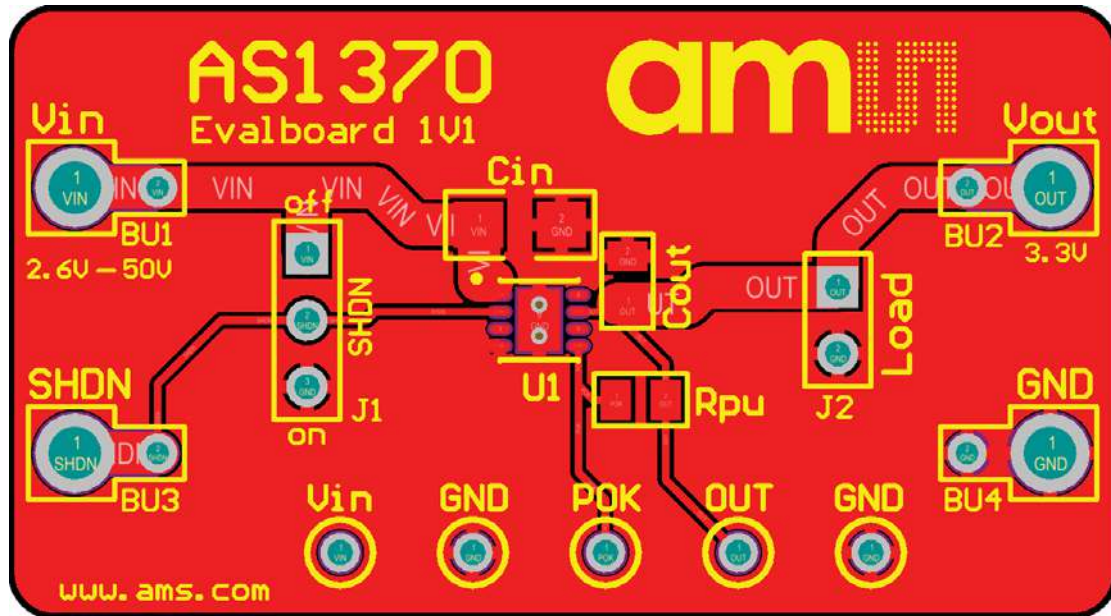


Figure 6: Bottom Layer

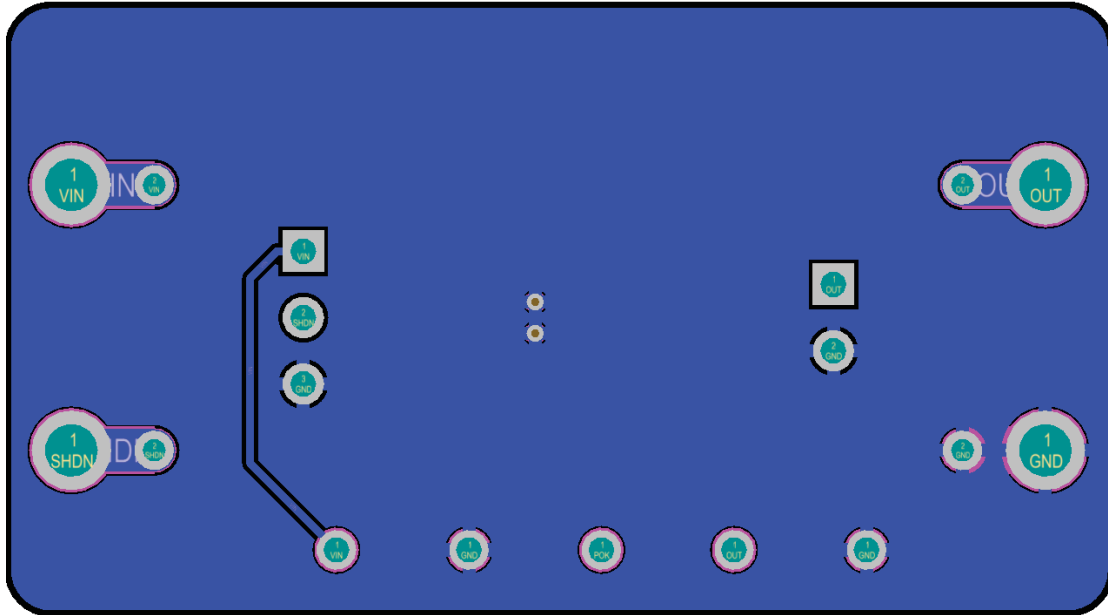

3.3 BOM

Figure 7: Bill of Material

Bill of Materials		AS1370 Evalboard					ams
Company:		ams AG					
Originator:		sza					
PCB Name:		AS1370 Evalboard					
PCB Version:		1v1					
Report Date:		30.10.2012					
#	Designator	Comment	Part Description	Manufacturer	Manufacturer Part Number	Quantity	
1	Cin		MURATA - GFM31CF72A105KA01L - KONDENSATOR, 1206, 1.0UF, 100V	MURATA	GFM31CF72A105KA01L	1	
2	Cout		MURATA - GFM21BR71A105KA01L - CAPACITOR, 0805, X7R, 10V, 1UF	MURATA	GFM21BR71A105KA01L	1	
3	GND	TP5, TP4	VERO - 20-2137 - LÖTSTUTZPUNKT SCHWARZ BIS MAX 475° 100ST	VERO	20-2137	2	
4	J1, J2	SHDN, Load	FISCHER ELEKTRONIK - SL11 124 36G - STIFLEISTE, 36POL, 2.54MM RASTER	FISCHER ELEKTRONIK	SL11 124 36G	2	
5	OUT, VIN	TP2, TP1	VERO - 20-313137 - LÖTSTUTZPUNKT ROT BIS MAX 475° 100ST	VERO	20-313137	2	
6	POK	TP3	VERO - 20-313139 - LÖTSTUTZPUNKT WEISS BIS MAX 475° 100ST	VERO	20-313139	1	
7	Rpu	100k	MULTICOMP - MC 0.063W 0603 1% 100K - WIDERSTAND, 0603 100K	MULTICOMP	MC 0.063W 0603 1% 100K	1	
8	U1	AS1370	AS1370-ATDT-33			1	
Approved						11	
Notes							

4 Ordering Information

The AS1370 Evaluation Kit can be ordered via www.ams.com.

Figure 8: Ordering Information

Ordering Code	Description
AS1370-TD-33_EK_ST	AS1370 Evaluation Board

Copyright

Copyright © 1997-2012, ams AG, Tobelbader Strasse 30, 8141 Unterpemstaetten, Austria-Europe. Trademarks Registered ®. All rights reserved. The material herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner.

All products and companies mentioned are trademarks or registered trademarks of their respective companies.

Disclaimer

Devices sold by ams AG are covered by the warranty and patent indemnification provisions appearing in its Term of Sale. ams AG makes no warranty, express, statutory, implied, or by description regarding the information set forth herein or regarding the freedom of the described devices from patent infringement. ams AG reserves the right to change specifications and prices at any time and without notice. Therefore, prior to designing this product into a system, it is necessary to check with ams AG for current information.

This product is intended for use in normal commercial applications. Applications requiring extended temperature range, unusual environmental requirements, or high reliability applications, such as military, medical life-support or life sustaining equipment are specifically not recommended without additional processing by ams AG for each application. For shipments of less than 100 parts the manufacturing flow might show deviations from the standard production flow, such as test flow or test location.

The information furnished here by ams AG is believed to be correct and accurate. However, ams AG shall not be liable to recipient or any third party for any damages, including but not limited to personal injury, property damage, loss of profits, loss of use, interruption of business or indirect, special, incidental or consequential damages, of any kind, in connection with or arising out of the furnishing, performance or use of the technical data herein. No obligation or liability to recipient or any third party shall arise or flow out of ams AG rendering of technical or other services.

Contact Information

Headquarters

ams AG
Tobelbader Strasse 30
8141 Unterpemstaetten
Austria

T. +43 (0) 3136 500 0

For Sales Offices, Distributors and Representatives, please visit:

<http://www.ams.com/contact>