

## **Rochester Electronics Manufactured Components**

Rochester branded components are manufactured using either die/wafers purchased from the original suppliers or Rochester wafers recreated from the original IP. All recreations are done with the approval of the OCM.

Parts are tested using original factory test programs or Rochester developed test solutions to guarantee product meets or exceeds the OCM data sheet.

## **Quality Overview**

- ISO-9001
- AS9120 certification
- Qualified Manufacturers List (QML) MIL-PRF-35835
  - Class Q Military
  - Class V Space Level
- Qualified Suppliers List of Distributors (QSLD)
  - Rochester is a critical supplier to DLA and meets all industry and DLA standards.

Rochester Electronics, LLC is committed to supplying products that satisfy customer expectations for quality and are equal to those originally supplied by industry manufacturers.

The original manufacturer's datasheet accompanying this document reflects the performance and specifications of the Rochester manufactured version of this device. Rochester Electronics guarantees the performance of its semiconductor products to the original OEM specifications. 'Typical' values are for reference purposes only. Certain minimum or maximum ratings may be based on product characterization, design, simulation, or sample testing.

# SN75140, SN75141 DUAL LINE RECEIVERS

SLLS080B – JANUARY 1977 – REVISED MAY 1995


- Single 5-V Supply
- $\pm 100\text{-mV}$  Sensitivity
- For Application as:  
Single-Ended Line Receiver  
Gated Oscillator  
Level Comparator
- Adjustable Reference Voltage
- TTL Outputs
- TTL-Compatible Strobe
- Designed for Party-Line (Data-Bus) Applications
- Common Reference Voltage Pin
- Common Strobe
- SN75141 Has Diode-Protected Input Stage for Power-Off Condition

## description

Each of these devices consists of a dual single-ended line receiver with TTL-compatible strobes and outputs. The reference voltage (switching threshold) is applied externally and can be adjusted from 1.5 V to 3.5 V, making it possible to optimize noise immunity for a given system design. Due to their low input current (less than 100  $\mu\text{A}$ ), they are ideally suited for party-line (data-bus) systems.

The SN75140 has a common reference voltage pin and a common strobe. The SN75141 is the same as the SN75140 except that the input stage is diode protected.


The SN75140 and SN75141 are characterized for operation from 0°C to 70°C.



† The PS package is only available left-ended taped and reeled (order SN75140 PSLE).


**THE SN75141 IS NOT RECOMMENDED  
FOR NEW DESIGNS**

## logic symbol‡

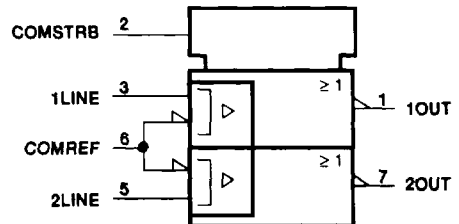

‡ This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

## logic diagram (positive logic)

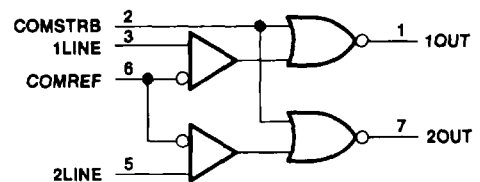

FUNCTION TABLE  
(each receiver)

LINE INPUT	STROBE	OUTPUT
$\leq V_{\text{ref}} - 100 \text{ mV}$	L	H
$\geq V_{\text{ref}} + 100 \text{ mV}$	X	L
X	H	L

H = high level, L = low level, X = irrelevant

PRODUCTION DATA Information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS  
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265


Copyright © 1995, Texas Instruments Incorporated

2-271

# SN75140, SN75141 DUAL LINE RECEIVERS

SLLS080B - JANUARY 1977 - REVISED MAY 1995

## schematic (each receiver)

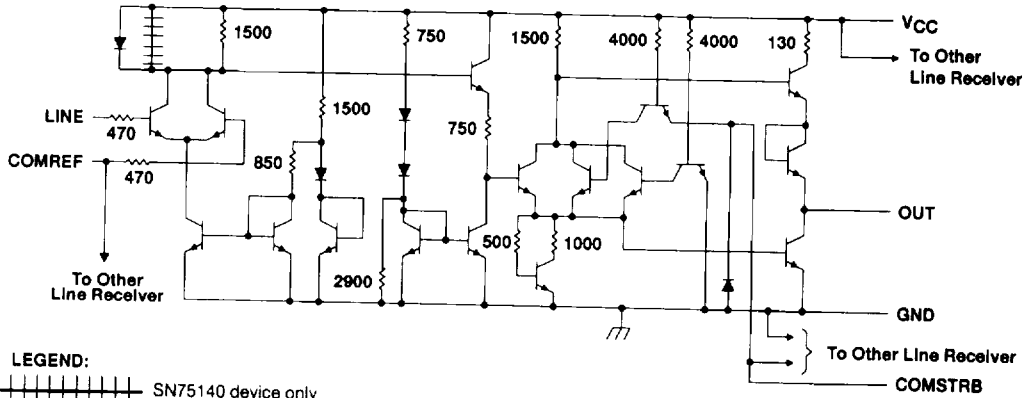

**LEGEND:**

||||| SN75140 device only

Resistor values shown are nominal and in ohms.

### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage, $V_{CC}$ (see Note 1)	7 V
Reference input voltage, $V_{ref}$	5.5 V
Line input voltage range with respect to GND	-2 V to 5.5 V
Line input voltage with respect to $V_{ref}$	$\pm 5$ V
Strobe input voltage	5.5 V
Continuous total power dissipation	See Dissipation Rating Table
Operating free-air temperature range, $T_A$	0°C to 70°C
Storage temperature range, $T_{stg}$	-65°C to 150°C
Lead temperature 1.6 mm (1/16 inch) from case for 10 seconds	260°C

† Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: Unless otherwise specified, voltage values are with respect to network ground terminal.

**DISSIPATION RATING TABLE**

PACKAGE	$T_A \leq 25^\circ\text{C}$ POWER RATING	DERATING FACTOR ABOVE $T_A = 25^\circ\text{C}$	$T_A = 70^\circ\text{C}$ POWER RATING
D	725 mW	5.8 mW/°C	464 mW
P	1000 mW	8.0 mW/°C	640 mW
PS	450 mW	3.6 mW/°C	288 mW

### recommended operating conditions

	MIN	NOM	MAX	UNIT
Supply voltage, $V_{CC}$	4.5	5	5.5	V
Reference input voltage, $V_{ref}$	1.5		3.5	V
High-level line input voltage, $V_{IH(L)}$	$V_{ref} + 0.1$		$V_{CC} - 1$	V
Low-level line input voltage, $V_{IL(L)}$	0		$V_{ref} - 0.1$	V
High-level strobe input voltage, $V_{IH(S)}$	2		5.5	V
Low-level strobe input voltage, $V_{IL(S)}$	0		0.8	V



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

# SN75140, SN75141 DUAL LINE RECEIVERS

SLLS080B – JANUARY 1977 – REVISED MAY 1995

**electrical characteristics over recommended operating free-air temperature range,  $V_{CC} = 5\text{ V} \pm 10\%$ ,  $V_{ref} = 1.5\text{ V}$  to  $3.5\text{ V}$  (unless otherwise noted)**

PARAMETER		TEST CONDITIONS	MIN	TYP†	MAX	UNIT
$V_{IK}$	Strobe input clamp voltage	$I_{I(S)} = -12\text{ mA}$			-1.5	V
$V_{OH}$	High-level output voltage	$V_{IL(L)} = V_{ref} - 100\text{ mV}$ , $V_{IL(S)} = 0.8\text{ V}$ , $I_{OH} = -400\text{ }\mu\text{A}$	2.4			V
$V_{OL}$	Low-level output voltage	$V_{IH(L)} = V_{ref} + 100\text{ mV}$ , $V_{IL(S)} = 0.8\text{ V}$ , $I_{OL} = 16\text{ mA}$			0.4	V
		$V_{IL(L)} = V_{ref} - 100\text{ mV}$ , $V_{IH(S)} = 2\text{ V}$ , $I_{OL} = 16\text{ mA}$			0.4	
$I_{I(S)}$	Strobe input current at maximum input voltage	Strobe			1	mA
		COMSTRB	$V_{I(S)} = 5.5\text{ V}$		2	
$I_{IH}$	High-level input current	Strobe			40	$\mu\text{A}$
		COMSTRB	$V_{I(S)} = 2.4\text{ V}$		80	
		LINE	$V_{I(L)} = 3.5\text{ V}$ , $V_{ref} = 1.5\text{ V}$	35	100	
		Reference	$V_{I(L)} = 0$ , $V_{ref} = 3.5\text{ V}$	35	100	
$I_{IL}$	Low-level input current	COMREF			70	200
		Strobe			-1.6	mA
		COMSTRB	$V_{I(S)} = 0.4\text{ V}$		-3.2	
		LINE	$V_{I(L)} = 0$ , $V_{ref} = 1.5\text{ V}$		-10	$\mu\text{A}$
Reference	$V_{I(L)} = 1.5\text{ V}$ , $V_{ref} = 0$		-10			
COMREF			-20			
$I_{OS}$	Short-circuit output current‡	$V_{CC} = 5.5\text{ V}$	-18		-55	mA
$I_{CCH}$	Supply current, output high	$V_{I(S)} = 0$ , $V_{I(L)} = V_{ref} - 100\text{ mV}$		18	30	mA
$I_{CCL}$	Supply current, output low	$V_{I(S)} = 0$ , $V_{I(L)} = V_{ref} + 100\text{ mV}$		20	35	mA

† All typical values are at  $V_{CC} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$ .

‡ Only one output should be shorted at a time.

## switching characteristics, $V_{CC} = 5\text{ V}$ , $V_{ref} = 2.5\text{ V}$ , $T_A = 25^\circ\text{C}$

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$t_{PLH(L)}$	Propagation delay time, low- to high-level output from LINE	$C_L = 15\text{ pF}$ , $R_L = 400\text{ k}\Omega$ , See Figure 1		22	35	ns
$t_{PHL(L)}$	Propagation delay time, high- to low-level output from LINE			22	30	
$t_{PLH(S)}$	Propagation delay time, low- to high-level output from COMSTRB			12	22	ns
$t_{PHL(S)}$	Propagation delay time, high- to low-level output from COMSTRB			8	15	




POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

2-273

# SN75140, SN75141 DUAL LINE RECEIVERS

SLLS080B – JANUARY 1977 – REVISED MAY 1995

## PARAMETER MEASUREMENT INFORMATION

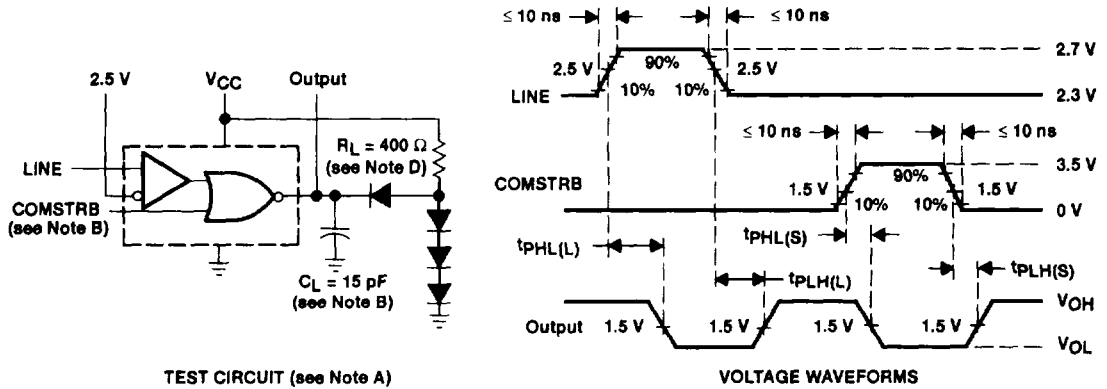

- NOTES: A. Input pulses are supplied by generators having the following characteristics: PRR  $\leq 1 \text{ MHz}$ , duty cycle  $\leq 50\%$ ,  $Z_O = 50 \Omega$ .  
 B. Unused strobes are to be grounded.  
 C.  $C_L$  includes probe and jig capacitance.  
 D. All diodes are 1N3064.

Figure 1. Test Circuit and Voltage Waveforms

## TYPICAL CHARACTERISTICS

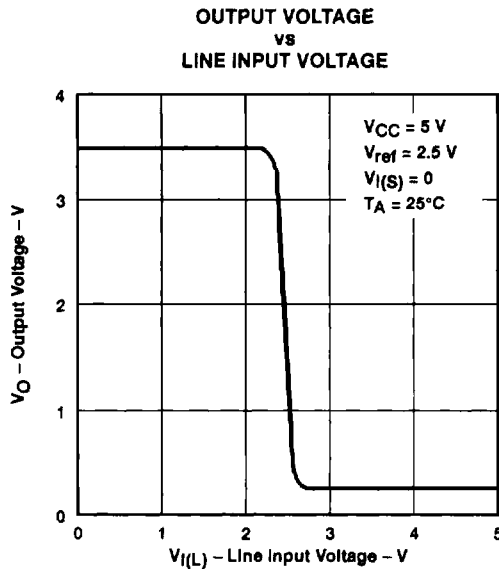


Figure 2

APPLICATION INFORMATION


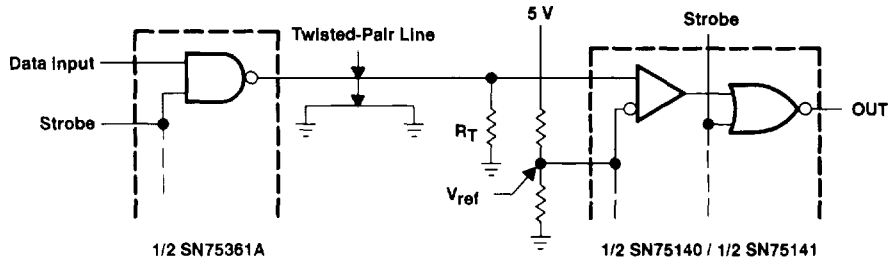


Figure 3. Line Receiver

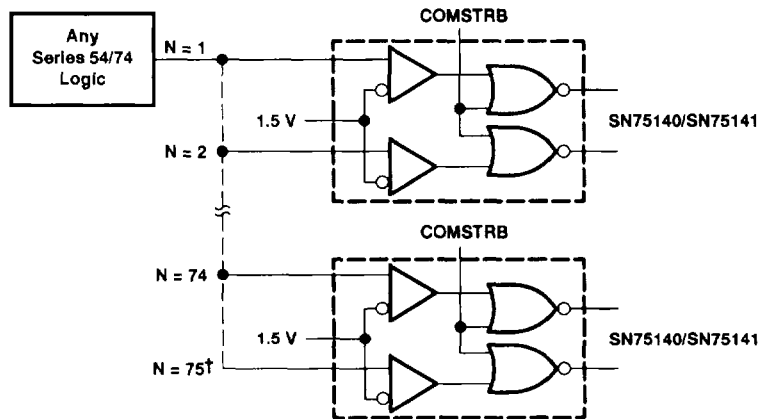


† Although most Series 54/74 circuits have a 2.4-V output at 400  $\mu$ A, they are typically capable of maintaining a 2.4-V output level under a load of 7.5 mA.

Figure 4. High Fanout From Standard TTL Gate

# SN75140, SN75141 DUAL LINE RECEIVERS

SLLS080B - JANUARY 1977 - REVISED MAY 1995

## APPLICATION INFORMATION

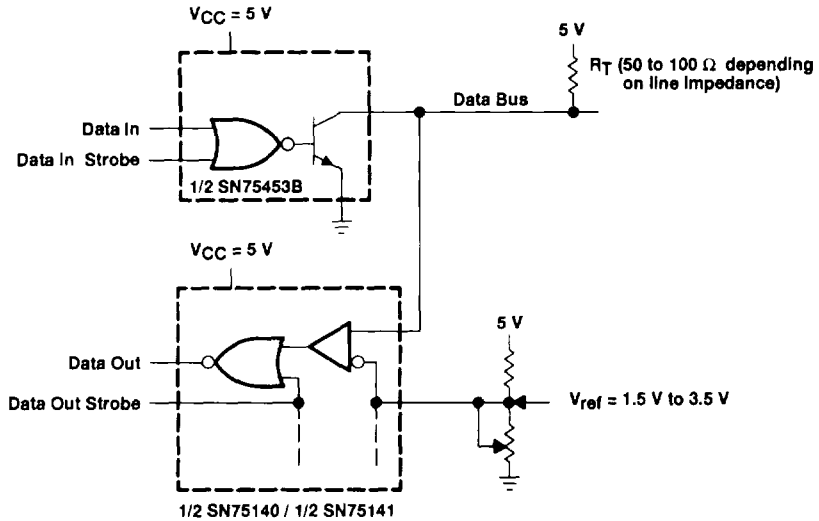

NOTE A: Using this arrangement, as many as 100 transceivers can be connected to a single data bus. The adjustable reference voltage feature allows the noise margin to be optimized for a given system. The complete dual bus transceiver (SN75453B driver and SN75140 receiver) can be assembled in approximately the same space required by a single 16-pin package and only one power supply is required (5 V). Data in and data out are TTL compatible.

Figure 5. Dual Bus Transceiver


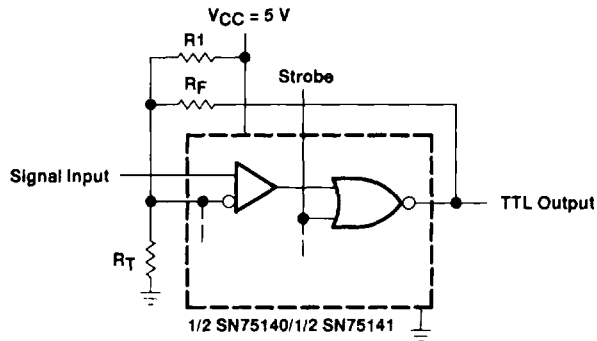


Figure 6. Schmitt Trigger

APPLICATION INFORMATION

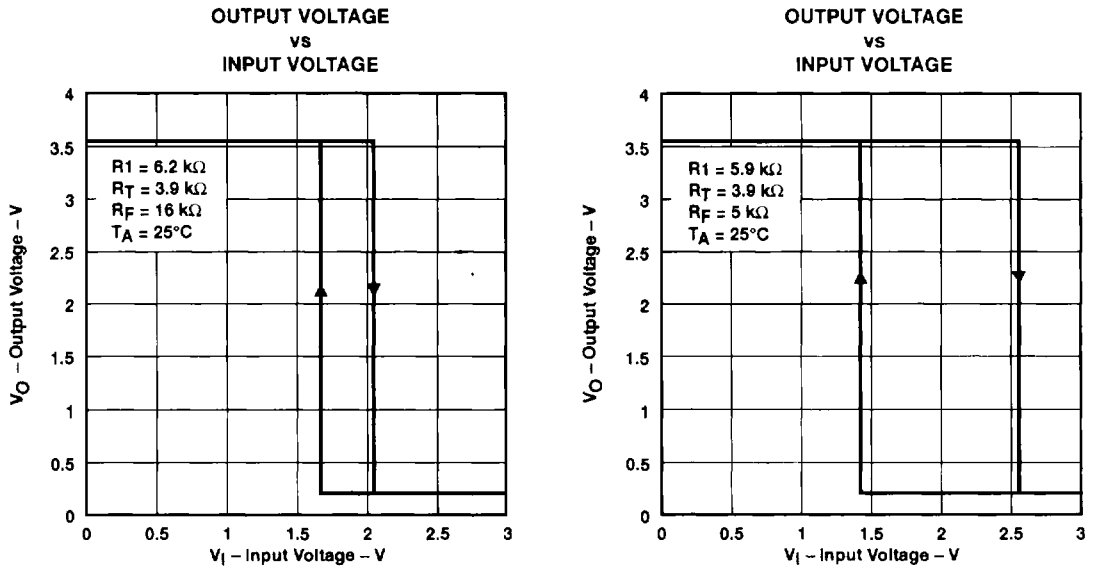

NOTE A: Slowly changing input levels from data lines, optical detectors, and other types of transducers may be converted to standard TTL signals with this Schmitt trigger circuit.  $R_1$ ,  $R_F$ , and  $R_T$  may be adjusted for the desired hysteresis and trigger levels.

Figure 7. Examples of Transfer Characteristics

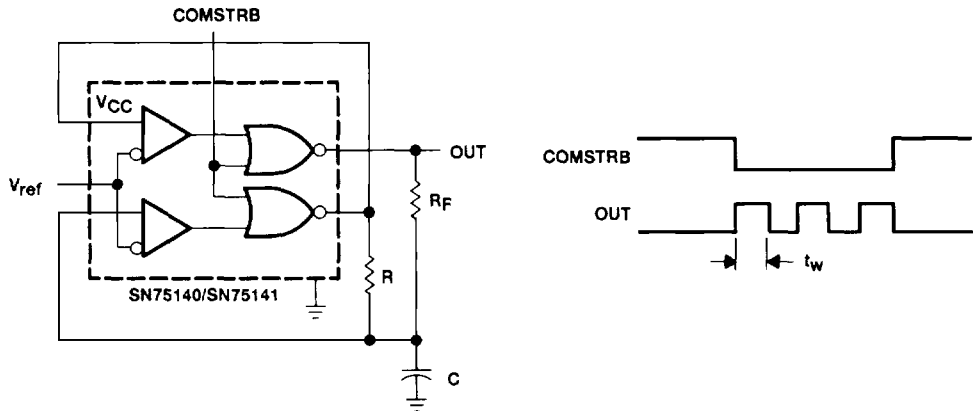


Figure 8. Gated Oscillator



APPLICATION INFORMATION

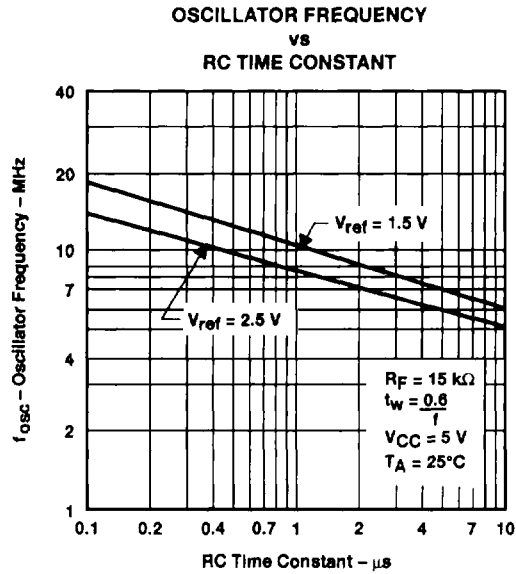


Figure 9