

# Ceramic Balun RF Transformer

50Ω 3000 to 8000 MHz

## NCS2-83-1+



CASE STYLE: GE0805C-1  
PRICE: Contact Sales Dept.

### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Input RF Power	3W

Permanent damage may occur if any of these limits are exceeded.

### Pad Connections

PRIMARY DOT (Unbalanced Port)	1
PRIMARY (GND)	2
SECONDARY DOT (Balanced)	4
SECONDARY (Balanced)	6
NO CONNECTION	3
NOT USED (GND Externally)	5

### Features

- wideband, 3000 to 8000 MHz
- miniature size, 0.079"x0.049"x0.033"
- LTCC construction
- low cost
- aqueous washable

### Applications

- Point to Point
- ISM

### +RoHS Compliant


The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500, 1000, 2000


### Outline Drawing

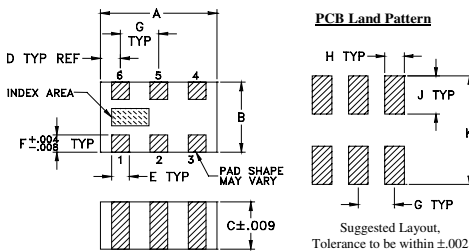

### Outline Dimensions (inch/mm)

A	B	C	D	E	F
.079	.049	.033	.014	.012	.012
2.01	1.24	0.84	0.36	0.30	0.30
G	H	J	K	wt	
.026	.014	.039	.110	grams	
0.66	0.36	1.00	2.80	.008	

### Demo Board MCL P/N: TB-419+ Suggested PCB Layout (PL-356)

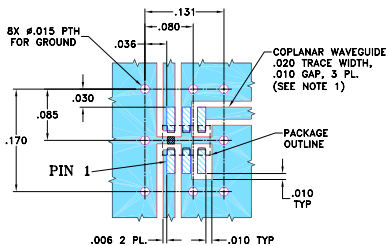

#### NOTES:

1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .010" ± .001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
  2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

### Electrical Specifications at 25°C




Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio (secondary/primary)			2		
Frequency Range		3000	—	8000	MHz
Insertion Loss*	3000-8000	—	1.6	1.9	dB
Amplitude Unbalance	3000-8000	—	1.8	2.5	dB
Phase Unbalance†	3000-8000	—	12	19	Degree

\* Insertion Loss is referenced to mid-band loss, 0.6 dB. Reference Demo Board TB-419+.  
† Relative to 180°


### Typical Performance Data at 25°C\*\*

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
3000.00	0.78	12.56	0.85	8.52
3500.00	0.83	11.58	0.33	6.93
4000.00	0.98	10.00	0.12	6.27
4500.00	0.93	10.64	0.01	6.30
5000.00	0.65	15.90	0.22	6.64
5500.00	0.57	24.01	0.50	7.15
6000.00	0.86	12.52	0.88	7.74
6500.00	1.16	10.54	1.26	8.03
7000.00	1.05	12.36	1.45	7.65
8000.00	1.15	17.40	0.29	3.74

\*\* Measured with Agilent E5071B network analyzer using impedance conversion and port extension.

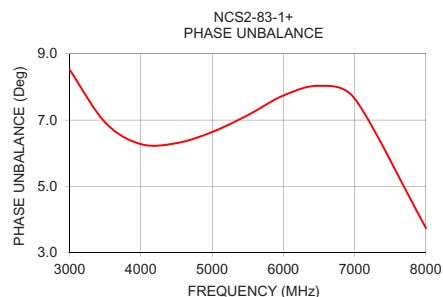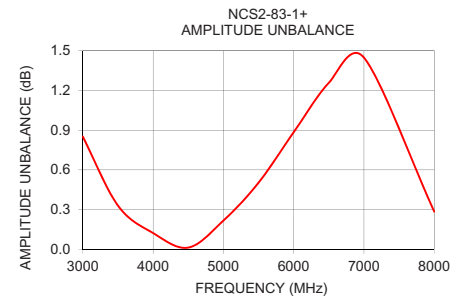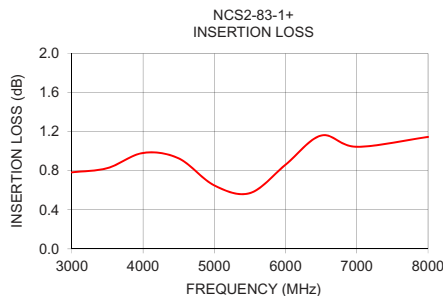

### configuration J



\*Internal Open Circuit

