



Main Product Characteristics

$V_{(BR)DSS}$	-60V
$R_{DS(ON)}$	72mΩ
I_D	-5A



SOP-8



Schematic Diagram

Features and Benefits

- Advanced MOSFET process technology
- Ideal for high efficiency switched mode power supplies
- Low on-resistance with low gate charge
- Fast switching and reverse body recovery



Description

The SSFQ6907 utilizes the latest techniques to achieve high cell density and low on-resistance. These features make this device extremely efficient and reliable for use in high efficiency switch mode power supply and a wide variety of other applications.

Absolute Maximum Ratings ($T_C=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Max.	Unit
Drain-Source Voltage	V_{DS}	-60	V
Gate-Source Voltage	V_{GS}	± 20	V
Drain Current-Continuous ($T_c=25^\circ\text{C}$)	I_D	-5	A
Drain Current-Continuous ($T_c=100^\circ\text{C}$)		-3.2	
Drain Current-Pulsed ¹	I_{DM}	-13.2	A
Single Pulse Avalanche Energy ²	E_{AS}	31	mJ
Single Pulse Avalanche Current ²	I_{AS}	-25	A
Power Dissipation ($T_c=25^\circ\text{C}$)	P_D	4	W
Power Dissipation-Derate above 25°C		0.03	W/°C
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	85	°C/W
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	31.2	°C/W
Operating Junction Temperature Range	T_J	-50 To +150	°C
Storage Temperature Range	T_{STG}	-50 To +150	°C

Electrical Characteristics ($T_J=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
On/Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=250\mu\text{A}$	-60	-	-	V
BV_{DSS} Temperature Coefficient	$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	Reference to 25°C , $I_{\text{D}}=1\text{mA}$	-	-0.05	-	$\text{V}/^\circ\text{C}$
Drain-Source Leakage Current	$I_{\text{DS}(\text{SS})}$	$V_{\text{DS}}=-60\text{V}, V_{\text{GS}}=0\text{V}, T_J=25^\circ\text{C}$	-	-	-1	μA
		$V_{\text{DS}}=-48\text{V}, V_{\text{GS}}=0\text{V}, T_J=125^\circ\text{C}$	-	-	-10	μA
Gate-Source Leakage Current	I_{GSS}	$V_{\text{GS}}=\pm 25\text{V}, V_{\text{DS}}=0\text{V}$	-	-	± 100	nA
Static Drain-Source On-Resistance	$R_{\text{DS}(\text{ON})}$	$V_{\text{GS}}=-10\text{V}, I_{\text{D}}=-3\text{A}$	-	60	72	$\text{m}\Omega$
		$V_{\text{GS}}=-4.5\text{V}, I_{\text{D}}=-2\text{A}$	-	75	90	
Gate Threshold Voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{GS}}=V_{\text{DS}}, I_{\text{D}}=-250\mu\text{A}$	-1.2	-1.6	-3	V
$V_{\text{GS}(\text{th})}$ Temperature Coefficient	$\Delta V_{\text{GS}(\text{th})}$		-	5	-	$\text{mV}/^\circ\text{C}$
Forward Transconductance	g_{fs}	$V_{\text{DS}}=-10\text{V}, I_{\text{D}}=-3\text{A}$	-	8.5	-	S
Dynamic and Switching Characteristics						
Total Gate Charge ^{3,4}	Q_g	$V_{\text{DS}}=-30\text{V}, I_{\text{D}}=-3\text{A}$ $V_{\text{GS}}=-10\text{V}$	-	16.4	23	nC
Gate-Source Charge ^{3,4}	Q_{gs}		-	2.8	4	
Gate-Drain Charge ^{3,4}	Q_{gd}		-	3.6	6	
Turn-On Delay Time ^{3,4}	$t_{\text{d}(\text{on})}$	$V_{\text{DD}}=-30\text{V}, R_{\text{G}}=6\Omega$ $V_{\text{GS}}=-10\text{V}, I_{\text{D}}=-1\text{A}$	-	8.3	16	nS
Rise Time ^{3,4}	t_r		-	29.6	56	
Turn-Off Delay Time ^{3,4}	$t_{\text{d}(\text{off})}$		-	51.7	98	
Fall Time ^{3,4}	t_f		-	15.6	30	
Input Capacitance	C_{iss}		-	870	1260	pF
Output Capacitance	C_{oss}	$V_{\text{DS}}=-30\text{V}, V_{\text{GS}}=0\text{V}, F=1\text{MHz}$	-	70	100	
Reverse Transfer Capacitance	C_{rss}		-	42	60	
Gate Resistance	R_g	$V_{\text{GS}}=0\text{V}, V_{\text{DS}}=0\text{V}, F=1\text{MHz}$	-	16	32	Ω
Drain-Source Diode Characteristics and Maximum Ratings						
Continuous Source Current	I_s	$V_G=V_D=0\text{V},$ Force Current	-	-	-5	A
Pulsed Source Current	I_{SM}		-	-	-10	A
Diode Forward Voltage	V_{SD}	$V_{\text{GS}}=0\text{V}, I_{\text{S}}=-1\text{A}, T_J=25^\circ\text{C}$	-	-	-1	V

Note :

1. Repetitive Rating : Pulsed width limited by maximum junction temperature.
2. $V_{\text{DD}}=-25\text{V}, V_{\text{GS}}=-10\text{V}, L=0.1\text{mH}, I_{\text{AS}}=-25\text{A}, R_{\text{G}}=25\Omega$, Starting $T_J=25^\circ\text{C}$.
3. Pulse test: pulse width $\leq 300\text{us}$, duty cycle $\leq 2\%$.
4. Essentially independent of operating temperature.

Typical Electrical and Thermal Characteristic Curves

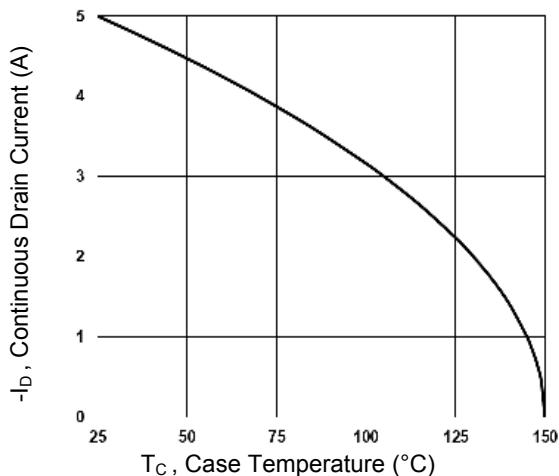


Figure 1. Continuous Drain Current vs. T_c

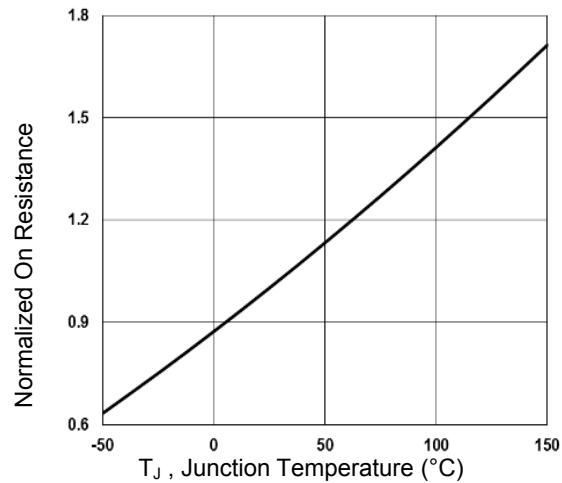


Figure 2. Normalized R_{DSON} vs. T_j

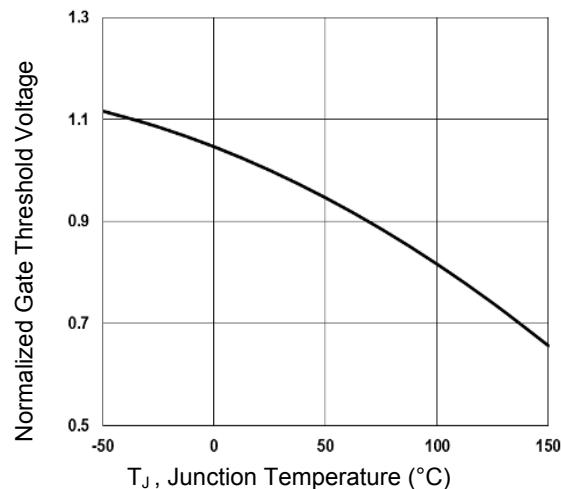


Figure 3. Normalized V_{th} vs. T_j

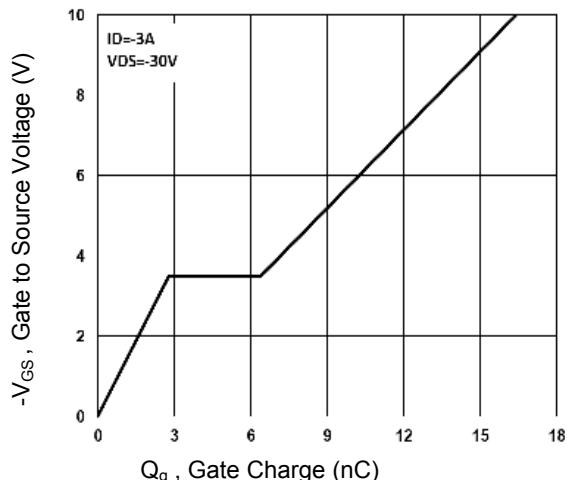


Figure 4. Gate Charge Waveform

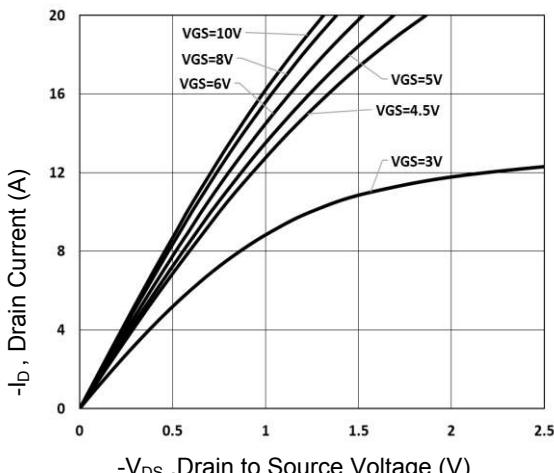


Figure 5. Typical Output Characteristics

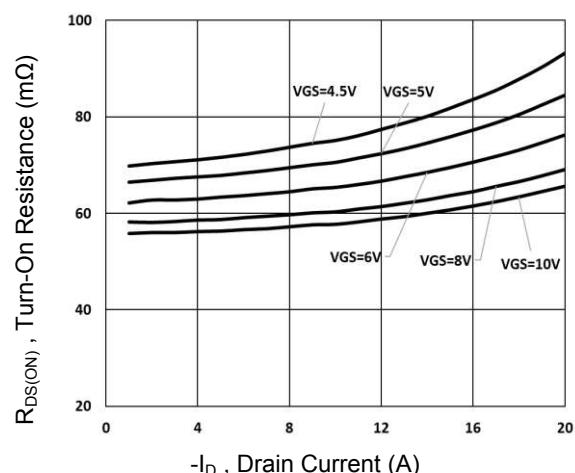


Figure 6. Turn-On Resistance vs. I_D

Typical Electrical and Thermal Characteristic Curves

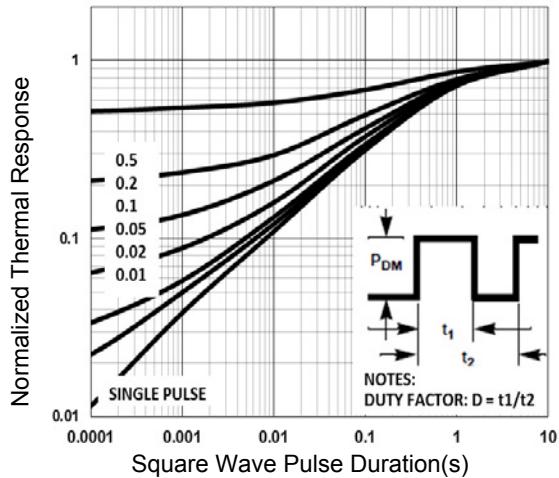


Figure 7. Normalized Transient Impedance

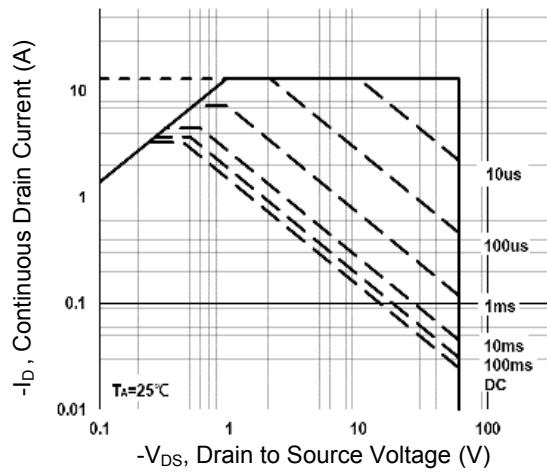


Figure 8. Maximum Safe Operation Area

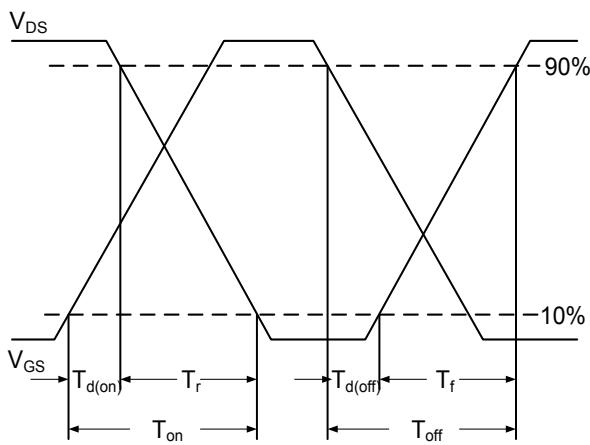


Figure 9. Switching Time Waveform


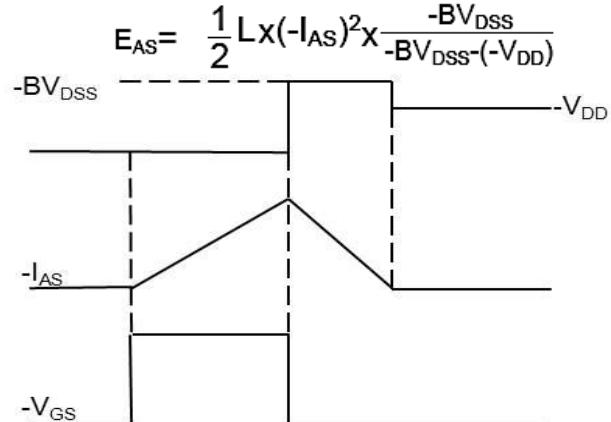


Figure 10. EAS Waveform

Package Outline Dimensions (SOP-8)

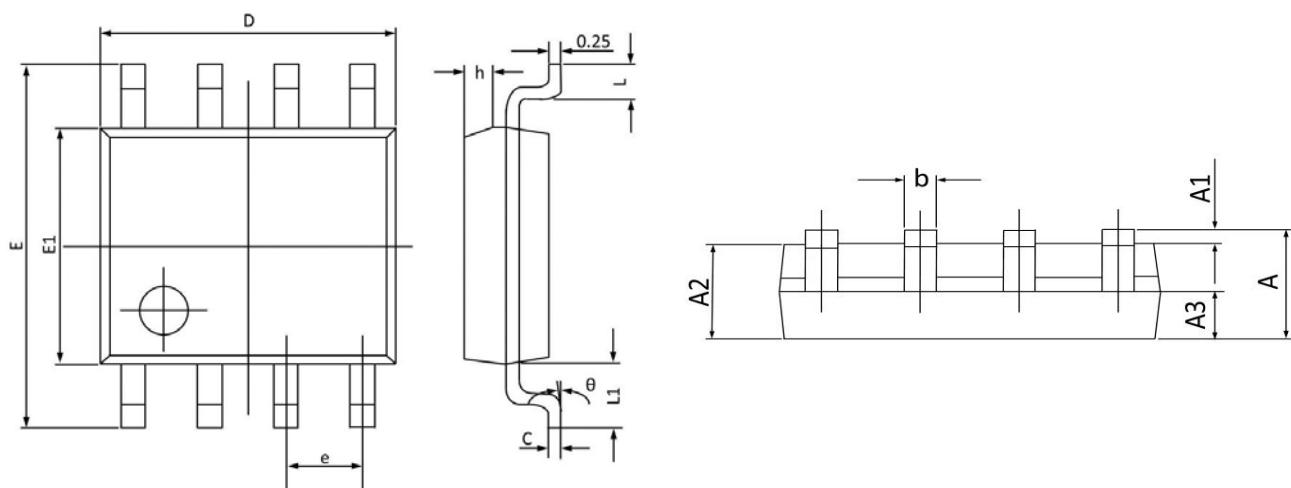

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.068
A1	0.100	0.250	0.004	0.009
A2	1.300	1.500	0.052	0.059
A3	0.600	0.700	0.024	0.027
b	0.390	0.480	0.016	0.018
c	0.210	0.260	0.009	0.010
D	4.700	5.100	0.186	0.200
E	5.800	6.200	0.229	0.244
E1	3.700	4.100	0.146	0.161
e	1.270(BSC)		0.050(BSC)	
h	0.250	0.500	0.010	0.019
L	0.500	0.800	0.019	0.031
L1	1.050(BSC)		0.041(BSC)	
θ	0°	8°	0°	8°

Order Information

Device	Package	Marking	Carrier	Quantity
SSFQ6907	SOP-8	DS6907	Tape & Reel	3,000 pcs / Reel