


RPC-1.85 Open Circuit Plug

08S12L-000S3

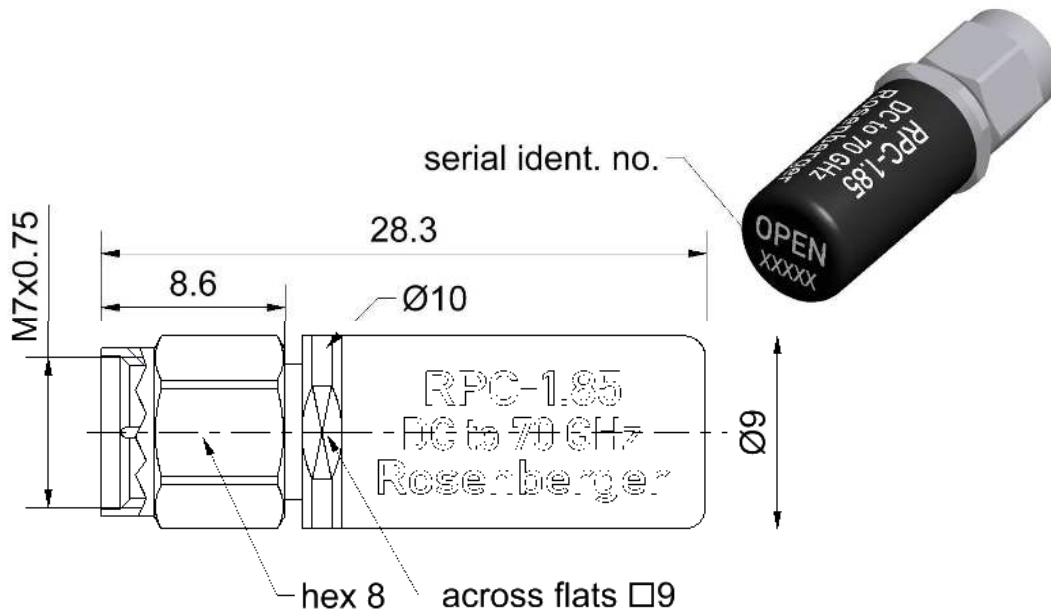

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to IEC 61169-32
Mechanically compatible with RPC-2.40

Documents

Application note AN001 "Calibration Services"

Material and plating

Connector parts

| | Material | Plating |
|------------------|------------------|---------------------------------|
| Center conductor | Beryllium copper | Gold, min. 1.27 µm, over nickel |
| Outer conductor | Stainless steel | Passivated |
| Coupling nut | Stainless steel | Passivated |
| Dielectric | PS | |

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

RF_35/05:10/6.0

Electrical data

| | |
|---------------------------------------|---|
| Frequency range | DC to 70 GHz |
| Return loss | ≤ 0.20 dB, DC to 4 GHz ≤ 0.30 dB, 4 GHz to 40 GHz ≤ 0.40 dB, 40 GHz to 70 GHz |
| Error from nominal phase ¹ | ≤ 2.0°, DC to 4 GHz ≤ 5.0°, 4 GHz to 40 GHz ≤ 8.0°, 40 GHz to 70 GHz |

¹ The nominal phase is defined by the Offset Delay, the Offset Loss and the Fringing Capacitance

Mechanical data

| | |
|--------------------|--------------------|
| Mating cycles | ≥ 500 |
| Maximum torque | 1.65 Nm |
| Recommended torque | 0.90 Nm |
| Gauge | 0.00 mm to 0.03 mm |

General standard definition

For proper operation the vector network analyzer (VNA) needs a model describing the electrical behaviour of this calibration standard. The different models, units, and terms used will depend on the VNA type and they will have to be entered into the VNA. All values are based on typical geometry and plating.

| | |
|-------------------------------------|--------------------------------|
| Offset Z_0 / Impedance / Z_0 | 50 Ω |
| Offset Delay | 16.680 ps |
| Length (electrical) / Offset Length | 5.00 mm |
| Offset Loss | 3.75 G Ω /s |
| Loss | 0.0109 dB/ $\sqrt{\text{GHz}}$ |
| Fringing Capacitances ² | |

² Fringing Capacitances are determined individually for each Open Circuit and are documented in a Calibration Certificate.

Environmental data

| | |
|---|------------------|
| Operating temperature range ³ | +20 °C to +26 °C |
| Rated temperature range of use ⁴ | 0 °C to +50 °C |
| Storage temperature range | -40 °C to +85 °C |

RoHS compliant

³ Temperature range over which these specifications are valid.

⁴ This range is underneath and above the operating temperature range, within the Open Circuit is fully functional and could be used without damage.

Technical Data Sheet

Rosenberger

RPC-1.85

Open Circuit Plug

08S12L-000S3

Declaration of calibration options

Factory Calibration

Standard delivery for this calibration standard includes a Factory Calibration. The Calibration Certificate issued reports individual calibration results, traceable to national / international standards. Model based standard definitions are individually optimized and reported in an Agilent/Keysight, Rohde & Schwarz and Anritsu compatible VNA format.

Accredited Calibration

Not available.

For further, more detailed information see application note AN001 on the Rosenberger homepage.

Calibration interval

Recommendation 12 months

Packing

Standard 1 pce in box
Weight 6.8 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

| Draft | Date | Approved | Date | Rev. | Engineering change number | Name | Date |
|------------------|----------|--------------|----------|------|---------------------------|------------------|----------|
| Herbert Babinger | 26/08/04 | Martin Moder | 24.03.15 | f00 | 14-1492 | Herbert Babinger | 24.03.15 |

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
www.rosenberger.de

Tel. : +49 8684 18-0
Fax : +49 8684 18-499
Email : info@rosenberger.de

Page
3 / 3