THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

| ITEM | CONNECTOR PART NO. | DESCRIPTION |
|---|---|---|
| 1 | SXAM-01T-P0.6 | XA W-W CONNECTOR CONTACT |
| 2 | UL1007, 22 AWG | BLACK |

## Applicable Housings

| XA Series | | | XAD Series | |
|---|---|---|---|---|
| NO. OF CIRCUITS | HOUSING PART NO. WITH PANEL LOCKS | HOUSING PART NO. WITHOUT PANEL LOCKS | NO. OF CIRCUITS | HOUSING PART NO. |
| 2 | XARR-02V | XARR-02VF | 8 | XADR-08V |
| 3 | XARR-03V | XARR-03VF | 10 | XADR-10V |
| 4 | XARR-04V | XARR-04VF | 12 | XADR-12V |
| 5 | XARR-05V | XARR-05VF | 14 | XADR-14V |
| 6 | XARR-06V | XARR-06VF | 16 | XADR-16V |
| 7 | XARR-07V | - | 18 | XADR-18V |
| 8 | XARR-08V | XARR-08VF | 20 | XADR-20V |
| 9 | XARR-09V | XARR-09VF | 22 | XADR-22V |
| 10 | XARR-10V | XARR-10VF | 24 | XADR-24V |
| 11 | XARR-11V | - | 26 | XADR-26V |
| 12 | XARR-12V | XARR-12VF | 28 | XADR-28V |
| 13 | XARR-13V | - | 30 | XADR-30V |
| 14 | XARR-14V | - | 32 | XADR-32V |
| 15 | XARR-15V | - | 34 | XADR-34V |
| | | | 36 | XADR-36V |
| | | | 40 | XADR-40V |

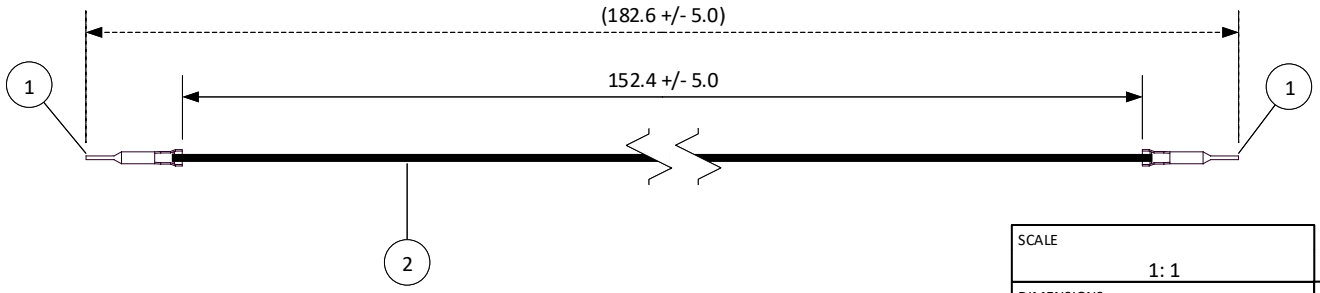


| Electrical Specifications |
|---|
| Current: 3.0A AC/DC |
| Voltage: 250V AC/DC |

| REV. | DESCRIPTION | DATE | BY |
|---|---|---|---|
| 2 | Add electrical specifications | 7/2/2018 | SP |
| 1 | Added housing part numbers for the XAD series | 12/27/2017 | SP |

SCALE: 1: 1

DIMENSIONS: All dimensions are in MM with a tolerance of +/- 3.0 unless otherwise specified.

DESCRIPTION: 2.5 mm Pitch XA & XAD W-W Series Standard Leads - 6" Inside Length
DOUBLE-END LEADS, M-M

DRAWN BY: STEVEN PILKINGTON

ASSEMBLY PART NO.: ASXAMSXAM22K152

CHECKED BY: JUSTIN BAKER

DRAWING NO.: GAM-074

DATE: 3/9/2016