

# Isolation Power Transformers

EE5 Platform SMD



- Push Pull Converter Transformer
- Operational Insulation
- 1.5KVrms isolation (380Vrms continuous)
- Compact and cost effective industrial design
- Output: 1.0W max

### Electrical Specifications @ 25°C - Operating Temperature -40°C to +125°C

Part Number	Inductance (1-3) ( $\mu\text{H} \pm 35\%$ )	Leakage Inductance (1-3) with (4-6) shorted ( $\mu\text{H} \text{ MAX}$ )	Capacitance (1, 2, 3) to (4, 5, 6) (pF MAX)	DCR (1-3) ( $\Omega \text{ MAX}$ )	DCR (4-6) ( $\Omega \text{ MAX}$ )	MAX (1-3) <sup>1</sup> (V- $\mu\text{sec}$ Max)	Turns Ratio (1:3) (6:4)	Isolated Voltage (Vrms)
PH9084.011NL	456	3.0	15	2.0	2.0	37	1CT : 1CT	1500
PH9084.034NL	256	3.0	15	1.6	2.0	28	3CT : 4CT	
PH9084.043NL	456	3.0	15	2.0	2.0	37	4CT : 3CT	
PH9084.021NL	456	3.0	15	2.0	1.2	37	2CT : 1CT	



#### Notes:

- The ET Max is calculated to limit the core loss and temperature rise at 200KHz based on a bipolar flux swing of 180mT Peak.
- For Push-Pull topology, where the voltage is applied across half the primary winding turns, the ET needs to be derated by 50% for the same flux swing.
- The applied ET may need to be further derated for higher frequencies based on the temperature rise which results from the core and copper losses
  - To calculate total copper loss (W), use the following formula:  
Copper Loss (W) =  $I_{rms\_Primary}^2 * DCR\_Primary + I_{rms\_Secondary}^2 * DCR\_Secondary$
  - To calculate total core loss (W), use the following formula:  
Core Loss (W) =  $1.2E-12 * (\text{Frequency in kHz})^{1.9} * (180 * [ET/ET \text{ Max}])^{2.7}$   
Where ET is the applied Volt Second, ET Max is the rated Volt Second for 180mT flux swing
  - To calculate temperature rise, use the following formula:  
Temperature Rise ( $^{\circ}\text{C}$ ) =  $302 * (\text{Core Loss (W)} + \text{Copper Loss (W)})$
- Optional Tape & Reel packing can be ordered by adding a "T" suffix to the part number (i.e. PH9084.011NL becomes PH9084.011NLT). Pulse complies to industry standard tape and reel specification EIA481.
- The "NL" suffix indicates an RoHS-compliant part number.

## Mechanical

## Schematic

PH9084.XXXNL

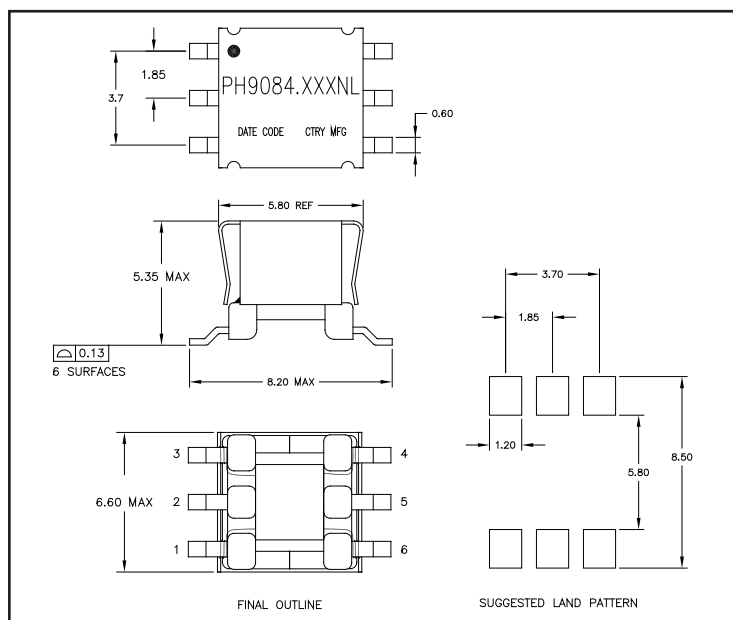

Weight .....0.37grams  
Tape & Reel .....900/reel  
Tray .....120/tray

#### Dimensions: mm

Unless otherwise specified,  
all tolerances are  $\pm 0.25$

# Isolation Power Transformers

EE5 Platform SMD



---

## For More Information

### **Pulse Worldwide Headquarters**

15255 Innovation Drive Ste 100  
San Diego, CA 92128  
U.S.A.

Tel: 858 674 8100  
Fax: 858 674 8262

### **Pulse Europe**

Pulse Electronics GmbH  
Am Rottland 12  
58540 Meinerzhagen  
Germany

Tel: 49 2354 777 100  
Fax: 49 2354 777 168

### **Pulse China Headquarters**

Pulse Electronics (ShenZhen) CO., LTD  
D708, Shenzhen Academy of  
Aerospace Technology,  
The 10th Keji South Road,  
Nanshan District, Shenzhen,  
P.R. China 518057

Tel: 86 755 33966678  
Fax: 86 755 33966700

### **Pulse North China**

Room 2704/2705  
Super Ocean Finance Ctr.  
2067 Yan An Road West  
Shanghai 200336  
China

Tel: 86 21 62787060  
Fax: 86 2162786973

### **Pulse South Asia**

3 Fraser Street  
0428 DUO Tower  
Singapore 189352

Tel: 65 6287 8998  
Fax: 65 6280 0080

### **Pulse North Asia**

1F., No.111 Xiyuan Rd  
Zhongli City  
Taoyuan City 32057  
Taiwan (R.O.C)

Tel: 886 3 4356768  
Fax: 886 3 4356820

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2019. Pulse Electronics, Inc. All rights reserved.