

Antenna

YC0001AA Datasheet

Antenna Services

Version: 2.5

Date: 2021-12-06

Status: Released



At Quectel, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

Tel: +86 21 5108 6236

Email: info@quectel.com

Or our local offices. For more information, please visit:

<http://www.quectel.com/support/sales.htm>.

For technical support, or to report documentation errors, please visit:

<http://www.quectel.com/support/technical.htm>.

Or email us at: support@quectel.com.

Legal Notices

We offer information as a service to you. The provided information is based on your requirements and we make every effort to ensure its quality. You agree that you are responsible for using independent analysis and evaluation in designing intended products, and we provide reference designs for illustrative purposes only. Before using any hardware, software or service guided by this document, please read this notice carefully. Even though we employ commercially reasonable efforts to provide the best possible experience, you hereby acknowledge and agree that this document and related services hereunder are provided to you on an “as available” basis. We may revise or restate this document from time to time at our sole discretion without any prior notice to you.

Use and Disclosure Restrictions

License Agreements

Documents and information provided by us shall be kept confidential, unless specific permission is granted. They shall not be accessed or used for any purpose except as expressly provided herein.

Copyright

Our and third-party products hereunder may contain copyrighted material. Such copyrighted material shall not be copied, reproduced, distributed, merged, published, translated, or modified without prior written consent. We and the third party have exclusive rights over copyrighted material. No license shall be granted or conveyed under any patents, copyrights, trademarks, or service mark rights. To avoid ambiguities, purchasing in any form cannot be deemed as granting a license other than the normal non-exclusive, royalty-free license to use the material. We reserve the right to take legal action for noncompliance with abovementioned requirements, unauthorized use, or other illegal or malicious use of the material.

Trademarks

Except as otherwise set forth herein, nothing in this document shall be construed as conferring any rights to use any trademark, trade name or name, abbreviation, or counterfeit product thereof owned by Quectel or any third party in advertising, publicity, or other aspects.

Third-Party Rights

This document may refer to hardware, software and/or documentation owned by one or more third parties (“third-party materials”). Use of such third-party materials shall be governed by all restrictions and obligations applicable thereto.

We make no warranty or representation, either express or implied, regarding the third-party materials, including but not limited to any implied or statutory, warranties of merchantability or fitness for a particular purpose, quiet enjoyment, system integration, information accuracy, and non-infringement of any third-party intellectual property rights with regard to the licensed technology or use thereof. Nothing herein constitutes a representation or warranty by us to either develop, enhance, modify, distribute, market, sell, offer for sale, or otherwise maintain production of any our products or any other hardware, software, device, tool, information, or product. We moreover disclaim any and all warranties arising from the course of dealing or usage of trade.

Privacy Policy

To implement module functionality, certain device data are uploaded to Quectel’s or third-party’s servers, including carriers, chipset suppliers or customer-designated servers. Quectel, strictly abiding by the relevant laws and regulations, shall retain, use, disclose or otherwise process relevant data for the purpose of performing the service only or as permitted by applicable laws. Before data interaction with third parties, please be informed of their privacy and data security policy.

Disclaimer

- a) We acknowledge no liability for any injury or damage arising from the reliance upon the information.
- b) We shall bear no liability resulting from any inaccuracies or omissions, or from the use of the information contained herein.
- c) While we have made every effort to ensure that the functions and features under development are free from errors, it is possible that they could contain errors, inaccuracies, and omissions. Unless otherwise provided by valid agreement, we make no warranties of any kind, either implied or express, and exclude all liability for any loss or damage suffered in connection with the use of features and functions under development, to the maximum extent permitted by law, regardless of whether such loss or damage may have been foreseeable.
- d) We are not responsible for the accessibility, safety, accuracy, availability, legality, or completeness of information, advertising, commercial offers, products, services, and materials on third-party websites and third-party resources.

Copyright © Quectel Wireless Solutions Co., Ltd. 2021. All rights reserved.

About the Document

Revision History

Version	Date	Author	Note
1.0	2020-05-28	Kenny YIN	Initial
2.0	2020-06-22	Kenny YIN	Updated the specifications.
2.1	2020-12-11	Kenny YIN	Updated the antenna image in Chapter 2.
2.2	2021-01-27	Kenny YIN	Added the return loss data, pattern laboratory pictures, package parameters.
2.3	2021-03-17	Kenny YIN	Updated the product height tolerance (Chapter 12).
2.4	2021-07-12	Aria CHU	Updated the drawing in Chapter 12.
2.5	2021-12-06	Aria CHU	Updated the product description in Chapter 1.

Contents

About the Document	3
Contents.....	4
1 Product Description	5
2 Product Features.....	5
3 Product Specifications	6
4 Overall Performance	7
4.1 Test Environment.....	7
4.2 VSWR.....	8
4.3 Return Loss	8
4.4 Efficiency	9
4.5 Gain.....	10
4.6 Radiation Patterns.....	11
5 Schematic Symbol and Pin Definition	13
6 Transmission Line	14
7 Matching Circuit.....	15
8 Host PCB Requirement.....	17
8.1 Host PCB Size.....	18
9 Soldering Temperature	20
10 Reflow Profile	20
11 Package.....	21
12 Product Size (Unit: mm).....	22

1 Product Description

This Quectel embedded 4G FPC antenna covers main 4G LTE bands and is compatible with 3G/2G/LPWA bands. Featuring high efficiency and gain, it is an ideal antenna for a smooth and stable connection with high-efficiency data transmission even under the influence of the device's internal structure. Ground plane independent, it's designed to be mounted directly to the underside of either a plastic or non-metallic enclosure. Ease of integration with a cable and connector which can be customized to meet your product design and RF module.

2 Product Features

- Cellular LTE
- High efficiency
- Excellent performance



3 Product Specifications

Passive Electrical Specifications

Frequency Range	698–960 MHz, 1710–2690 MHz
Input Impedance	50 Ω
VSWR	≤ 4.0
Gain	≤ 3.0 dBi
Polarization Type	Linear

Mechanical Specifications

Antenna Size	35.0 mm (L) \times 8.5 mm (W) \times 3.0 mm (H)
Carrier	FR4
Connector Type	SMD
Working Temperature	-40 $^{\circ}$ C to +85 $^{\circ}$ C
Radome Color	Black

4 Overall Performance

4.1. Test Environment

- KEYSIGHT VNA Network Analyzer E5063A 100 kHz – 6.5 GHz.
- RayZone®2800 Chamber 5G (FR1) SISO/MIMO, 400 MHz – 6.0 GHz.



4.2 VSWR

- Board length 110 mm



Frequency (MHz)	698	960	1710	2170	2300	2690
VSWR	3.85	3.12	2.51	2.16	2.09	2.13

4.3 Return Loss



- Board length 110 mm



Frequency (MHz)	698	960	1710	2170	2300	2690
Return Loss	-4.54	-4.99	-13.12	-6.50	-14.55	-9.46

4.4 Efficiency



- Board length 110 mm

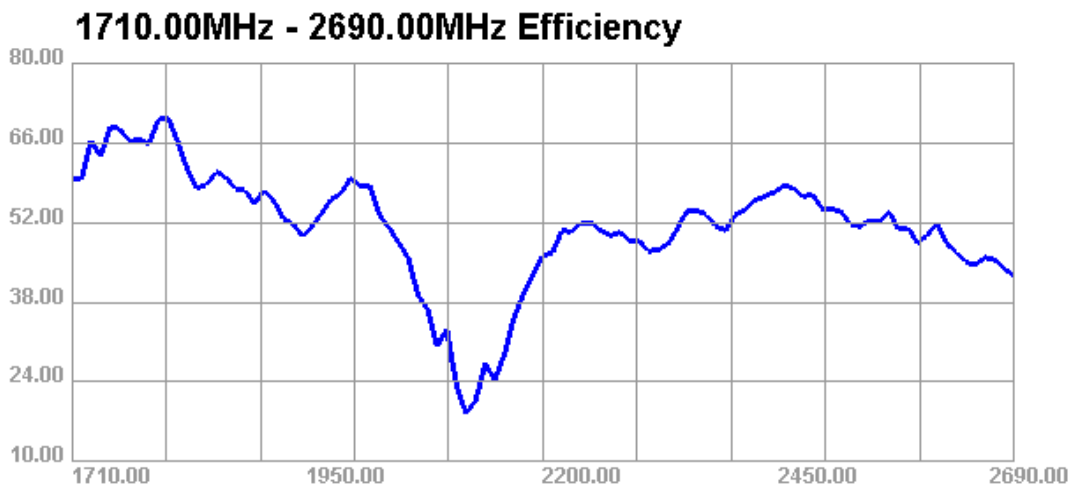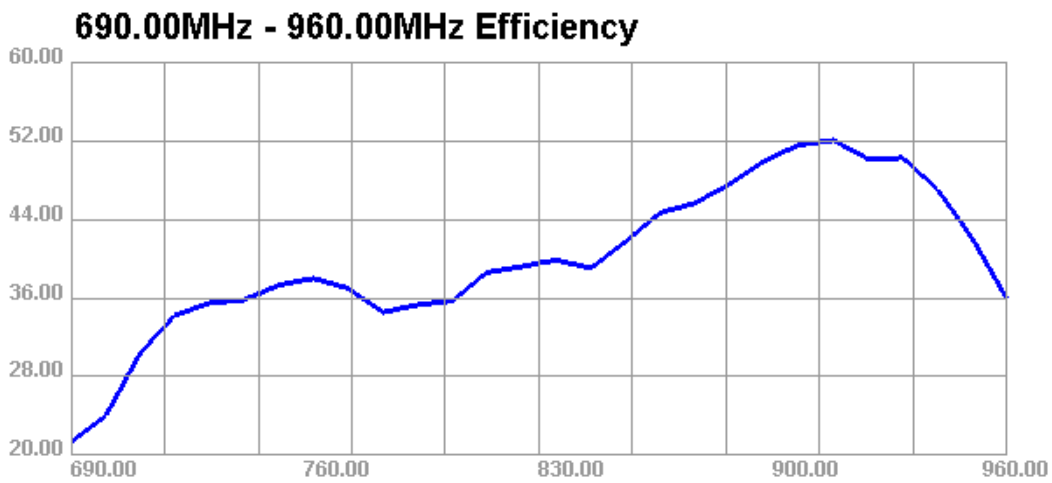

Frequency (MHz)	698	960	1710	2170	2300	2690
Efficiency (%)	21.4	36.0	59.8	35.3	48.8	42.7

4.5 Gain


- Board length 110 mm

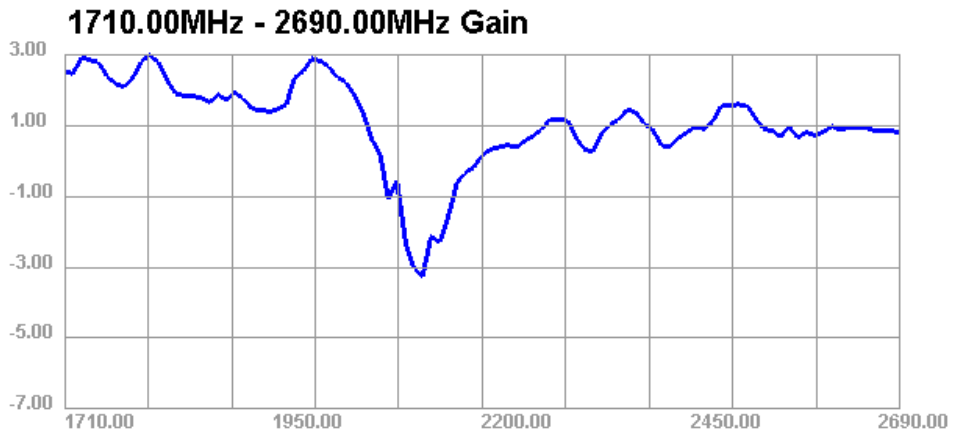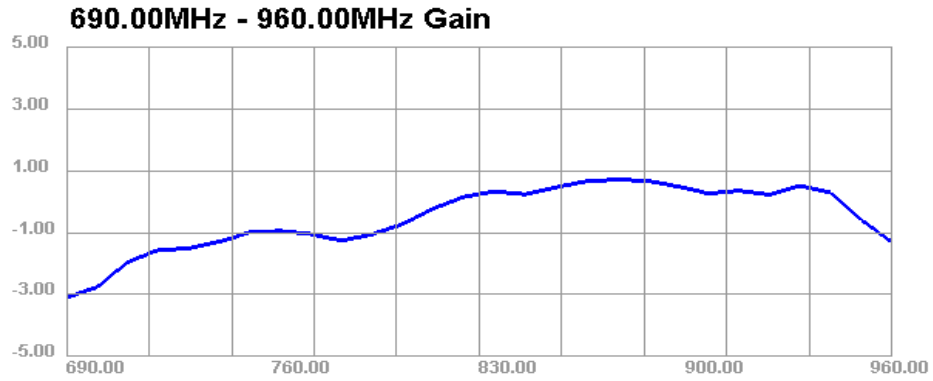


Frequency (MHz)	698	960	1710	2170	2300	2690
Gain (dBi)	-2.73	-1.20	1.97	-1.54	1.33	0.95


4.6 Radiation Patterns

- Board length 110 mm

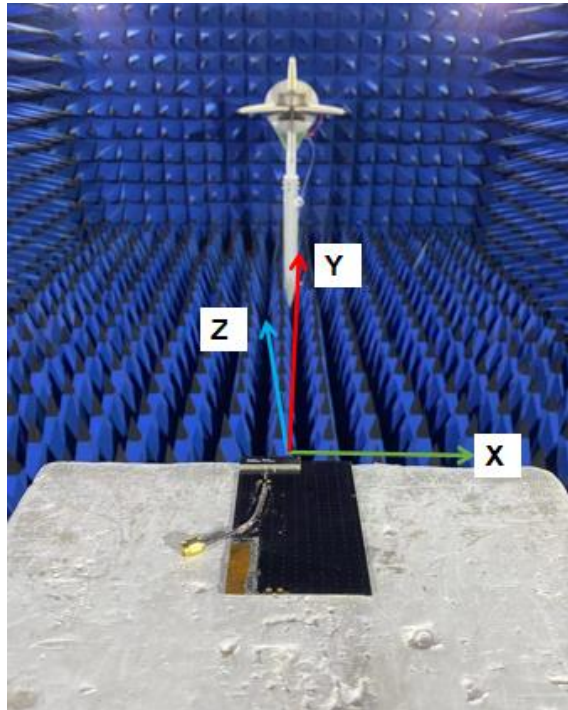


H plane: the tangent of XY
E1 plane: the tangent of XZ
E2 plane: the tangent of YZ

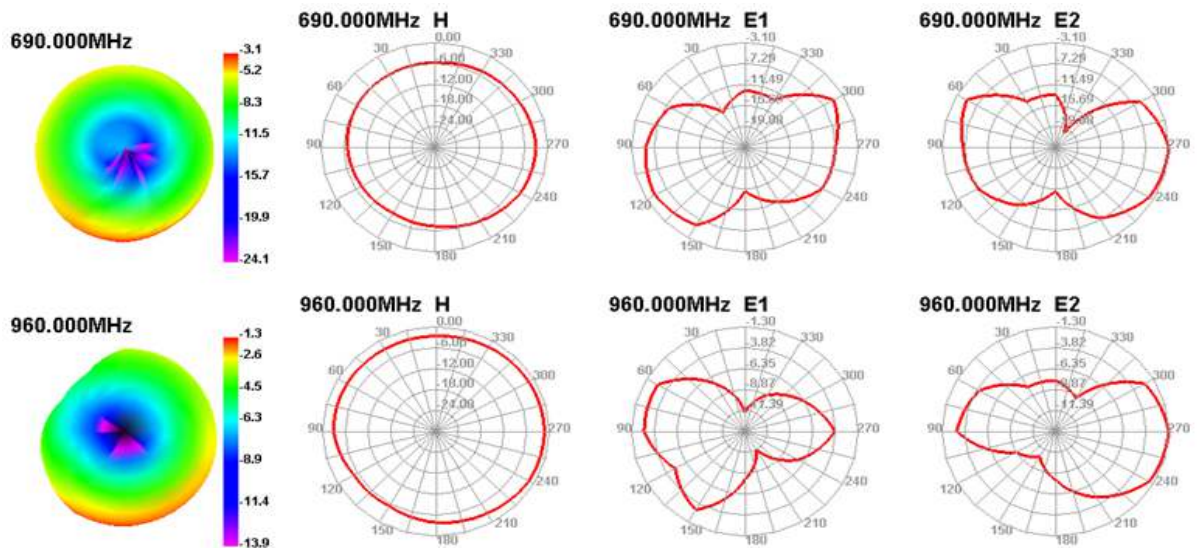

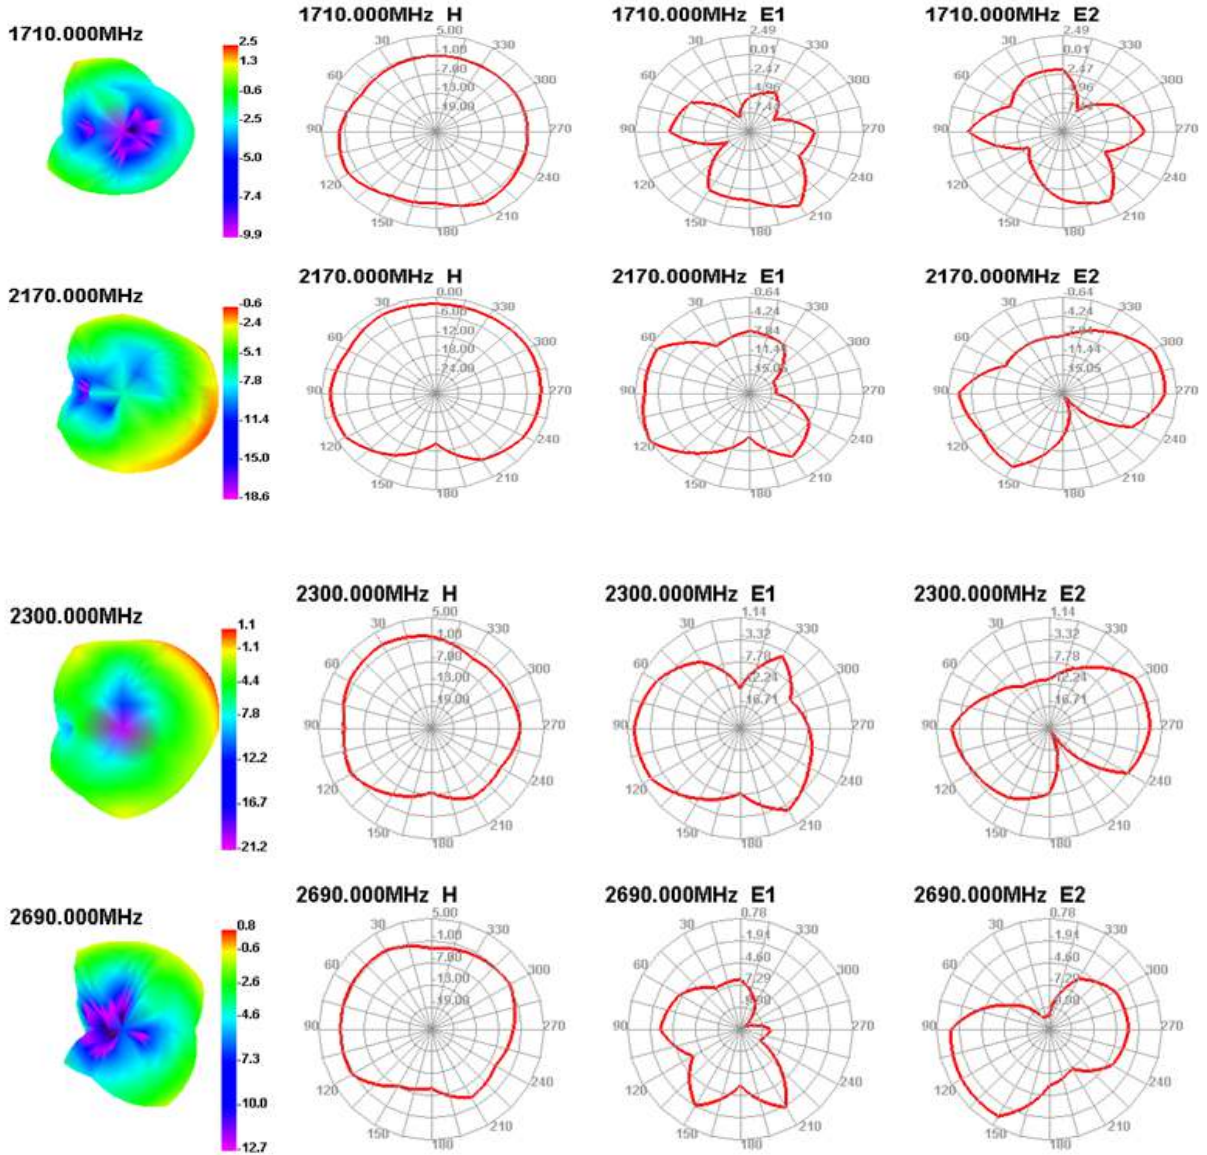

5 Schematic Symbol and Pin Definition

The pin assignment for the antenna is as follows. The antenna has 16 pins and only two work. All other pins are designed for mechanical strength.

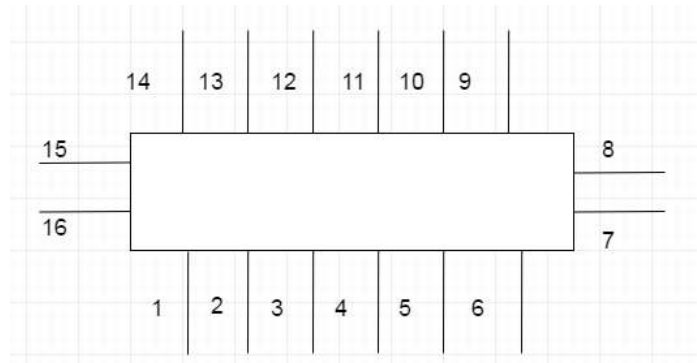


Pin No.	Description
3	Feed
4	Return/GND
1, 2, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16	Not used (mechanical only)


6 Transmission Line

The characteristic impedance of all transmission lines shall be designed as 50 Ω .


- The length of the transmission lines should be kept to as short as possible.
- Any other part of the RF system, such as transceiver, power amplifiers, etc., shall also be designed with an impedance of 50 Ω .

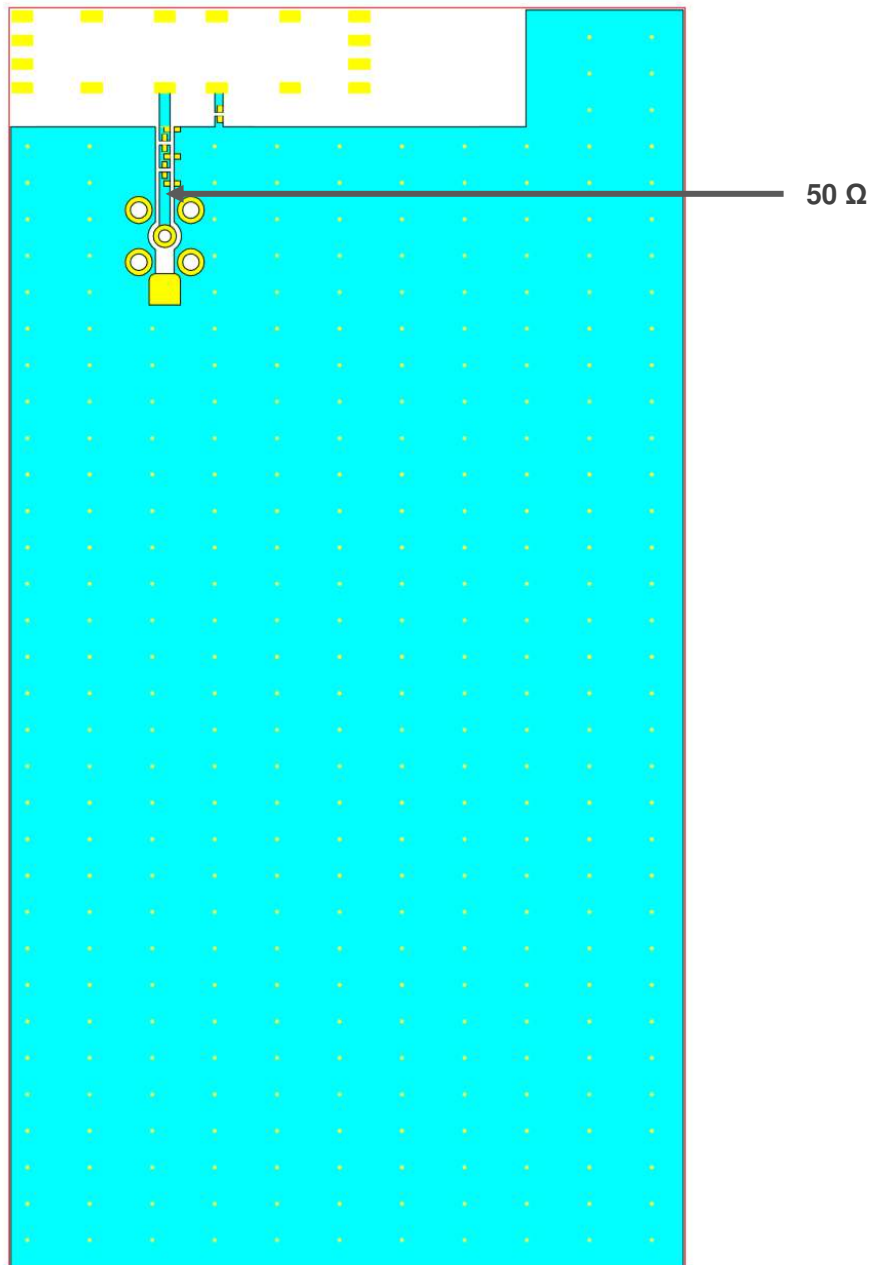

7 Matching Circuit

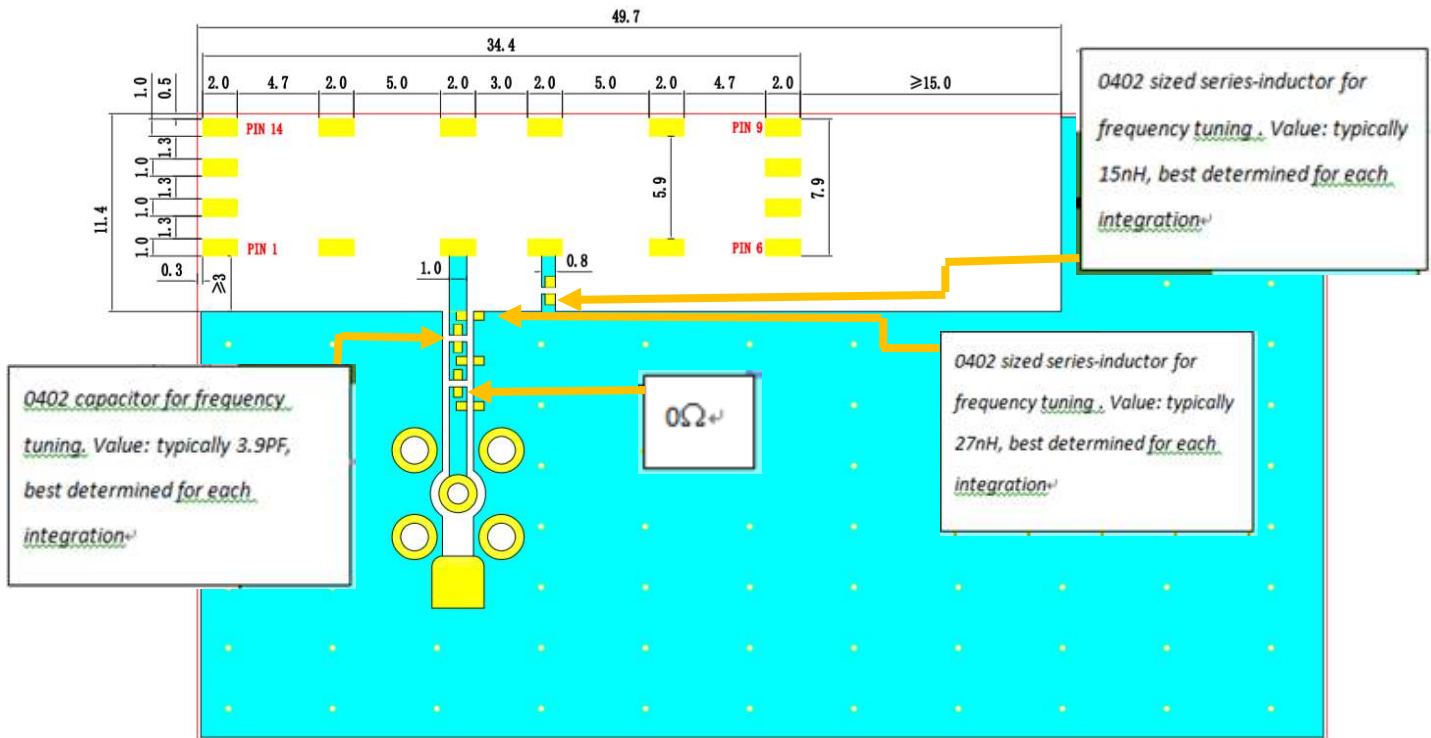

The antenna requires a matching circuit that must be optimized for each product. The matching circuit will require up to six components and the following circuit should be designed into the host PCB. Not all components may be required but should be included as a precaution. The matching network must be placed close to the antenna feed to ensure it is more effective in tuning the antenna.

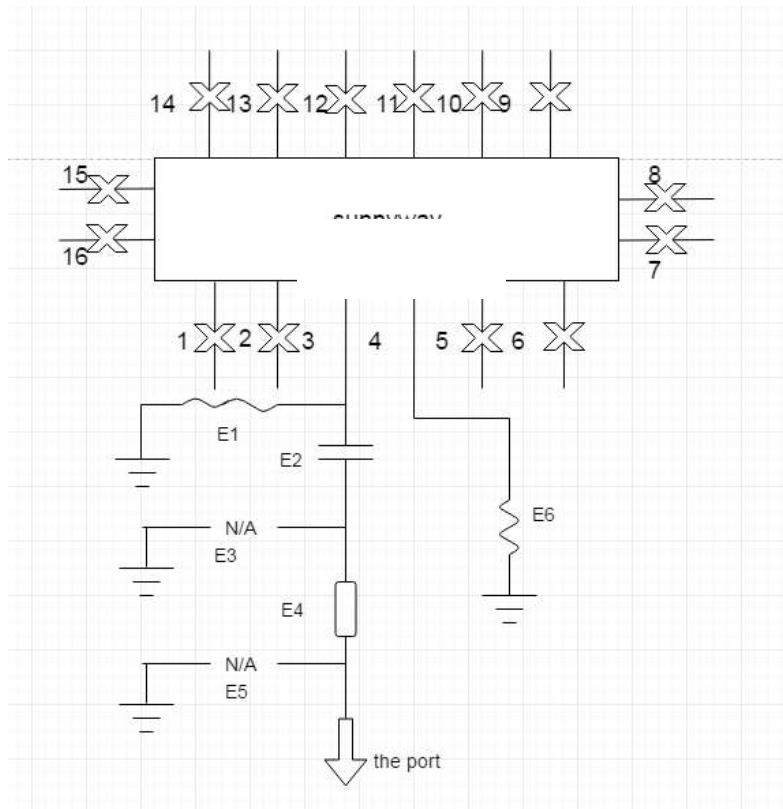


	Type	Value
E1	Inductor	27 nH
E2	Capacitor	3.9 pF
E3	-	-
E4	Capacitance	0 Ω
E5	-	-
E6	Inductor	15 nH


8 Host PCB Requirement

The printed circuit board of the host must ensure that the antenna clearance area meets the antenna specifications. It is suggested that putting the antenna in the corner of the PCB.

An example of a PCB layout shown as below:

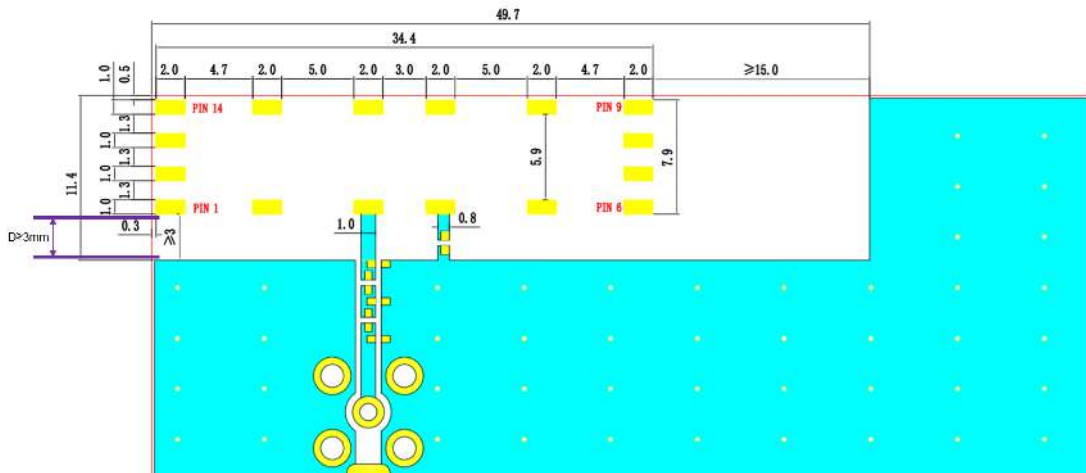

Gap D is required from the edge of the antenna to the ground plane. This should be maintained along the edge of the antenna placement, **minimum value is 3 mm**.

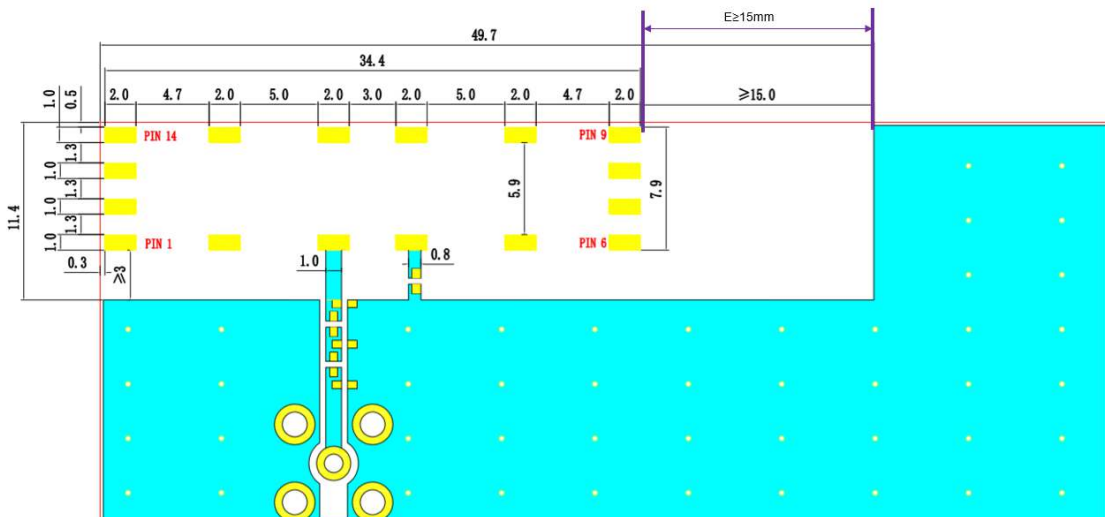


Gap E is required from the edge of the antenna to the ground plane or PCB traces, **minimum value is 15 mm**.

8.1. Host PCB Size

The performance of the low frequency section depends on the length of the ground plane. Reducing GND length will directly impact on the performance of low frequency band.



Taking antenna efficiency measurement results on different GND sizes as an example:

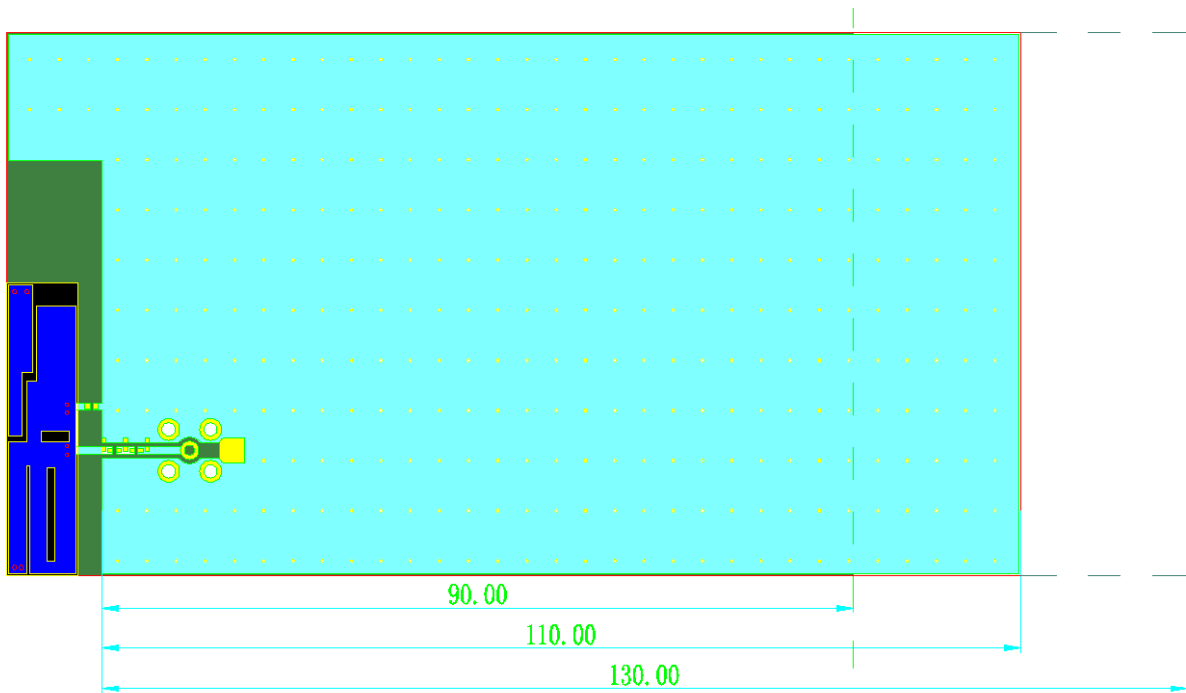



Passive Efficiency vs. PCB Length

Note: all results are measured in Quectel’s anechoic chamber.



- Board length 90 mm

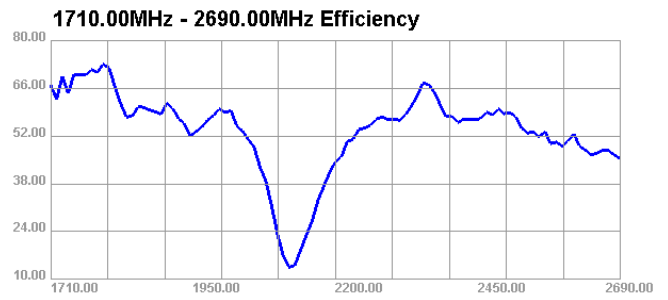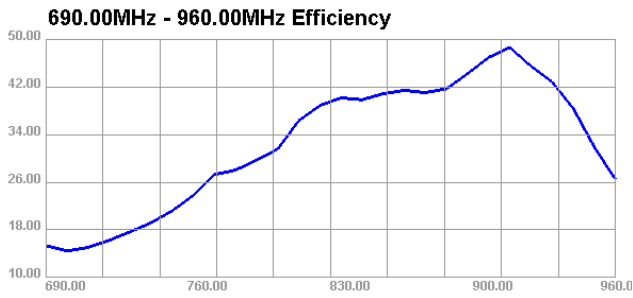

- Board length 110 mm

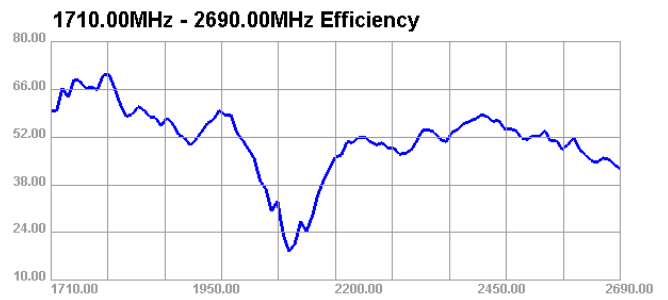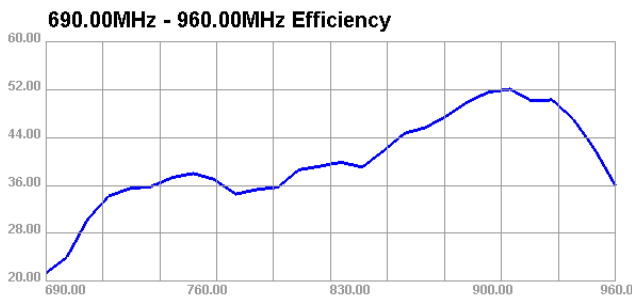


- Board length 130 mm

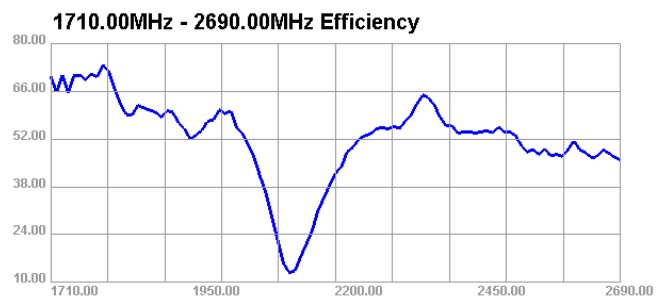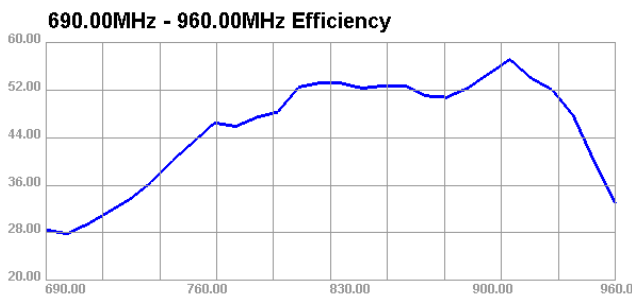

9 Soldering Temperature


Phase	Profile Features	PB-Free Assembly (Max.)
RAMP-UP	Avg. Ramp-up Rate (T _{smax} to T _p)	3 °C/second (Max.)
PREHEAT	Temperature Min. (T _{smin})	150 °C
	Temperature Max. (T _{smax})	180 °C
	Time (T _{smin} to T _{smax})	120 seconds (Max.)
REFLOW	Temperature (TL)	210 °C
	Total Time above TL (tl)	50 seconds (Max.)
PEAK	Temperature (T _p)	260 °C
	Time (t _p)	10 seconds (Max.)
RAMP-DOWN	Rate	5 °C/second (Max.)

10 Reflow Profile

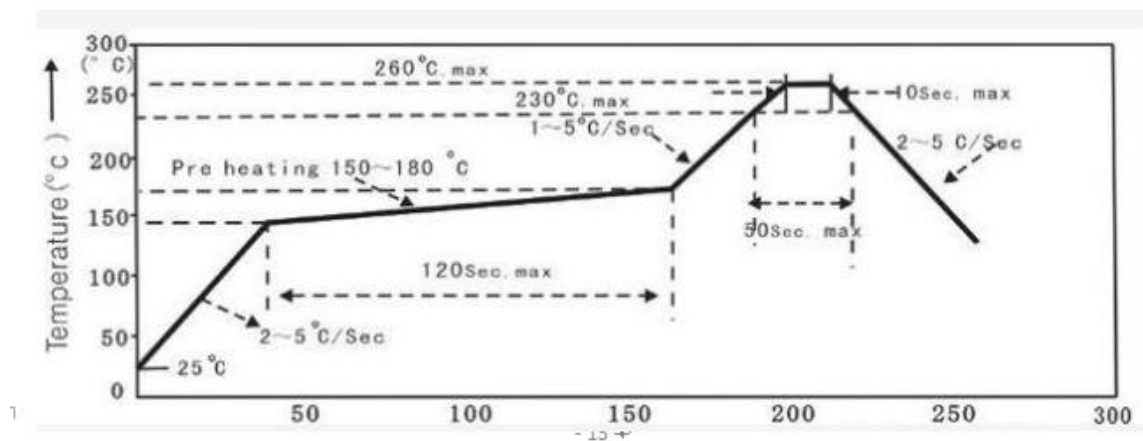


11 Package

- Quantity/Reel: 1000 pcs/Reel
- Carrier tape dimensions (mm)

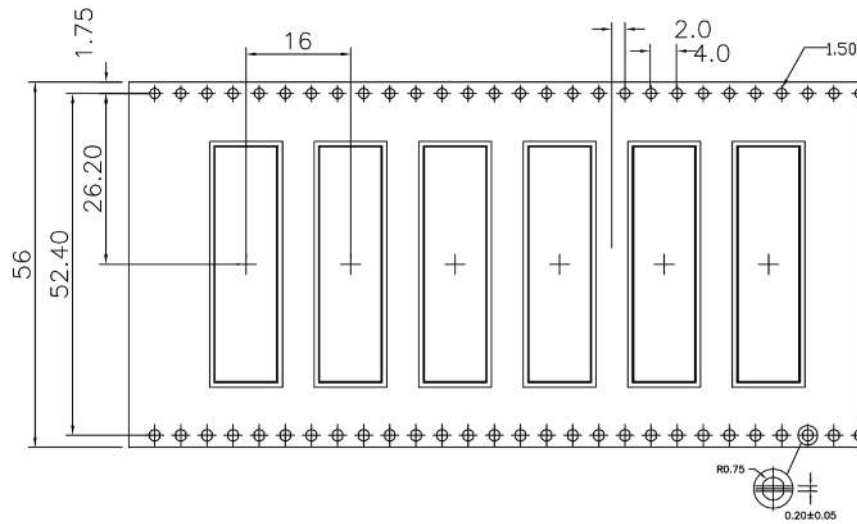

- Taping reel dimensions (mm)

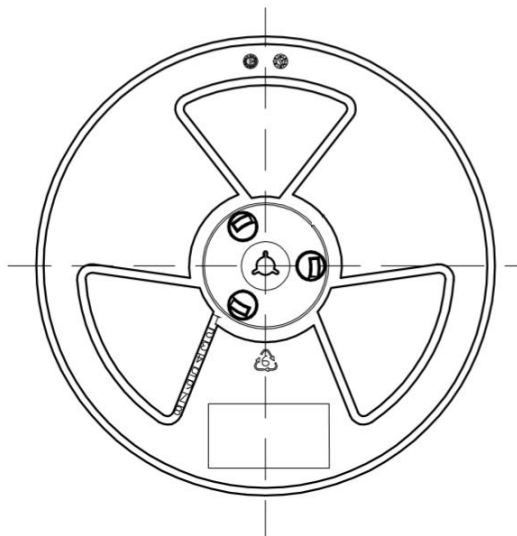

330 mm × 56.4 mm

12 Product Size (Unit: mm)

