






Features

- Ratings from 5A to 10A @ 24-280 VAC
- Triac Output
- LED Status Indicator
- UL Approved, CE Compliant to EN60950-1
- Improved SEMS screw and washer
- Redesigned housing with anti-rotation barriers
- AC or DC control
- EMC Compliant to Level 3
- Epoxy free design



Control Voltage	5A	10A	
3-32 VDC	CL240D05	CL240D10	
00 3E0 V/VC	CI 240 A 05	CI 240A10	

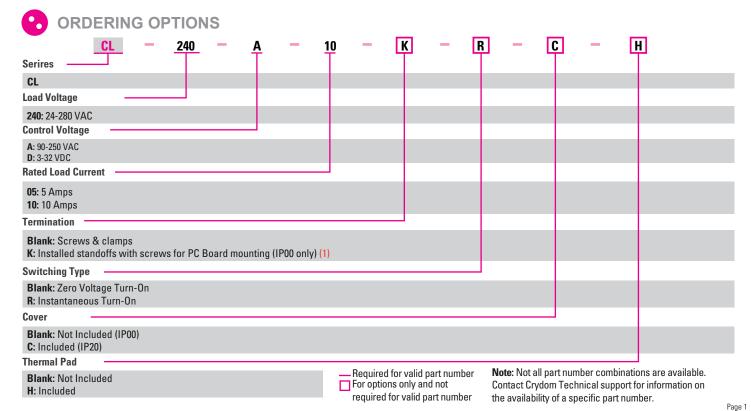



OUTPUT SPECIFICATIONS (2)

Description	5 A	10 A	
Operating Voltage (47-63Hz) [Vrms]	24-280	24-280	
Transient Overvoltage [Vpk] (3)	600	600	
Maximum Off-State Leakage Current @ Rated Voltage [mArms]	7	7	
Minimum Off-State dv/dt @ Maximum Rated Voltage [V/µsec]	500	500	
Maximum Load Current [Arms] (4)	5	10	
Minimum Load Current [mArms]	150	150	
Maximum 1 Cycle Surge Current (50/60Hz)[Apk]	84/100	120/126	
Maximum On-State Voltage Drop @ Rated Current [Vpk]	1.6	1.5	
Thermal Resistance Junction to Case (Rjc) [°C/W]	2.3	2.3	
Maximum 1/2 Cycle I ² t for Fusing (50/60Hz)[A ² sec]	35/42	72/66	
Minimum Power Factor (with Maximum Load)	0.5	0.5	
Minimum Heat Sink for Rated Current @ 40°C [°C/W]	3	1.5	

INPUT SPECIFICATIONS (2)

Description	DC Control	AC Control	
Control Voltage Range	3-32 VDC (5)	90-250 VAC	
Maximum Reverse Voltage	-32 VDC	-	
Minimum Turn-On Voltage	3 VDC	90 VAC	
Must Turn-Off Voltage	1 VDC	10 VAC	
Minimum Input Current (for on-state)	10 mA	6 mA	
Maximum Input Current	14 mA	10 mA	
Nominal Input Impedance	Current Limited	Current Limited	
Maximum Turn-On Time [msec]	1/2 Cycle (6)	20	
Maximum Turn-Off Time [msec]	1/2 Cycle	30	




GENERAL SPECIFICATIONS (2)

Description	Parameters	
Dielectric Strength, Input to Output (50/60Hz)	4000 Vrms	
Dielectric Strength, Input/Output to Ground (50/60Hz)	2500 Vrms	
Minimum Insulation Resistance (@ 500 VDC)	10 ⁹ Ohms	
Maximum Capacitance, Input/Output	8 pF	
Ambient Operating Temperature Range (7)	-40 to 80 °C	
Ambient Storage Temperature Range	-40 to 125 °C	
Weight (typical)	2.88 oz (81.53 g)	
Housing Material	UL94 V-0	
Baseplate Material	Aluminum	
Input Terminal Screw Torque Range (in-lb/Nm)	13-15 /1.5-1.7	
Load Terminal Screw Torque Range (in-lb/Nm)	18-20 / 2-2.2	
SSR Mounting Screw Torque Range (in-lb/Nm)	18-20 / 2-2.2	
Input/Load Terminal Screw Torque Range (in-lb/Nm) (1)	w/"K" option 8-10 / 0.9-1.13	
Input/Output Terminal Screw Thread Size	#6-32 UNC / #8-32 UNC	
Humidity per IEC60068-2-78	93% non-condensing	
LED Input Status Indicator	Green	
MTBF (Mean Time Between Failures) at 40°C ambient temperature (8)	11,641,553 hours (1,328 years)	
MTBF (Mean Time Between Failures) at 60°C ambient temperature (8)	7,210,376 hours (823 years)	



WIRING DIAGRAM




Recommended Wire Sizes			
Terminals	Wire Size (Solid / Stranded)	Wire Pull-Out Strength (lbs)[N]	
Input	24 AWG (0.2 mm²) / 0.2 [minimum]	10 [44.5]	
пірис	2 x 12 AWG (3.3 mm²) / 3.3 [maximum]	90 [400]	
	20 AWG (0.5 mm²) / 0.518 [minimum]	30 [133]	
Output	2 x 10 AWG (5.3 mm ²) / 5.3	110 [490]	
	2 x 8 AWG (8.4 mm²) / 8.4 [maximum]	90 [400]	




EQUIVALENT CIRCUIT BLOCK DIAGRAMS

CL Series DC Control OC 4 Trigger Circuit OC 3 Current Limiter

Standard Regulated "DC" Inputs 14 12 10 10 10 15 10 15 20 25 30 DC Input Voltage







MECHANICAL SPECIFICATIONS (2)

Tolerances: ±0.02 in / 0.5 mm All dimensions are in: inches [millimeters]


Screw Termination



Hex Standoff Termination ("K" Option)(1)




Screw Termination, IP20

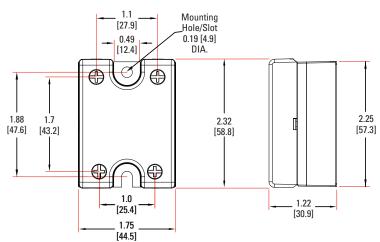

SURGE CURRENT INFORMATION


--- Single Pulse (10)

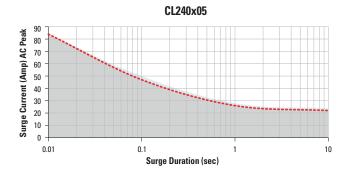




THERMAL DERATE INFORMATION

(i) SSR metal base plate acting as heat sink, it must be exposed to free ambient air.





ACCESORIES

Protective Cover & Hardware Kits

Protective Cover

Part number: KS101



Clear plastic cover compatible with all new S1 designs. Safety covers provide added protection from electric shock when installing or checking equipment.

Hardware Kit

Part number: HK4



Bag with 2 square brass accessories and 2 screw 8-32 x 5/8 for output. Used to mount TMR1 lug terminals.

Recommended Accessories					
* the					
Cover	Hardware Kit	Heat Sink Part No.	Thermal Resistance [°C/W]	Lug Terminal	Thermal Pad
KS101	HK1	HS501DR	_ 5.0	TRM1	HSP-1
	HK4	HS301 / HS301DR	3.0	TRM6	HSP-2
		HS251	2.5		
		HS201 / HS201DR	2.0		
		HS202 / HS202DR	2.0		
		HS172	1.7		
		HS151 / HS151DR	1.5		
		HS122 / HS122DR	1.2		
		HS103/HS103DR	1.0		
		HS101	1.0		
		HS073	0.7		
		HS072	0.7		
		HS053	0.5		
		HS033	0.36		
		HS023	0.25		

Page 4



EN60950-1: Meets the requirements of sections1.5: 1,7: 2.9: 2.10.5.3: 4.2: 4.5: 4.7:

IEC 61000-4-2 Electrostatic Discharge Level 3 IEC 61000-4-4 Electrically Fast Transients Level 3

IEC 61000-4-5 Electrical Surges Level 3









- (1) Option "K" is designed and tested for use with printed circuit boards or ring/fork terminals having a thickness between 0.031 and 0.093 inches (0.79 to 2.36 mm).
- (2) All parameters at 25°C unless otherwise specified.
- (3) Output will self trigger between 450-600Vpk, not suituable for capacitive loads.
- (4) Heat sinking required, see derating curves.
- (5) Increase minimum voltage by 1V for operations from -20 to -40°C.
- (6) Turn-on time for instantaneous turn-on versions is 0.1 msec.
- (7) AC models operating range is -20 to 80 °C.
- (8) All parameters at 50% power rating and 100% duty cycle (contact Crydom tech support for detailed report).
- (9) Load can be wired to either SSR output terminal 1 or 2.
- (10) For single surge pulse Tc=25°C; Tj=125°C. For AC Output SSRs, AC Rms value of surge current equals the peak value divided by √2 (1.414).

For additional information or specific questions, contact Crydom Technical Support.





RISK OF MATERIAL DAMAGE AND HOT ENCLOSURE

- The product's side panels may be hot, allow the product to cool before touching.
- Follow proper mounting instructions including torque values.
- . Do not allow liquids or foreign objects to enter this product.

Failure to follow these instructions can result in serious injury, or equipment damage.



HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH

- Disconnect all power before installing or working with this equipment.
- Verify all connections and replace all covers before turning on power.

Failure to follow these instructions will result in death or serious injury.

Page 5

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE. EXPRESS OR IMPLIED. BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT. AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTARILITY FITNESS FOR A PARTICULAR PURPOSE. OLUET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

CONTACT US

+1 (877) 502 5500 - Option 2 sales.crydom@sensata.com **Europe, Middle East & Africa**

+44 (1202) 416170

ssr-info.eu@sensata.com

Asia Pacific

sales.isasia@list.sensata.com China +86 (21) 2306 1500 Japan +81 (45) 277 7117 Korea +82 (31) 601 2004 India +91 (80) 67920890 Rest of Asia +886 (2) 27602006 ext 2808