

**36 V, 0.8% Accuracy, 300 mA, Voltage Regulator for Automotive Applications**

NO.EC-321-190829

**OUTLINE**

The R1513S is a CMOS-based voltage regulator (VR) that specifically designed for automotive applications featuring 300 mA output current and 36 V input voltage. Internally, the R1513S consists of a fold-back protection circuit, a short current protection circuit and a thermal shutdown circuit in addition to the basic regulator circuit.

The performance is specified for 25°C with  $\pm 0.8\%$  output voltage accuracy and for the -40°C to 125°C temperature range with  $\pm 1.0\%$  output voltage accuracy. The operating temperature range is -40°C to 125°C and the maximum input voltage is 36 V. All these features make the R1513S ideal for power source for car accessories and electronic control units in automotive vehicles.

The R1513S is available in 1.2 V, 1.5 V, 1.8 V, 3.3 V, 3.4 V and 5.0 V fixed output voltage options. By using external divider resistors, the output voltage can be set over a 1.2 V to 18.0 V range.



The R1513S is offered in a 6-pin HSOP-6J high wattage package.

**FEATURES**

- Input Voltage (Maximum Ratings) ..... 3.5 V to 36 V (50 V)
- Operating Temperature Range ..... -40°C to 125°C
- Supply Current ..... Typ. 75  $\mu$ A
- Standby Current ..... Typ. 0.1  $\mu$ A
- Dropout Voltage ..... Typ. 0.32 V ( $I_{OUT} = 300$  mA,  $V_{OUT} = 5.0$  V)
- Output Voltage Accuracy .....  $\pm 0.8\%$  ( $T_a = 25^\circ C$ )  
 $\pm 1.0\%$  (-40°C to 125°C)
- Line Regulation ..... Typ. 0.01%/V ( $V_{DD} = V_{OUT} + 1$  V to 36 V)
- Package Type ..... HSOP-6J
- Output Voltage ..... 1.2 V / 1.5 V / 1.8 V / 3.3 V / 3.4 V / 5.0 V
- Short-current Protection Circuit ..... Current Limit Typ. 50 mA
- Fold-back Protection Circuit ..... Current Limit Typ. 450 mA
- Thermal Shutdown Circuit ..... Shutdown at Typ. 160°C
- Ripple Rejection ..... Typ. 70 dB ( $f = 100$  Hz)
- Ceramic Capacitor Compatible .....  $C_1 = 1.0 \mu F$  or more,  $C_2 = 4.7 \mu F$  or more

**APPLICATIONS**

- Power source for car accessories including car audio equipment, car navigation system, and ETC system.
- Power source for control units including EV inverter and charge control.

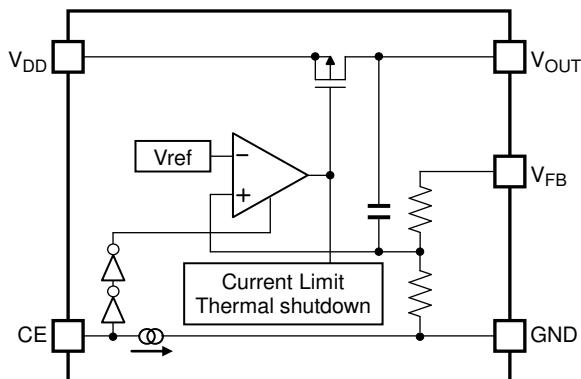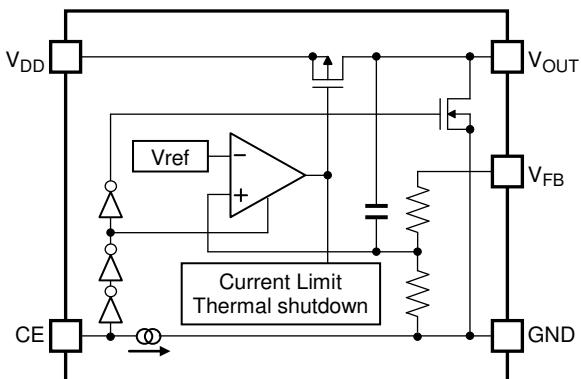**BLOCK DIAGRAM****R1513SxxxB Block Diagram****R1513SxxxD Block Diagram****SELECTION GUIDE**

The set output voltage and the auto-discharge option<sup>\*1</sup> are user-selectable options.

**Selection Guide**

<b>Product Name</b>	<b>Package</b>	<b>Quantity per Reel</b>	<b>Pb Free</b>	<b>Halogen Free</b>
R1513Sxx1*-E2-#E	HSOP-6J	1,000 pcs	Yes	Yes

xx: Specify the set output voltage ( $V_{SET}$ ) from below.  
 1.2 V (12) / 1.5 V (15) / 1.8 V (18) / 3.3 V (33) / 3.4 V (34) / 5.0 V (50)


\*: Specify the auto-discharge option.  
 B: Auto-discharge option not included  
 D: Auto-discharge option included

#: Specify the automotive class code.

	<b>Operating Temperature Range</b>	<b>Guaranteed Specs Temperature Range</b>	<b>Screening</b>
A	-40°C to 125°C	25°C	High Temperature
K	-40°C to 125°C	-40°C to 125°C	High and Low Temperature

<sup>\*1</sup> Auto-discharge function quickly lowers the output voltage to 0 V, when the chip enable signal is switched from the active mode to the standby mode, by releasing the electrical charge accumulated in the external capacitor.

## PIN DESCRIPTION



**HSOP-6J Pin Configuration**

### HSOP-6J Pin Description

Pin No.	Symbol	Description
1	$V_{OUT}$	Output Pin
2	GND <sup>*1</sup>	Ground Pin
3	$V_{FB}$	Feedback Pin
4	CE	Chip Enable Pin, Active-high
5	GND <sup>*1</sup>	Ground Pin
6	$V_{DD}$	Input Pin

\*1 The GND pins must be wired together when they are mounted on board.

## ABSOLUTE MAXIMUM RATINGS

### Absolute Maximum Ratings

Symbol	Item		Rating	Unit
$V_{IN}$	Input Voltage		-0.3 to 50	V
$V_{IN}$	Peak Input Voltage <sup>*1</sup>		60	V
$V_{CE}$	CE Pin Input Voltage		-0.3 to 50	V
$V_{FB}$	$V_{FB}$ Pin Input Voltage		-0.3 to $V_{OUT} + 0.3 \leq 50$	V
$V_{OUT}$	Output Voltage		-0.3 to $V_{IN} + 0.3 \leq 50$	V
$P_D$	Power Dissipation <sup>*2</sup>	Ultra High Wattage Land Pattern	3400	mW
		Standard Land Pattern	2100	
$T_j$	Junction Temperature		-40 to 150	°C
$T_{stg}$	Storage Temperature Range		-55 to 150	°C

<sup>\*1</sup> Duration time = 200 ms

<sup>\*2</sup> Refer to *PACKAGE INFORMATION* for detailed information.

### ABSOLUTE MAXIMUM RATINGS

Electronic and mechanical stress momentarily exceeded absolute maximum ratings may cause permanent damage and may degrade the life time and safety for both device and system using the device in the field. The functional operation at or over these absolute maximum ratings is not assured.

## RECOMMENDED OPERATING CONDITIONS

### Recommended Operating Conditions

Symbol	Item	Rating	Unit
$V_{IN}$	Input Voltage	3.5 to 36	V
$T_a$	Operating Temperature Range	-40 to 125	°C

### RECOMMENDED OPERATING CONDITIONS

All of electronic equipment should be designed that the mounted semiconductor devices operate within the recommended operating conditions. The semiconductor devices cannot operate normally over the recommended operating conditions, even if they are used over such conditions by momentary electronic noise or surge. And the semiconductor devices may receive serious damage when they continue to operate over the recommended operating conditions.

## ELECTRICAL CHARACTERISTICS

C1 = 1.0  $\mu\text{F}$ , C2 = 4.7  $\mu\text{F}$ , V<sub>OUT</sub> = V<sub>FB</sub>, V<sub>SET</sub> = Set Output Voltage, unless otherwise noted.

The specifications surrounded by  are guaranteed by design engineering at  $-40^\circ\text{C} \leq \text{Ta} \leq 125^\circ\text{C}$ .

### R1513SxxxB/D (-AE) Electrical Characteristics

(Ta = 25°C)

Symbol	Item	Conditions	Min.	Typ.	Max.	Unit
I <sub>SS</sub>	Supply Current	V <sub>IN</sub> = 14 V, I <sub>OUT</sub> = 0 mA		75	<input type="checkbox"/> 110	$\mu\text{A}$
I <sub>Standby</sub>	Standby Current	V <sub>IN</sub> = 36 V, V <sub>CE</sub> = 0 V		0.1	<input type="checkbox"/> 2.0	$\mu\text{A}$
V <sub>OUT</sub>	Output Voltage	3.5 V ≤ V <sub>SET</sub> + 1 V ≤ V <sub>IN</sub> ≤ 36 V, I <sub>OUT</sub> = 1 mA	V <sub>SET</sub> ≤ 1.8 V <input type="checkbox"/> -18	<input type="checkbox"/> 18	mV	
			1.8 V < V <sub>SET</sub> <input type="checkbox"/> ×0.99	<input type="checkbox"/> ×1.01	V	
		3.5 V ≤ V <sub>SET</sub> + 1 V ≤ V <sub>IN</sub> ≤ 14 V, 1 mA ≤ I <sub>OUT</sub> ≤ 50 mA	V <sub>SET</sub> ≤ 1.8 V <input type="checkbox"/> -18	<input type="checkbox"/> 18	mV	
			1.8 V < V <sub>SET</sub> <input type="checkbox"/> ×0.99	<input type="checkbox"/> ×1.01	V	
$\Delta V_{\text{OUT}} / \Delta V_{\text{IN}}$	Line Regulation	3.5 V ≤ V <sub>SET</sub> + 1 V ≤ V <sub>IN</sub> ≤ 36 V I <sub>OUT</sub> = 1 mA	<input type="checkbox"/> -0.02	0.01	<input type="checkbox"/> 0.02	%/V
$\Delta V_{\text{OUT}} / \Delta I_{\text{OUT}}$	Load Regulation	3.5V ≤ V <sub>IN</sub> = V <sub>SET</sub> + 1 V, 1 mA ≤ I <sub>OUT</sub> ≤ 300 mA	V <sub>SET</sub> ≤ 1.8 V <input type="checkbox"/> -5	<input type="checkbox"/> 5	mV	
			V <sub>SET</sub> = 3.3 V <input type="checkbox"/> -8	<input type="checkbox"/> 8		
			V <sub>SET</sub> = 5.0 V <input type="checkbox"/> -12	<input type="checkbox"/> 12		
V <sub>DIF</sub>	Dropout Voltage	I <sub>OUT</sub> = 300 mA	V <sub>SET</sub> = 1.2 V		<input type="checkbox"/> 2.30	V
			1.5V ≤ V <sub>SET</sub>		<input type="checkbox"/> 2.00	
			1.8V ≤ V <sub>SET</sub>		<input type="checkbox"/> 1.70	
			3.3V ≤ V <sub>SET</sub>	0.39	<input type="checkbox"/> 0.74	
			5.0V ≤ V <sub>SET</sub>	0.32	<input type="checkbox"/> 0.60	
I <sub>LIM</sub>	Output Current Limit	V <sub>IN</sub> = V <sub>SET</sub> + 1.5 V	<input type="checkbox"/> 300	450		$\text{mA}$
I <sub>SC</sub>	Short Current Limit	V <sub>OUT</sub> = 0 V	<input type="checkbox"/> 40	50		$\text{mA}$
R <sub>FB</sub>	Feedback Resistance		<input type="checkbox"/> 1.0	2.4		$\text{M}\Omega$
V <sub>CEH</sub>	CE Input Voltage "H"		<input type="checkbox"/> 2.2		<input type="checkbox"/> 36	V
V <sub>CEL</sub>	CE Input Voltage "L"		<input type="checkbox"/> 0		<input type="checkbox"/> 1.0	V
I <sub>PD</sub>	CE Pull-down Current	V <sub>CE</sub> = 5.0 V		0.2	<input type="checkbox"/> 0.6	$\mu\text{A}$
		V <sub>CE</sub> = 36 V		0.5	<input type="checkbox"/> 1.3	
T <sub>TSD</sub>	Thermal Shutdown Temperature	Junction Temperature	<input type="checkbox"/> 150	160		$^\circ\text{C}$
T <sub>TSR</sub>	Thermal Shutdown Released Temperature	Junction Temperature	<input type="checkbox"/> 125	135		$^\circ\text{C}$
R <sub>LOW</sub>	Low Output Nch Tr. ON Resistance (R1513SxxxD)	V <sub>IN</sub> = 14.0 V, V <sub>CE</sub> = 0 V	<input type="checkbox"/> 1.5	3.2	<input type="checkbox"/> 6.7	k $\Omega$

All test items listed under *Electrical Characteristics* are done under the pulse load condition (T<sub>j</sub> ≈ Ta = 25°C).

## R1513S

NO.EC-321-190829

The specifications surrounded by  are guaranteed by design engineering at  $-40^{\circ}\text{C} \leq \text{Ta} \leq 125^{\circ}\text{C}$ .

### Product-specific Electrical Characteristics (-AE)

( $\text{Ta} = 25^{\circ}\text{C}$ )

Product Name	$V_{\text{OUT}}$ [V]			$\Delta V_{\text{OUT}}/\Delta I_{\text{OUT}}$ [mV]		$V_{\text{DIF}}$ [V]	
	MIN.	TYP.	MAX.	MIN.	MAX.	TYP.	MAX.
R1513S121x	<input type="checkbox"/> 1.182	1.200	<input type="checkbox"/> 1.218	<input type="checkbox"/> -5	<input type="checkbox"/> 5		<input type="checkbox"/> 2.30
R1513S151x	<input type="checkbox"/> 1.482	1.500	<input type="checkbox"/> 1.518	<input type="checkbox"/> -5	<input type="checkbox"/> 5		<input type="checkbox"/> 2.00
R1513S181x	<input type="checkbox"/> 1.782	1.800	<input type="checkbox"/> 1.818	<input type="checkbox"/> -5	<input type="checkbox"/> 5		<input type="checkbox"/> 1.70
R1513S331x	<input type="checkbox"/> 3.267	3.300	<input type="checkbox"/> 3.333	<input type="checkbox"/> -8	<input type="checkbox"/> 8	0.39	<input type="checkbox"/> 0.74
R1513S341x	<input type="checkbox"/> 3.366	3.400	<input type="checkbox"/> 3.434	<input type="checkbox"/> -8	<input type="checkbox"/> 8	0.39	<input type="checkbox"/> 0.74
R1513S501x	<input type="checkbox"/> 4.950	5.000	<input type="checkbox"/> 5.050	<input type="checkbox"/> -12	<input type="checkbox"/> 12	0.32	<input type="checkbox"/> 0.60

$C_1 = 1.0 \mu F$ ,  $C_2 = 4.7 \mu F$ ,  $V_{OUT} = V_{FB}$ ,  $V_{SET}$  = Set Output Voltage, unless otherwise noted.

### R1513SxxxB/D (-KE) Electrical Characteristics

( $-40^\circ C \leq T_a \leq 125^\circ C$ )

Symbol	Item	Conditions	Min.	Typ.	Max.	Unit
$I_{SS}$	Supply Current	$V_{IN} = 14 V$ , $I_{OUT} = 0 mA$		75	110	$\mu A$
$I_{STANDBY}$	Standby Current	$V_{IN} = 36 V$ , $V_{CE} = 0 V$		0.1	2.0	$\mu A$
$V_{OUT}$	Output Voltage	$3.5 V \leq V_{SET} + 1 V \leq V_{IN} \leq 36 V$ , $I_{OUT} = 1 mA$	$V_{SET} \leq 1.8 V$	-18	18	$mV$
			$1.8 V < V_{SET}$	$\times 0.99$	$\times 1.01$	$V$
		$3.5 V \leq V_{SET} + 1 V \leq V_{IN} \leq 14 V$ , $1 mA \leq I_{OUT} \leq 50 mA$	$V_{SET} \leq 1.8 V$	-18	18	$mV$
			$1.8 V < V_{SET}$	$\times 0.99$	$\times 1.01$	$V$
$\Delta V_{OUT} / \Delta V_{IN}$	Line Regulation	$3.5 V \leq V_{SET} + 1 V \leq V_{IN} \leq 36 V$ $I_{OUT} = 1 mA$		-0.02	0.01	0.02
$\Delta V_{OUT} / \Delta I_{OUT}$	Load Regulation	$3.5 V \leq V_{IN} = V_{SET} + 1 V$ , $1 mA \leq I_{OUT} \leq 300 mA$	$V_{SET} \leq 1.8 V$	-5	5	$mV$
			$V_{SET} = 3.3 V$	-8	8	
			$V_{SET} = 5.0 V$	-12	12	
$V_{DIF}$	Dropout Voltage	$I_{OUT} = 300 mA$	$V_{SET} = 1.2 V$		2.30	$V$
			$1.5V \leq V_{SET}$		2.00	
			$1.8V \leq V_{SET}$		1.70	
			$3.3V \leq V_{SET}$	0.39	0.74	
			$5.0V \leq V_{SET}$	0.32	0.60	
$I_{LIM}$	Output Current Limit	$V_{IN} = V_{SET} + 1.5 V$	300	450		$mA$
$I_{SC}$	Short Current Limit	$V_{OUT} = 0 V$	40	50		$mA$
$R_{FB}$	Feedback Resistance		1.0	2.4		$M\Omega$
$V_{CEH}$	CE Input Voltage "H"			2.2	36	$V$
$V_{CEL}$	CE Input Voltage "L"			0	1.0	$V$
$I_{PD}$	CE Pull-down Current	$V_{CE} = 5.0 V$		0.2	0.6	$\mu A$
		$V_{CE} = 36 V$		0.5	1.3	
$T_{TSD}$	Thermal Shutdown Temperature	Junction Temperature	150	160		$^\circ C$
$T_{TSR}$	Thermal Shutdown Released Temperature	Junction Temperature	125	135		$^\circ C$
$R_{LOW}$	Low Output Nch Tr. ON Resistance (R1513SxxxD)	$V_{IN} = 14.0 V$ , $V_{CE} = 0 V$	1.5	3.2	6.7	$k\Omega$

## R1513S


NO.EC-321-190829

### Product-specific Electrical Characteristics (-KE)

( $-40^{\circ}\text{C} \leq \text{Ta} \leq 125^{\circ}\text{C}$ )

Product Name	V <sub>OUT</sub> [V]			$\Delta V_{\text{OUT}}/\Delta I_{\text{OUT}}$ [mV]		V <sub>DIF</sub> [V]	
	MIN.	TYP.	MAX.	MIN.	MAX.	TYP.	MAX.
R1513S121x	1.182	1.200	1.218	-5	5		2.30
R1513S151x	1.482	1.500	1.518	-5	5		2.00
R1513S181x	1.782	1.800	1.818	-5	5		1.70
R1513S331x	3.267	3.300	3.333	-8	8	0.39	0.74
R1513S341x	3.366	3.400	3.434	-8	8	0.39	0.74
R1513S501x	4.950	5.000	5.050	-12	12	0.32	0.60

## TYPICAL APPLICATION

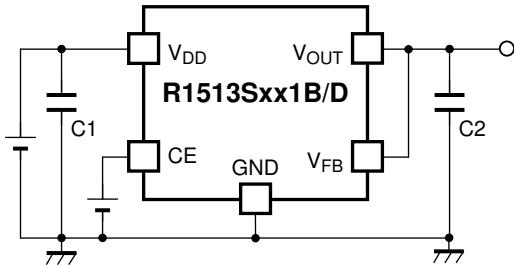

**R1513S Typical Application**

### External Components List

Symbol	Description
C1	1.0 $\mu$ F, Ceramic Capacitor
C2	4.7 $\mu$ F, Ceramic Capacitor

## TECHNICAL NOTES

### Phase Compensation

Phase compensation is provided to secure stable operation even when the load current is varied. For this purpose, use a 4.7  $\mu$ F or more output capacitor (C2) with good frequency characteristics and proper ESR (Equivalent Series Resistance). Connect a 1.0  $\mu$ F or more input capacitor (C1) between the V<sub>DD</sub> pin and the GND pin as close as possible to the pins.

In case of using a tantalum type capacitor with a large ESR, the output might become unstable. Evaluate your circuit including consideration of frequency characteristics.

Depending on the capacitor size, manufacturer, and part number, the bias characteristics and the temperature characteristics vary.

### PCB Layout

Ensure the V<sub>DD</sub> and GND lines are sufficiently robust. If their impedance is too high, noise pickup or unstable operation may result. No. 2 pin and No.5 pin must be wired together when mounting on board. Connect a capacitor with a suitable value between the V<sub>DD</sub> and GND pins, and as close as possible to the pins. The load regulation can be improved by short-circuiting V<sub>OUT</sub> and V<sub>FB</sub> close to the load device.

## Thermal Shutdown Function

Thermal shutdown function detects overheating of the regulator and stops the regulator operation to protect the device from damage. Thermal shutdown circuit stops the regulator operation if the junction temperature becomes higher than 160°C (Typ.) and restarts the regulator operation if the junction temperature drops below 135°C (Typ.). The regulator repeats turning on and off and creates pulse waveform until the cause of the overheating is removed.


## Adjustable Output Voltage Setting

Output voltage can be adjusted by using the external divider resistors (R1, R2). By using the following equation, the output voltage ( $V_{OUT}$ ) can be determined. The voltage which is fixed inside the IC is described as  $V_{FB}$ .

$$V_{OUT} = V_{FB} \times ((R1 + R2) / R2)$$

Recommended Output Voltage Range:  $1.2 \text{ V} \leq V_{OUT} \leq 18 \text{ V}$

$$V_{FB} = V_{SET}$$

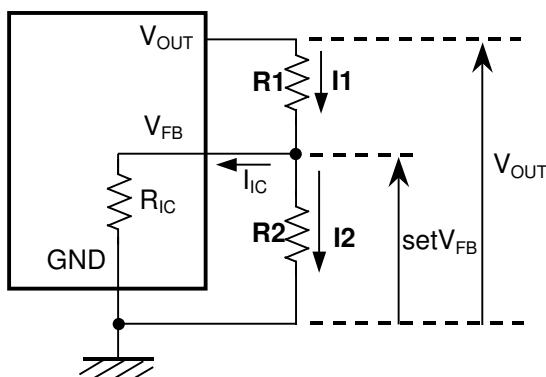


**Output Voltage Adjustment Using External Divider Resistors (R1, R2)**

The minimum resistance value for a resistor ( $R_{IC}$ ) is 1 MΩ ( $T_a = 25^\circ\text{C}$ , guaranteed by design). For better accuracy, setting  $R1 \ll R_{IC}$  reduces errors. The resistance value for a resistor (R2) should be set to 33 kΩ or lower. If the resistance values set for R1 and R2 are larger, the impedance of the  $V_{FB}$  pin becomes larger.

$R_{IC}$  could be affected by temperature; therefore, evaluate the circuit taking the actual conditions of use into account when deciding the resistance values for R1 and R2.


## TYPICAL APPLICATION FOR IC CHIP BREAKDOWN PREVENTION

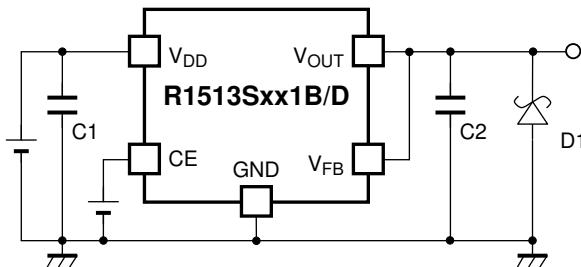


R1513S Typical Application for IC Chip Breakdown Prevention

When a sudden surge of electrical current travels along the  $V_{OUT}$  pin and GND due to a short-circuit, electrical resonance of a circuit involving an output capacitor ( $C_2$ ) and a short circuit inductor generates a negative voltage and may damage the device or the load devices. Connecting a schottky diode ( $D_1$ ) between the  $V_{OUT}$  pin and GND has the effect of preventing damage to them.


## PIN EQUIVALENT CIRCUIT DIAGRAMS



$V_{OUT}$  Pin Equivalent Circuit Diagrams



$CE$  Pin Equivalent Circuit Diagrams



$V_{FB}$  Pin Equivalent Circuit Diagrams

## PACKAGE INFORMATION

### POWER DISSIPATION (HSOP-6J)

The power dissipation of the package is dependent on PCB material, layout, and environmental conditions. The following conditions are used in this measurement.



#### Measurement Conditions

	Ultra-high Wattage Land Pattern	Standard Land Pattern
Environment	Mounting on Board (Wind Velocity = 0 m/s)	Mounting on Board (Wind Velocity = 0 m/s)
Board Material	Glass Cloth Epoxy Plastic (Four-layer Board)	Glass Cloth Epoxy Plastic (Double-sided Board)
Board Dimensions	76.2 mm × 114.3 mm × 0.8 mm	50 mm × 50 mm × 1.6 mm
Copper Ratio	96%	50%
Through-holes	φ 0.3 mm × 28 pcs	φ 0.5 mm × 24 pcs

#### Measurement Result

(Ta = 25°C, Tjmax = 150°C)


	Ultra-high Wattage Land Pattern	Standard Land Pattern	Free Air
Power Dissipation	3400 mW	2100 mW	675 mW
Thermal Resistance	37°C/W	59°C/W	185°C/W

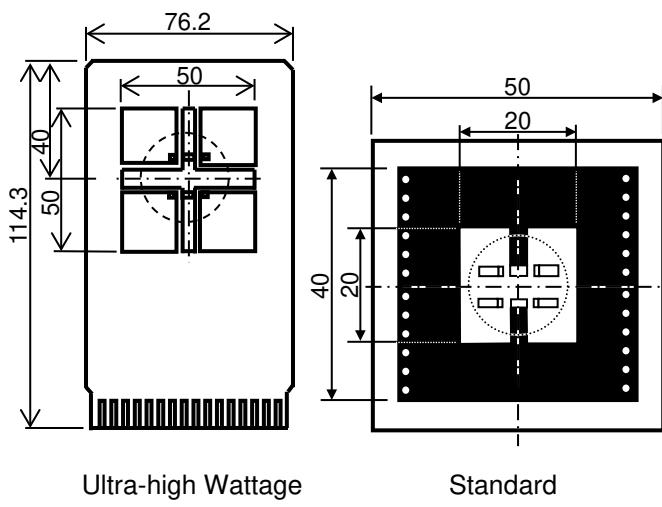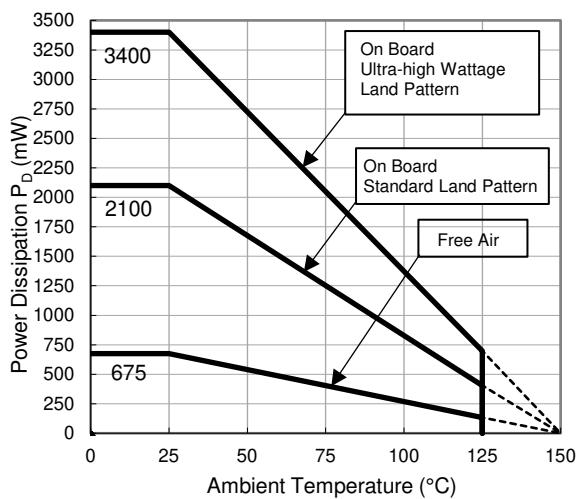

Power Dissipation vs. Ambient Temperature

Measurement Board Pattern

## PACKAGE DIMENSIONS (HSOP-6J)

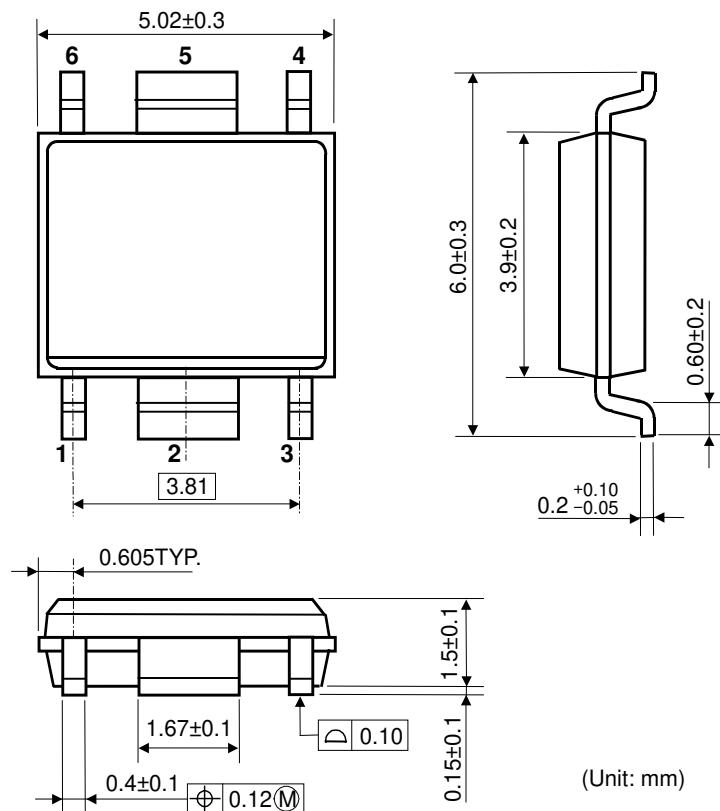


HSOP-6J Package Dimensions

## MARK SPECIFICATION (HSOP-6J)

①②③④: Product Code ... [Refer to MARK SPECIFICATION TABLE \(HSOP-6J\).](#)

⑤⑥: Lot Number ... Alphanumeric Serial Number



HSOP-6J Mark Specification

---

**R1513S**

---

NO.EC-321-190829

---

**MARK SPECIFICATION TABLE (HSOP-6J)****Mark Specification Table**


Product Name	①②③④
R1513S121B	Z 1 2 B
R1513S151B	Z 1 5 B
R1513S181B	Z 1 8 B
R1513S331B	Z 3 3 B
R1513S341B	Z 3 4 B
R1513S501B	Z 5 0 B
R1513S121D	Z 1 2 D
R1513S151D	Z 1 5 D
R1513S181D	Z 1 8 D
R1513S331D	Z 3 3 D
R1513S341D	Z 3 4 D
R1513S501D	Z 5 0 D

## TYPICAL CHARACTERISTICS


Note: Typical Characteristics are intended to be used as reference data; they are not guaranteed.

### 1) Output Voltage vs. Output Current ( $T_a = 25^\circ C$ )


R1513S121B/D

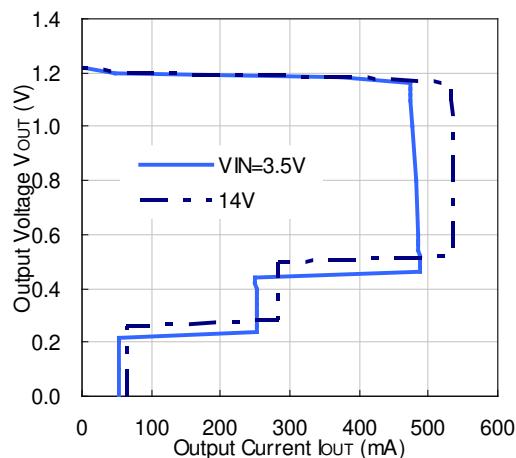

R1513S331B/D

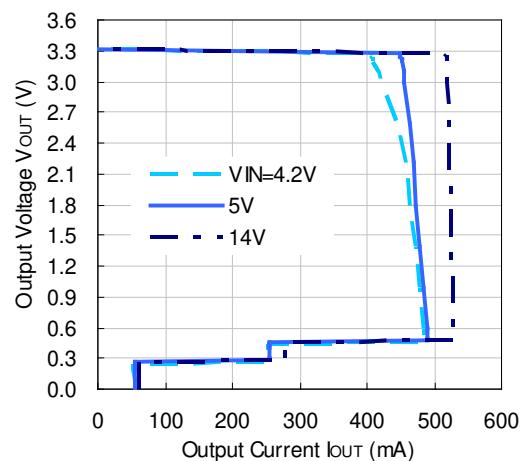


R1513S501B/D

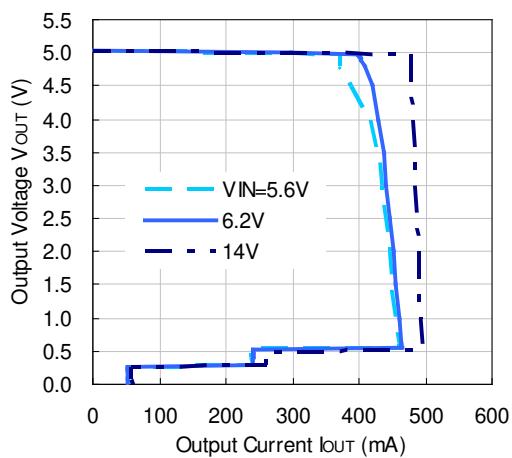


### 2) Output Voltage vs. Input Voltage ( $T_a = 25^\circ C$ )

R1513S121B/D

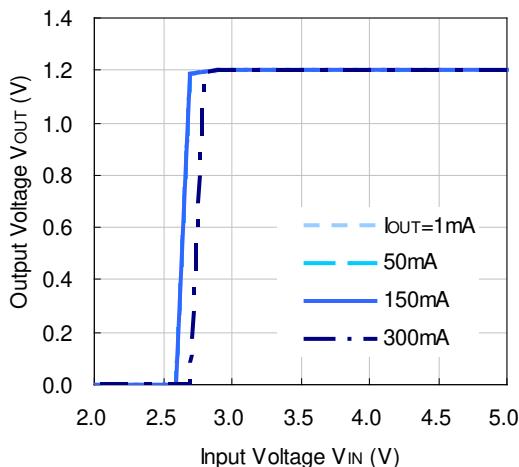


R1513S331B/D

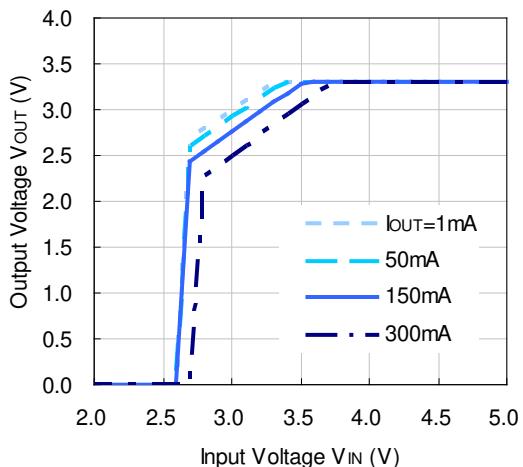

## R1513S


NO.EC-321-190829

**R1513S501B/D**

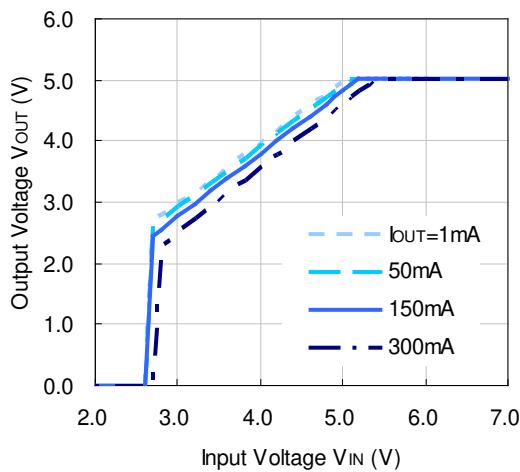


### 3) Supply Current vs. Input Voltage ( $T_a = 25^\circ\text{C}$ )


**R1513S121B/D**

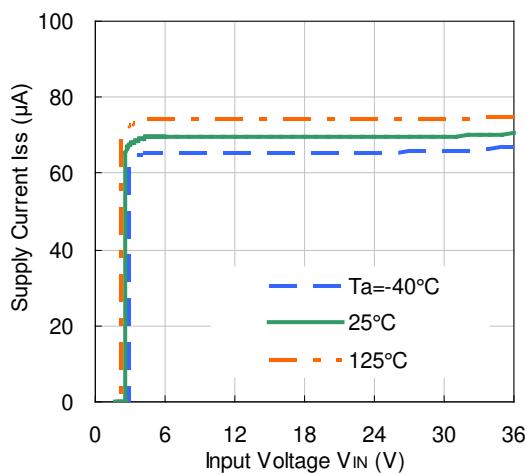


**R1513S331B/D**






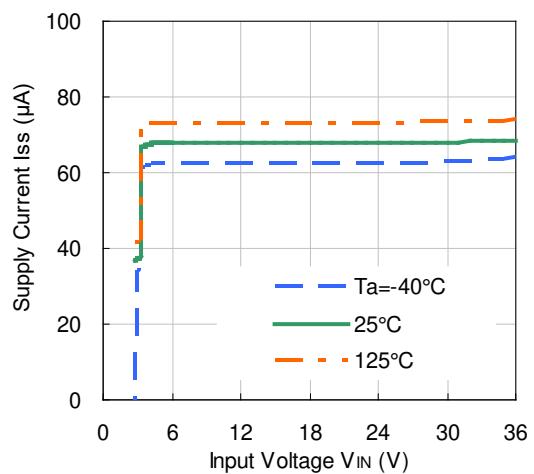


**R1513S501B/D**

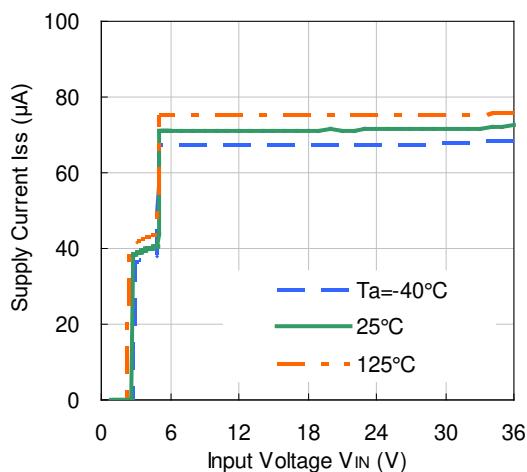

### 4) GND Pin Current vs. Output Current ( $T_a = 25^\circ\text{C}$ )

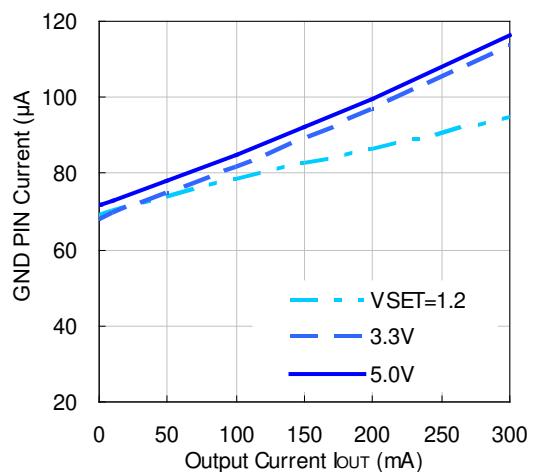


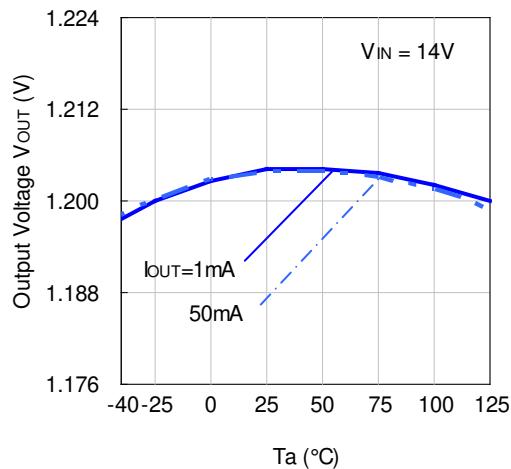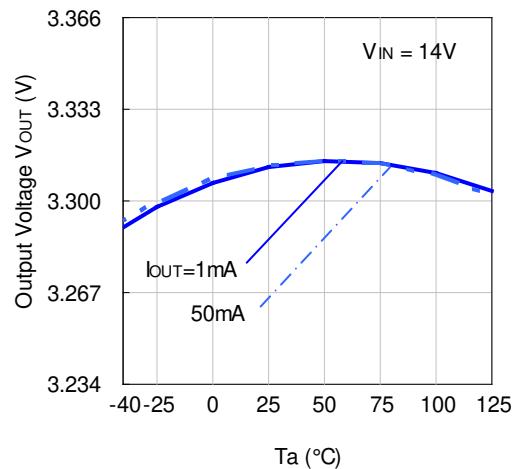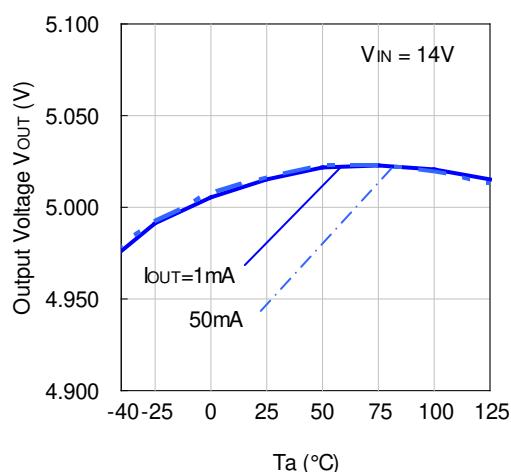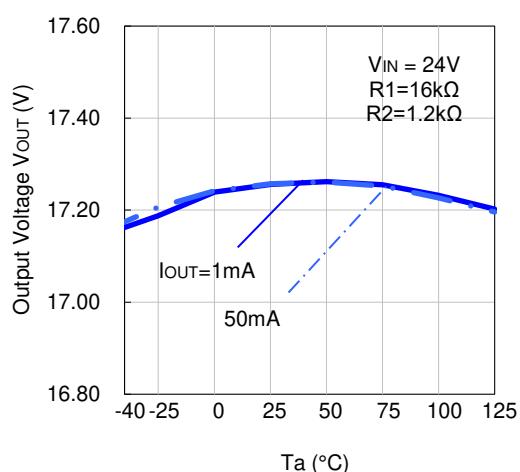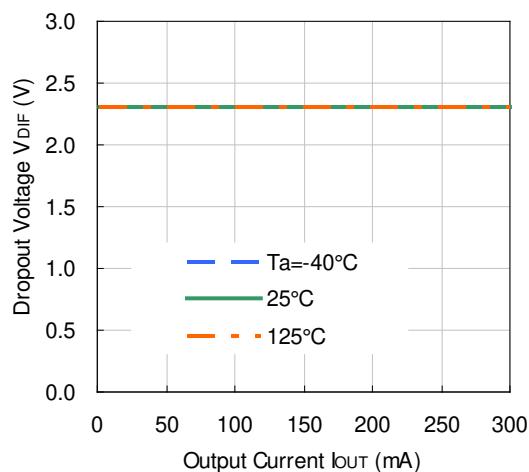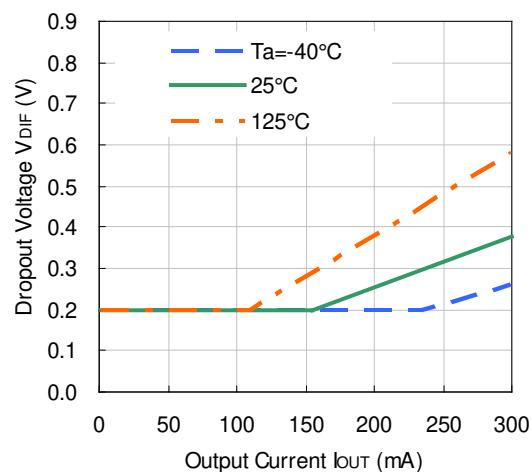**5) Output Voltage vs. Ambient Temperature****R1513S121B/D****R1513S331B/D****R1513S501B/D****R1513S121B/D  
(Output Voltage Adjusted to 17.2 V)****6) Dropout Voltage vs. Output Current****R1513S121B/D****R1513S331B/D**


## R1513S

NO.EC-321-190829

**R1513S501B/D**

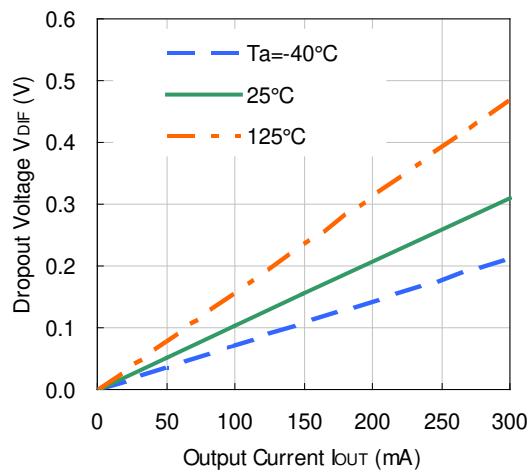


**7) Dropout Voltage vs. Output Voltage ( $T_a = 25^\circ\text{C}$ )**

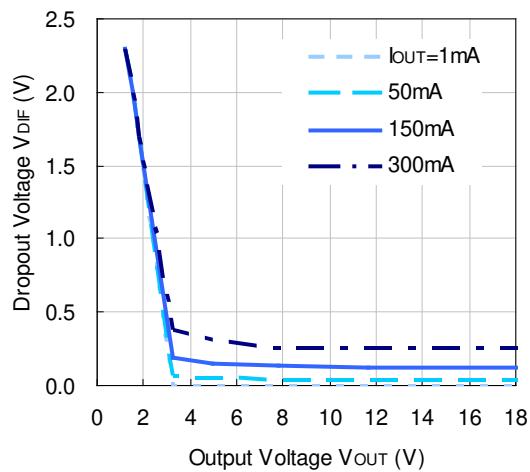


**8) Ripple Rejection vs. Input Voltage ( $T_a = 25^\circ\text{C}$ , Ripple = 0.5 Vpp)**


**R1513S121B/D ( $I_{OUT} = 1\text{ mA}$ )**

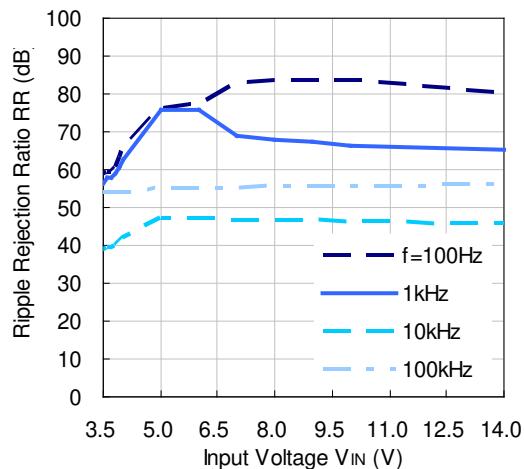


**R1513S121B/D ( $I_{OUT} = 50\text{ mA}$ )**





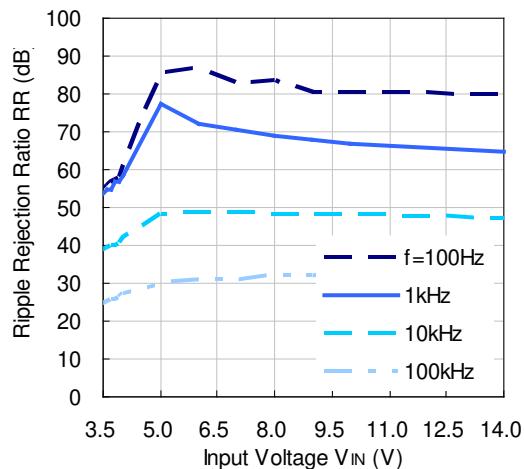


**R1513S331B/D ( $I_{OUT} = 1\text{ mA}$ )**

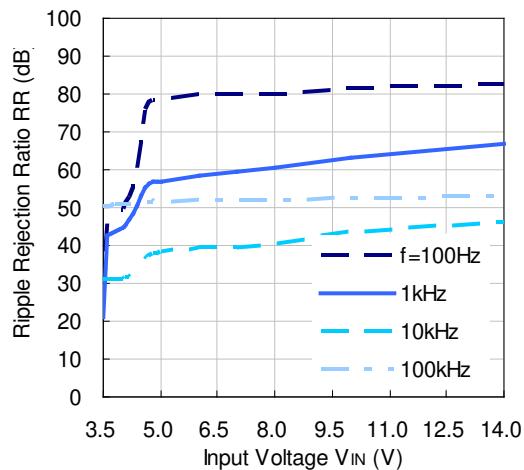

**R1513S331B/D ( $I_{OUT} = 50\text{ mA}$ )**

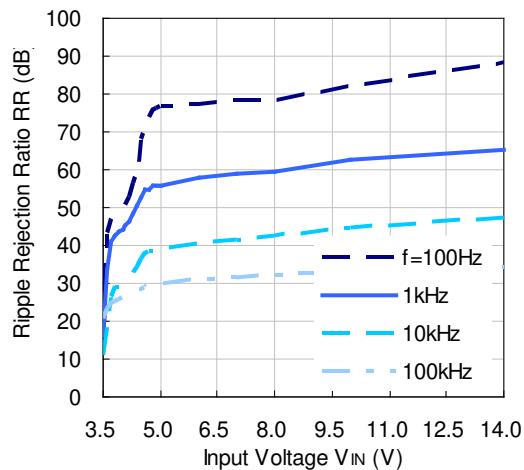

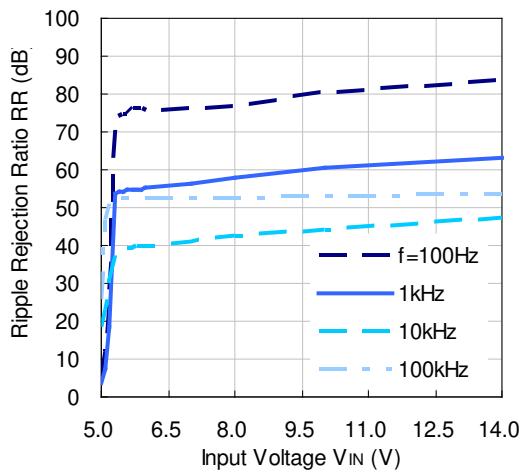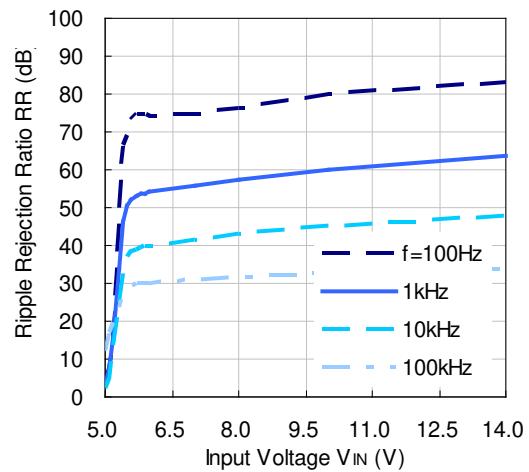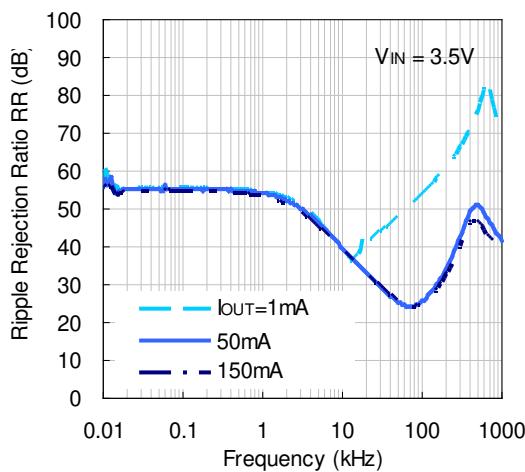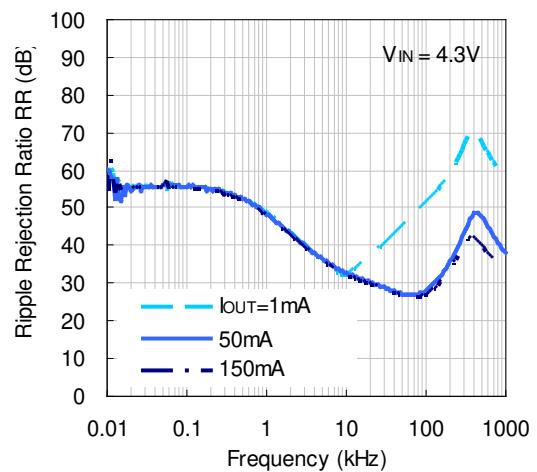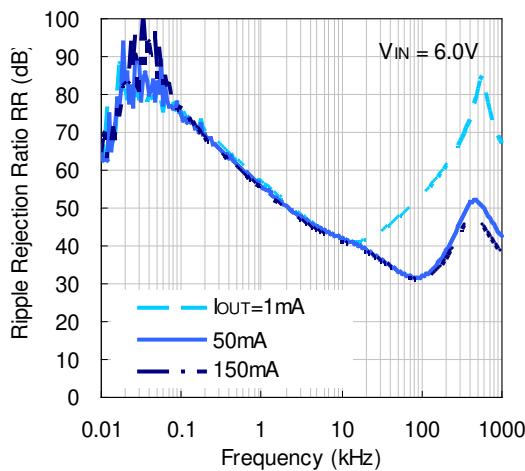
**R1513S501B/D ( $I_{OUT} = 1 \text{ mA}$ )****R1513S501B/D ( $I_{OUT} = 50 \text{ mA}$ )****9) Ripple Rejection vs. Frequency ( $T_a = 25^\circ\text{C}$ , Ripple = 0.5 Vpp)****R1513S121B/D****R1513S331B/D****R1513S501B/D**

## R1513S


NO.EC-321-190829

### 10) Input Transient Response ( $T_a = 25^\circ\text{C}$ , $C_2 = 4.7\mu\text{F}$ )


R1513S121B/D

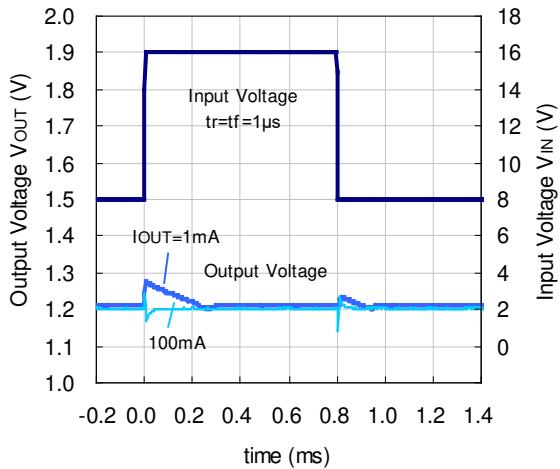

R1513S331B/D

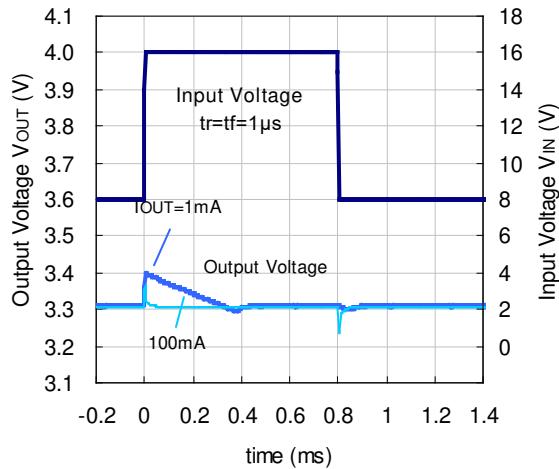


R1513S501B/D

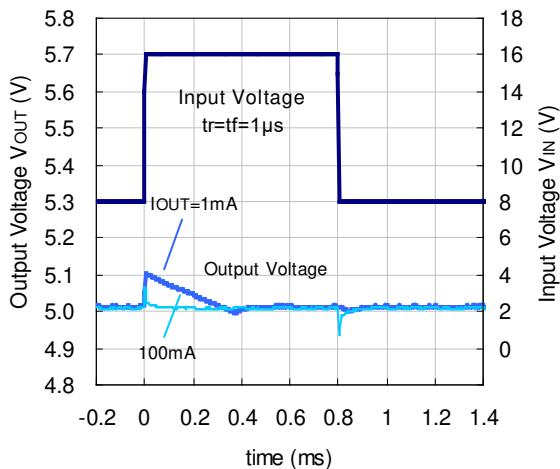


### 11) Cranking ( $T_a = -18^\circ\text{C}$ )






R1513S501B/D

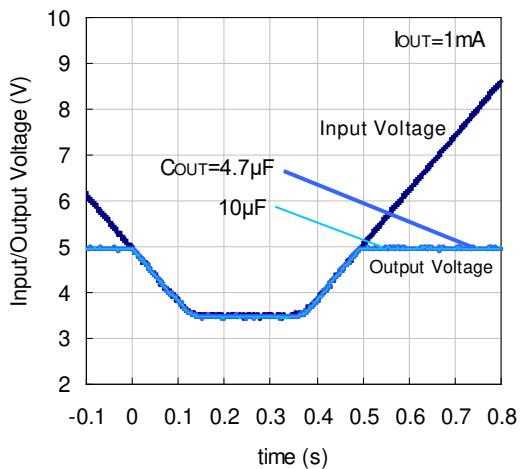

### 12) Load Dumping ( $T_a = 25^\circ\text{C}$ , $C_2 = 4.7 \mu\text{F}$ )

R1513S121B/D

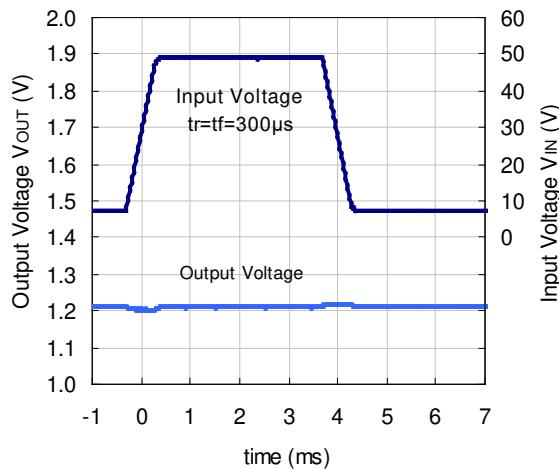

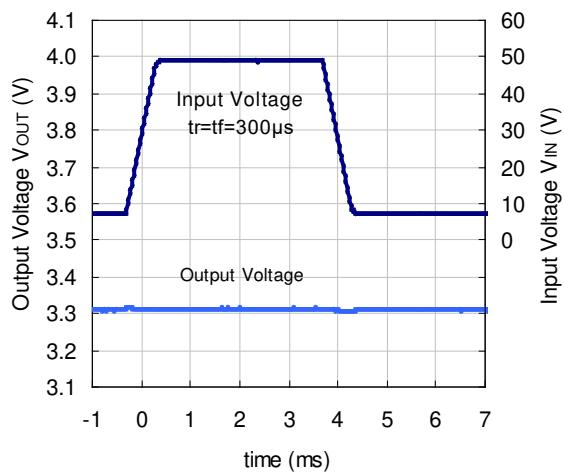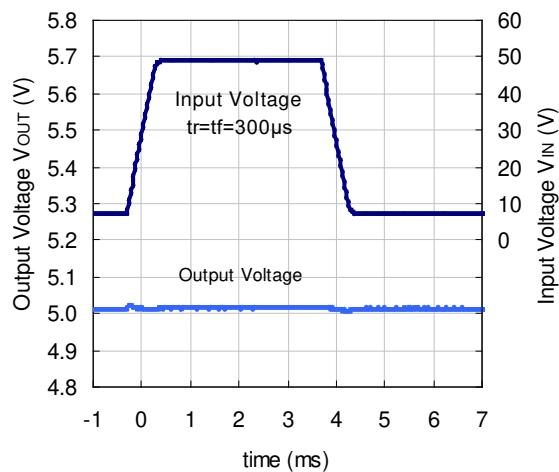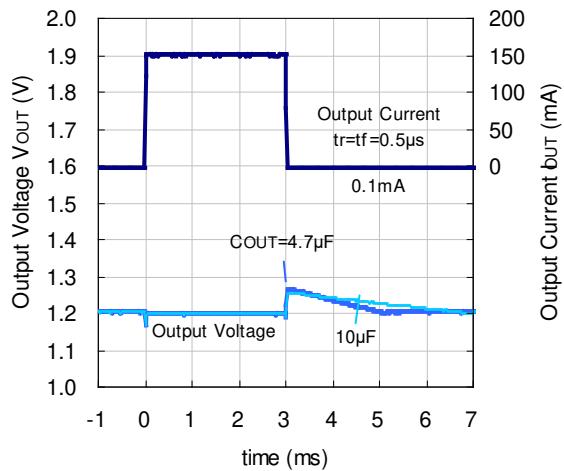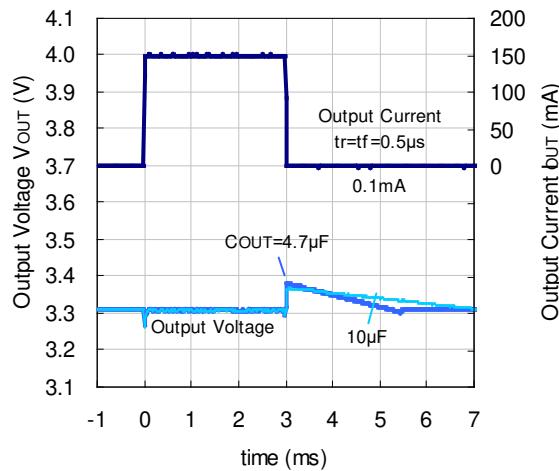
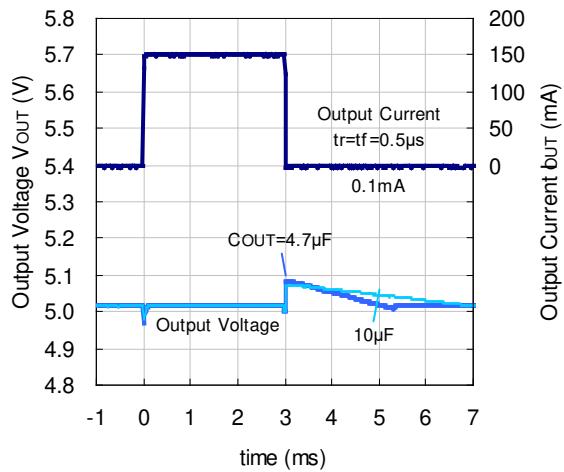
**R1513S331B/D****R1513S501B/D****13) Load Transient Response ( $T_a = 25^\circ C$ )****R1513S121B/D****R1513S331B/D****R1513S501B/D**

## R1513S



NO.EC-321-190829

### 14) CE Transient Response ( $T_a = 25^\circ\text{C}$ )



R1513S121B/D ( $V_{IN} = 3.5 \text{ V}$ )

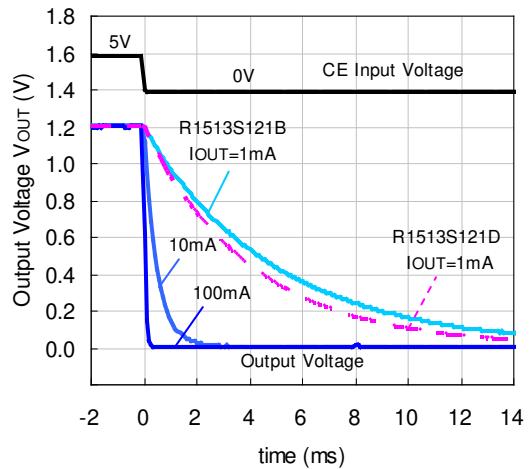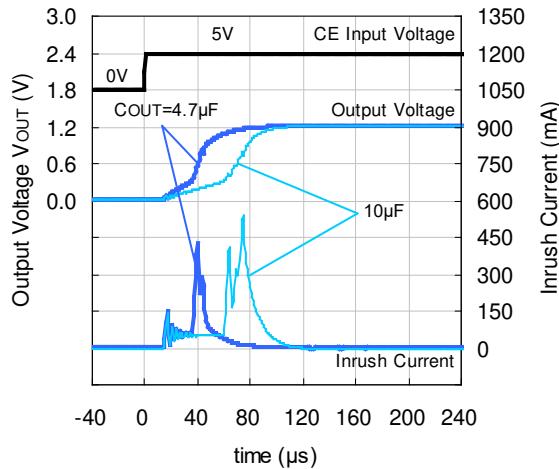

R1513S331B/D ( $V_{IN} = 4.3 \text{ V}$ )

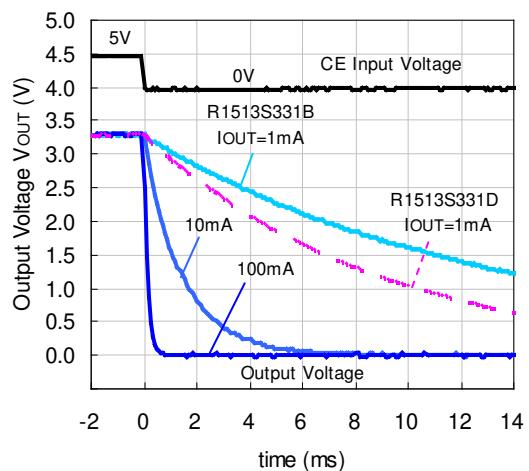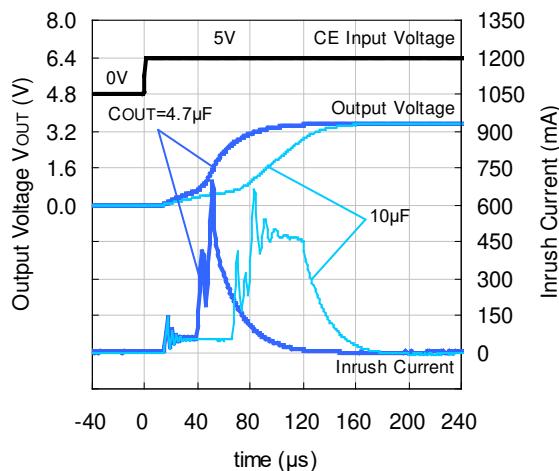


R1513S501B/D ( $V_{IN} = 6.0 \text{ V}$ )

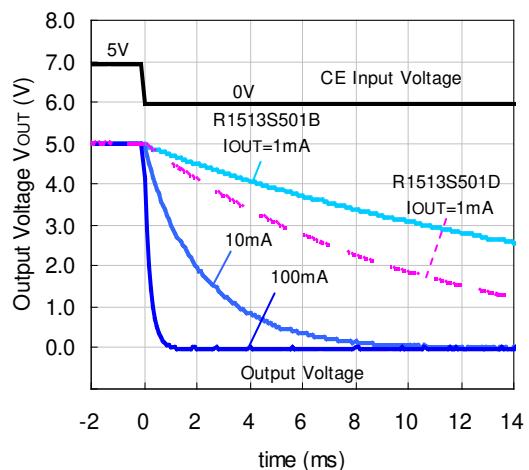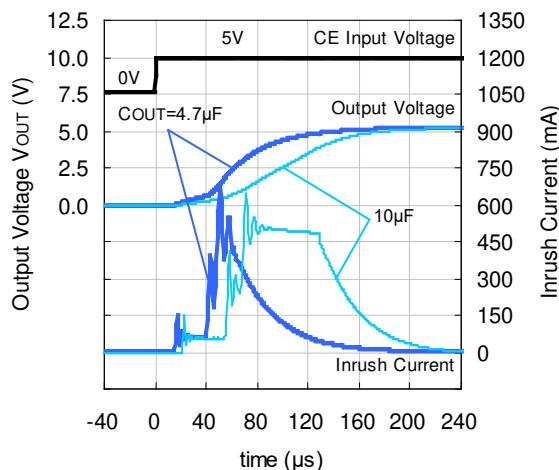


15) Power-on Transient Response ( $T_a = 25^\circ\text{C}$ ,  $V_{CE} = 5 \text{ V}$ )


R1513S121B/D

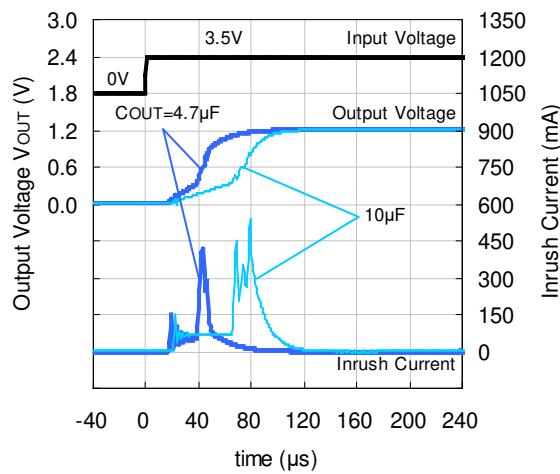

R1513S331B/D

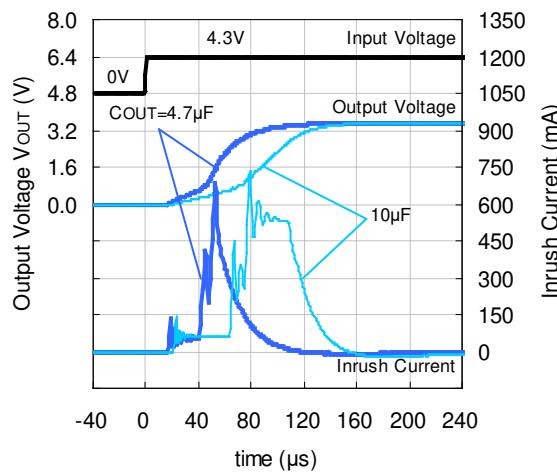


R1513S501B/D

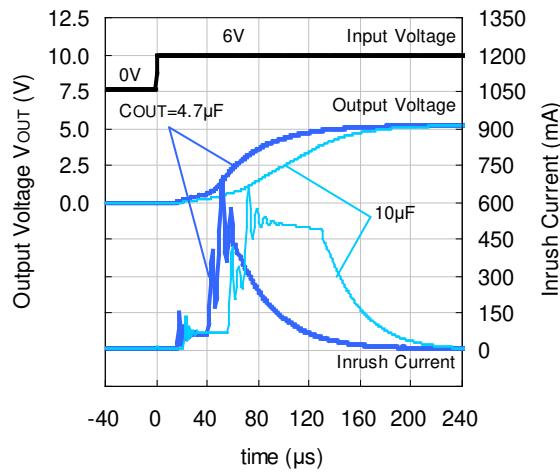


## 16) Thermal Shutdown

R1513S501B/D

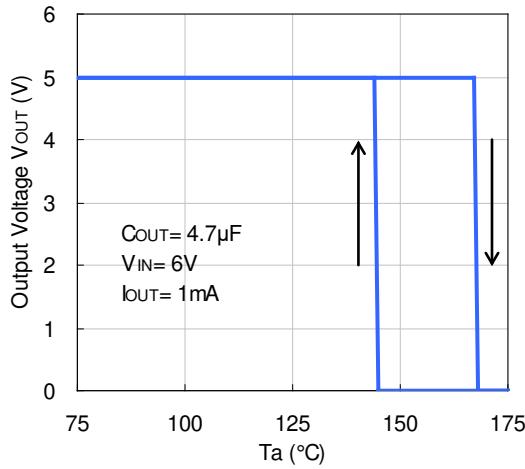17) CE Pin Current vs. CE Pin Voltage ( $T_a = 25^\circ\text{C}$ )

R1513Sxx1B/D


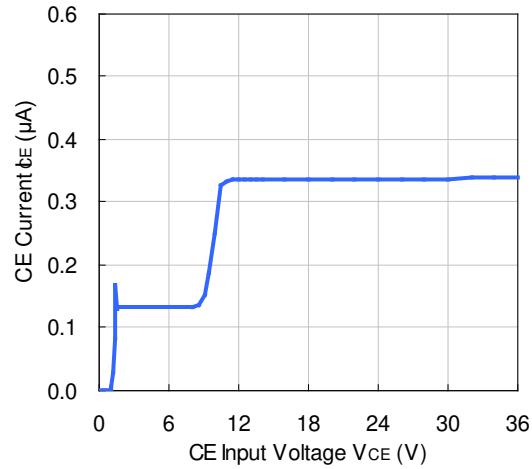


## R1513S

NO.EC-321-190829

### Equivalent Series Resistance (ESR) vs. Output Current

It is recommended that a ceramic type capacitor be used for this device. However, other types of capacitors having lower ESR can also be used. The relation between the output current ( $I_{OUT}$ ) and the ESR of output capacitor is shown below.

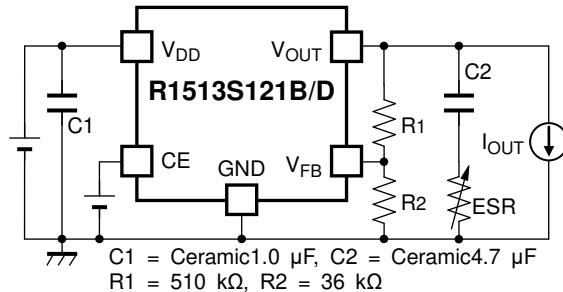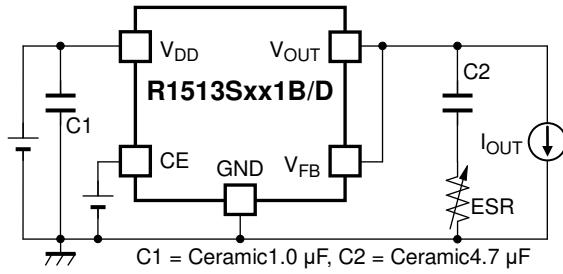

#### Measurement Conditions


Frequency Band: 10 Hz to 2 MHz

Ambient Temperature: -40°C to 125°C


Hatched Area: Noise level below 40  $\mu$ V (average)

Capacitor: C1 = 1.0  $\mu$ F Ceramic Capacitor, C2 = 4.7  $\mu$ F Ceramic Capacitor (CGA4J3X7R1C475K125AB)


**R1513S121B/D**

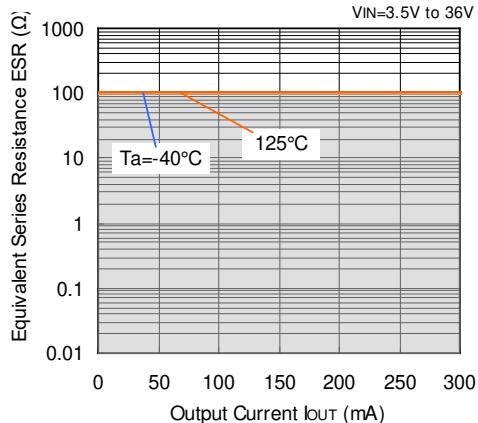


**R1513S331B/D**

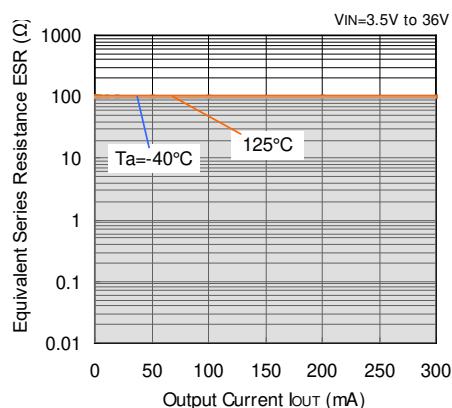

**R1513S501B/D**

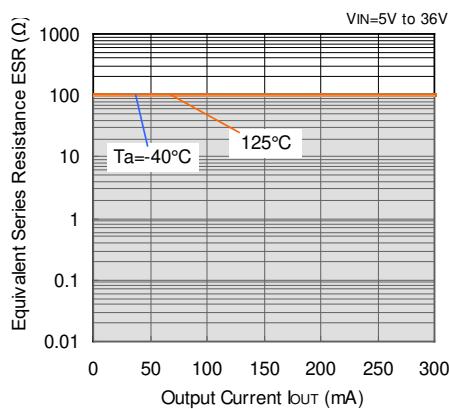

**R1513S121B/D ( $V_{OUT}$  to 18.2 V)**

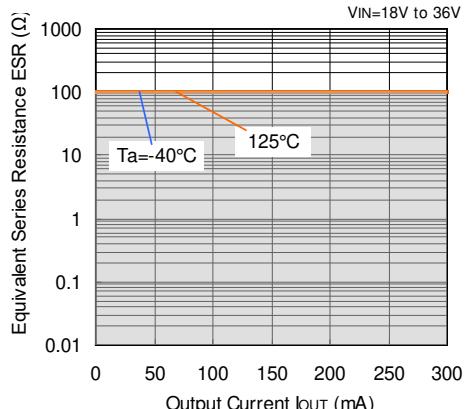



1. The products and the product specifications described in this document are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to our sales representatives for the latest information thereon.
2. The materials in this document may not be copied or otherwise reproduced in whole or in part without prior written consent of our company.
3. Please be sure to take any necessary formalities under relevant laws or regulations before exporting or otherwise taking out of your country the products or the technical information described herein.
4. The technical information described in this document shows typical characteristics of and example application circuits for the products. The release of such information is not to be construed as a warranty of or a grant of license under our company's or any third party's intellectual property rights or any other rights.
5. The products in this document are designed for automotive applications. However, when using the products for automotive applications, please make sure to contact our sales representative in advance due to confirming the quality level.
6. We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order to prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, fire containment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
7. Anti-radiation design is not implemented in the products described in this document.
8. The X-ray exposure can influence functions and characteristics of the products. Confirm the product functions and characteristics in the evaluation stage.
9. WLCSP products should be used in light shielded environments. The light exposure can influence functions and characteristics of the products under operation or storage.
10. There can be variation in the marking when different AOI (Automated Optical Inspection) equipment is used. In the case of recognizing the marking characteristic with AOI, please contact our sales or our distributor before attempting to use AOI.
11. Please contact our sales representatives should you have any questions or comments concerning the products or the technical information.



#### Nisshinbo Micro Devices Inc.

##### Official website

<https://www.nisshinbo-microdevices.co.jp/en/>

##### Purchase information

<https://www.nisshinbo-microdevices.co.jp/en/buy/>