
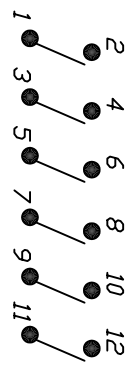
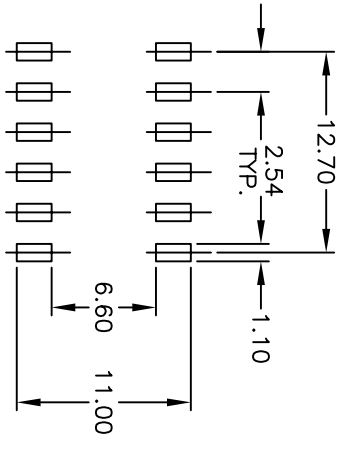
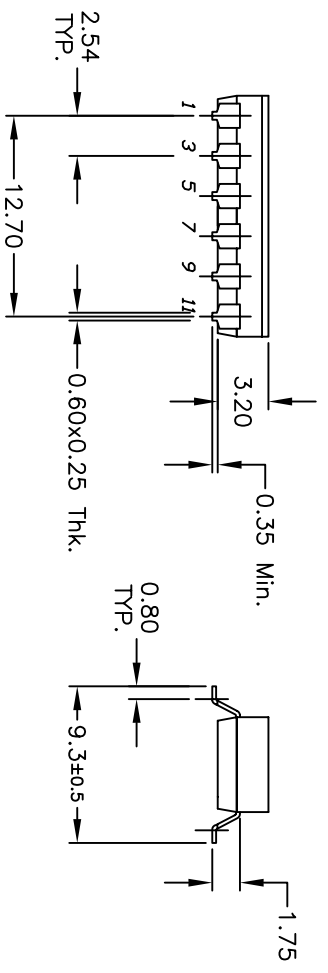


E-LOGD HERE
SEE EXPLODED VIEW



NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATINGS: 25mA @24VDC. (Switch)
100mA @50VDC. (Carry)
5. CONTACT MATERIAL:
CONTACTS: (MOVABLE) Copper w/Gold Plate
TERMINALS: BRASS w/Gold Plate
6. INSULATION RESISTANCE:
100 Mega-OHMS min. @500VDC
7. CONTACT RESISTANCE:
50 MILLI-OHMS typical @2-4VDC @100mA
OPERATING TEMP.:
8. -40°C to +80°C
9. PACKAGE: IN DISPENSING TUBES (33 PER TUBE)
WITH ALL POLES IN THE "OFF" POSITION.

RECOMMENDED P.C.B. LAYOUT



B	15964	UPDATE NOTE 9 AND TITLE	4/17/06	CT
A	12540	RELEASED FOR PRODUCTION	7/1/02	CJB
REV.	ECN NO.	DESCRIPTION	DATE	CHKD

SCALE	2:1	DATE	7/1/02	DR	CJB	DWG	W825226	REV	B
TITLE	KAJ06 SG GT								

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED