

#### 3BWX-X


- ♦ Industry Standard 3mm (T1) Package
- **♦** RoHS Compliant
- Water Clear (C), Diffused (D), and Tinted (T) Lenses
- Available in Flange (F) and Shouldered (S) Lead Frame Styles
- Ideal for Status Indication and Display



Bivar 3mm T1 Package LED may be used in almost any application. Bivar offers water clear LED lens for maximum light output, diffused LED lens for uniform light output, and tinted lens to identify the color of the LED. The Flanged LED is ideal for Panel Mount Clip & Ring assemblies. The Shouldered Lead frame LED is ideal for vertical spacer assemblies without lead bends and also has a built in strain relief feature which is ideal for right angle holder assemblies that require lead bends.

| Part Number | Material            | Emitted Color | Peak. Wavelength λp(nm) TYP. | Lens Appearance | Viewing Angle |  |
|-------------|---------------------|---------------|------------------------------|-----------------|---------------|--|
| 3BWC-F      | D-F T-F GaN/SiC D-S | BLUE          |                              | Water Clear     | 20°           |  |
| 3BWD-F      |                     |               | 430nm                        | Blue Diffused   | 35°           |  |
| 3BWT-F      |                     |               |                              | Blue Tinted     | 20°           |  |
| 3BWC-S      |                     |               |                              | Water Clear     | 30°           |  |
| 3BWD-S      |                     |               |                              | Blue Diffused   | 40°           |  |
| 3BWT-S      |                     |               |                              | Blue Tinted     | 30°           |  |

### **Part Number Designation**













#### **Outline Dimensions**

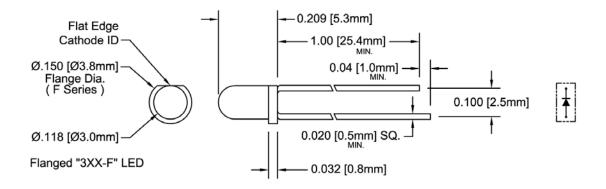

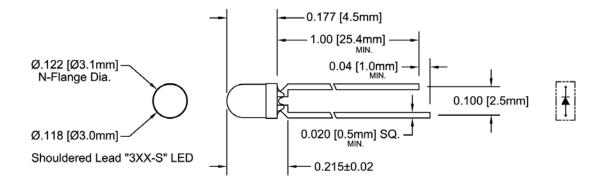

Recommended Mounting Hole Size =  $\emptyset.032^{+.003}_{-.002}$ 

#### **Outline Drawings Notes:**

- All dimensions are in inches [millimeters].
- 2. Standard tolerance: ±0.010" unless otherwise noted.
- 3. Tolerance of overall epoxy outline:  $\pm 0.020$ " unless otherwise noted.
- 4. Epoxy meniscus may extend to 0.060" max.



#### **Absolute Maximum Ratings**

 $T_A = 25^{\circ}C$  unless otherwise noted

| Power Dissipation   | 150 mW       |  |
|---|--------------|--|
| Forward Current ( DC )  | 25 mA        |  |
| Peak Forward Current <sup>1</sup>                                     | 70 mA        |  |
| Reverse Voltage   | 5 V          |  |
| Operating Temperature Range   | -25 ~ +85°C  |  |
| Storage Temperature Range   | -30 ~ +100°C |  |
| Lead Soldering Temperature ( 3 mm from the base of the epoxy bulb ) 2 | 260°C        |  |

### **Electrical / Optical Characteristics**

 $T_A = 25^{\circ}C \& I_F = 20 \text{ mA}$  unless otherwise noted

| Part Number | Forward<br>Voltage (V) <sup>1</sup> |     | Recommend<br>Forward<br>Current (mA) |     | Reverse<br>Current<br>(µA) | Dominant<br>Wavelength (nm) <sup>2</sup> |     |     | Luminous<br>Intensity Iv (mcd) |     |     | Viewing<br>Angle<br>2 Θ ½<br>(deg) |     |     |
|-------------|-------------------------------------|-----|--------------------------------------|-----|----------------------------|--|-----|-----|--------------------------------|-----|-----|------------------------------------|-----|-----|
|             | MIN                                 | TYP | MAX                                  | MIN | TYP                        | MAX                                      | MAX | MIN | TYP                            | MAX | MIN | TYP                                | MAX | TYP |
| 3BWC-F      |                                     |     |                                      |     |                            |  |     | /   | 1                              | /   | 10  | 15                                 | 30  | 20  |
| 3BWD-F      | /                                   | 4.0 | 4.5                                  | /   | 20                         | /  | 100 | /   | 1                              | /   | 5   | 10                                 | 20  | 35  |
| 3BWT-F      |                                     |     |                                      |     |                            |  |     | /   | 1                              | /   | 10  | 15                                 | 30  | 20  |
| 3BWC-S      |                                     |     |                                      |     |                            |  |     | /   | 1                              | /   | 15  | 25                                 | 50  | 30  |
| 3BWD-S      | /                                   | 4.0 | 4.5                                  | /   | 20                         | /  | 100 | /   | /                              | /   | 5   | 10                                 | 20  | 40  |
| 3BWT-S      |                                     |     |                                      |     |                            |  |     | /   | 1                              | /   | 15  | 25                                 | 50  | 30  |

Notes: 1. Tolerance of forward voltage: ±0.05V.

2. Tolerance of dominant wavelength: ±1.0nm.

Notes: 1. 10% Duty Cycle, Pulse Width ≤ 0.1 msec. 2. Solder time less than 5 seconds at temperature extreme.



### **Typical Electrical / Optical Characteristics**

 $T_A = 25$ °C unless otherwise noted

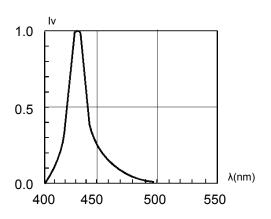


Fig. 1 Relative Luminous Intensity vs. Wavelength @ 20mA

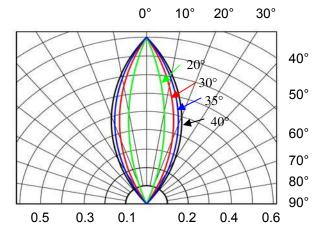


Fig. 2 Directivity Radiation Diagram

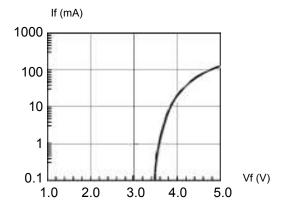


Fig. 3 Forward Current vs. Forward Voltage

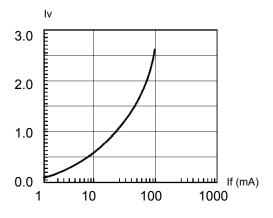


Fig. 4 Relative Luminous Intensity vs. Forward Current Normalize @ 20 mA

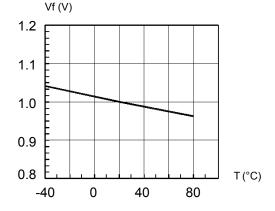


Fig. 5 Forward Voltage vs. Temperature


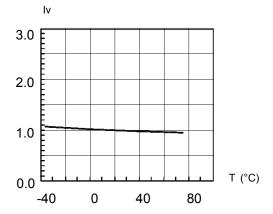


Fig. 6 Relative Luminous Intensity vs. Temperature




#### **Recommended Soldering Conditions**

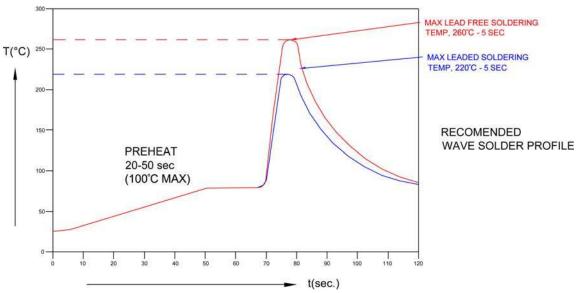

| Recommended Lead Free Wave Soldering Profile   |   |  |  |  |  |
|--|---|--|--|--|--|
| Preheat Temperature: 100°C Max.  | Peak Temperature: 260°C Max.            |  |  |  |  |
| Preheat Time: 20 ~ 50 Seconds  | Solder Time Above 217°C: 5 Seconds Max. |  |  |  |  |
| Note: Turn off top heater at preheat to prevent the lamp body directly exposed to the heat source. |   |  |  |  |  |

#### **Packaging and Labeling Plan**

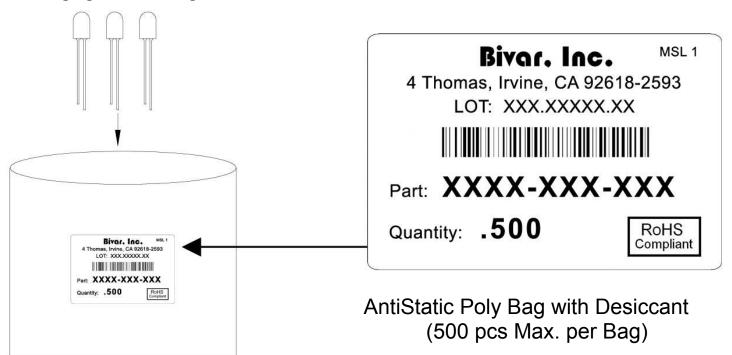

Bivar reserves the right to make changes at any time without notice