



CRYSTEK
MICROWAVE
 A DIVISION OF CRYSTEK CORPORATION

**26.5 GHZ HAND FORMABLE
 .086 COAX CABLES**



50 Ohm DC-26.5 GHz Hand Formable Coaxial Cables


Features:

- Center Conductor:** Silver-plated copper wire
- Outer Braid:** Tin-soaked copper braid, 100% coverage
- Insulation:** PTFE (Polytetrafluoroethylene) dielectric
- Cable Outer Diameter:** 0.086" (2.2mm)
- Connectors:** Stainless Steel
- Center Pin:** Gold-plated brass
- Operating Temperature:** -40°C to +85°C
- Minimum Bend Radius:** 0.240" (6.0mm) single bend
0.99" (25mm) multiple bends

Electrically Matched Pairs Available

PN: CCSMA26.5-MM-086-12

INSERTION LOSS

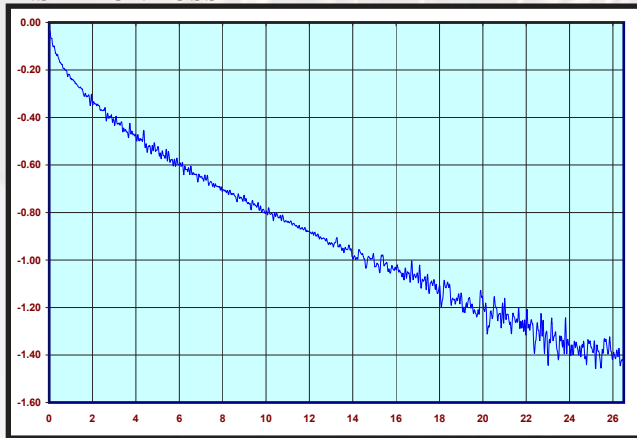

Electrical Specifications:

- Impedance:** 50 Ohms
 - Frequency:** DC to 26.5 GHz
 - Insertion Loss:** 1.40 dB/ft at 26.5 GHz
 - VSWR:** <1.3, DC to 26.5 GHz
 - Nominal Capacitance:** 29 pF/ft
 - Velocity of Propagation:** 70%
 - Shield Effectiveness:** Greater than 100 dB
 - Attenuation (dB/ft):** 0.16 Typical at 0.5 GHz
0.22 Typical at 1 GHz
0.80 Typical at 10 GHz
1.13 Typical at 18 GHz
1.40 Typical at 26.5 GHz
- *connector loss not included (refer to actual cable plot below)*

- Avg Power in (Watts):** 900 @ 100 MHz
200 @ 1 GHz
50 @ 10 GHz
- *as specified at 20°C*

- Applications:** Jumpers
Instrumentation
High Frequency Interconnects



SMA / SMA [Straight/Straight]

Part Number	Description	Length
CCSMA26.5-MM-086-3	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	3"
CCSMA26.5-MM-086-4	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	4"
CCSMA26.5-MM-086-5	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	5"
CCSMA26.5-MM-086-6	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	6"
CCSMA26.5-MM-086-7	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	7"
CCSMA26.5-MM-086-8	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	8"
CCSMA26.5-MM-086-10	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	10"
CCSMA26.5-MM-086-12	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	12"



12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913
 PHONE: 239-561-3311 • 800-237-3061 Rev.: C
 FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 10-10-22



CRYSTEK MICROWAVE


A DIVISION OF CRYSTEK CORPORATION

26.5 GHZ HAND FORMABLE .086 COAX CABLES




Data plots contained within this specification are generated from actual production cable assemblies. This data represents the typical performance that can be expected from each cable assembly. The data is plotted from raw data without modification (ie: Smoothing or Averaging.)


PN: CCSMA26.5-MM-086-3
VSWR (S11)

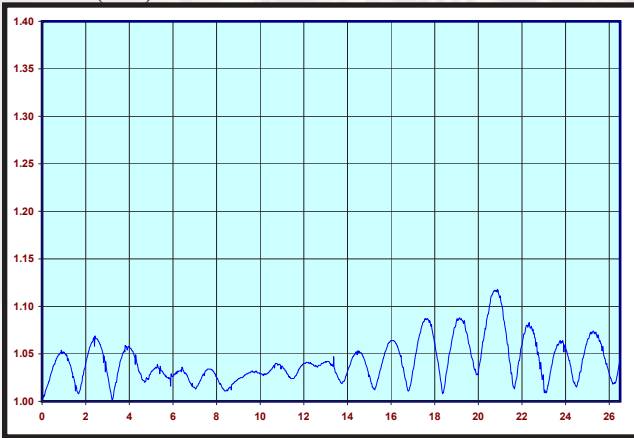


PN: CCSMA26.5-MM-086-3
INSERTION LOSS (S12)

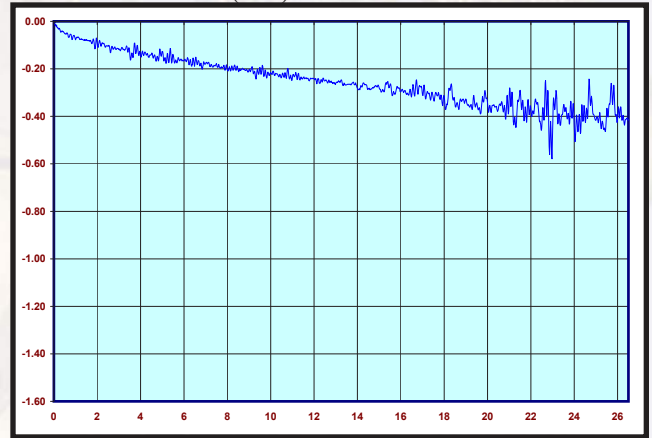

PN: CCSMA26.5-MM-086-3
INSERTION LOSS (S21)

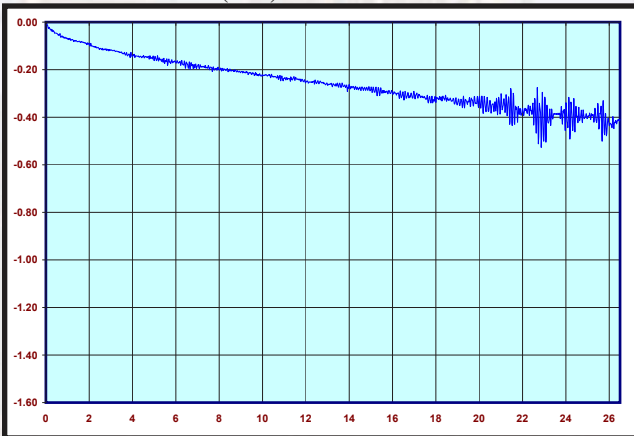

PN: CCSMA26.5-MM-086-3
VSWR (S22)

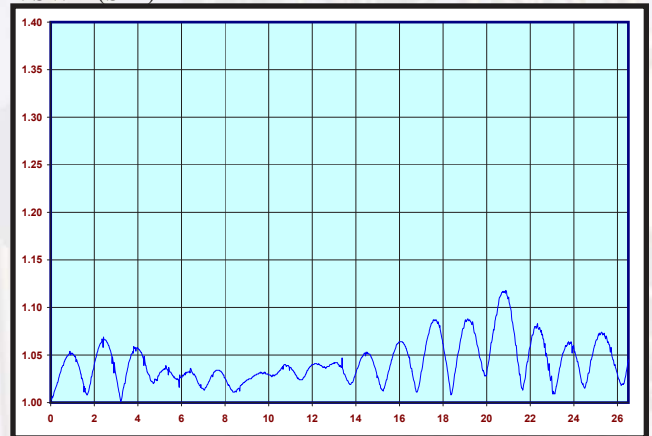

CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913
PHONE: 239-561-3311 • 800-237-3061 Rev.: C
FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 10-10-22




CRYSTEK
MICROWAVE
 A DIVISION OF CRYSTEK CORPORATION

**26.5 GHZ HAND FORMABLE
 .086 COAX CABLES**




Data plots contained within this specification are generated from actual production cable assemblies. This data represents the typical performance that can be expected from each cable assembly. The data is plotted from raw data without modification (ie: Smoothing or Averaging.)


PN: CCSMA26.5-MM-086-4
 VSWR (S11)

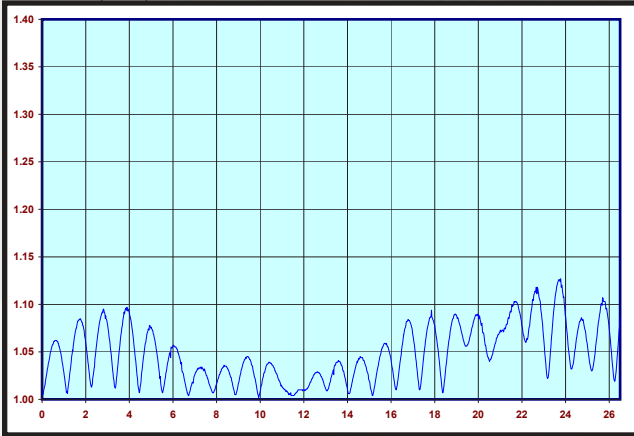


PN: CCSMA26.5-MM-086-4
 INSERTION LOSS (S12)

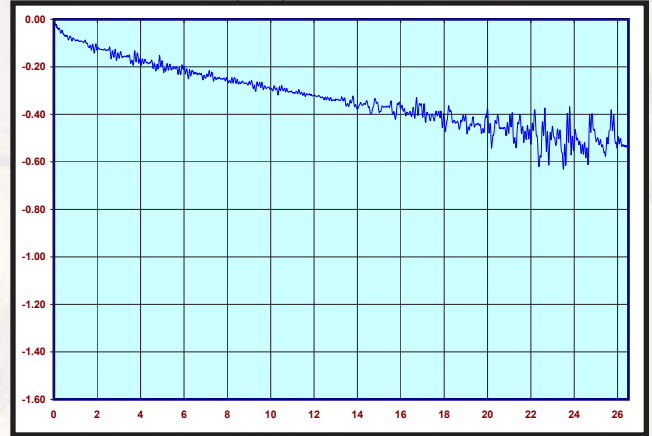

PN: CCSMA26.5-MM-086-4
 INSERTION LOSS (S21)

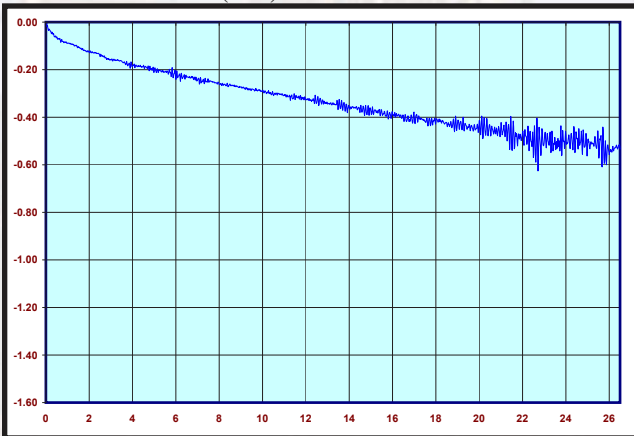

PN: CCSMA26.5-MM-086-4
 VSWR (S22)

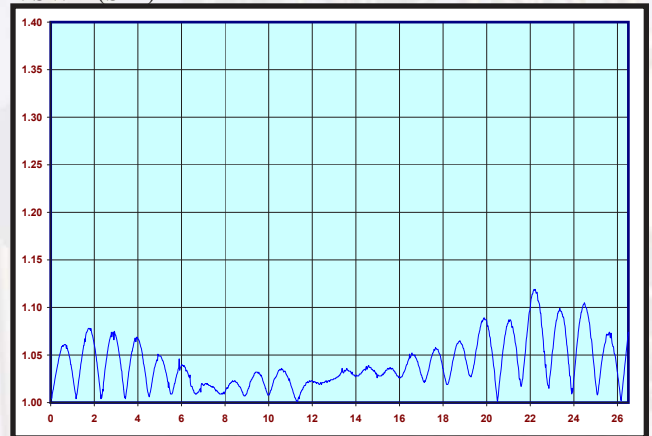




CRYSTEK
MICROWAVE
 A DIVISION OF CRYSTEK CORPORATION

**26.5 GHZ HAND FORMABLE
 .086 COAX CABLES**




Data plots contained within this specification are generated from actual production cable assemblies. This data represents the typical performance that can be expected from each cable assembly. The data is plotted from raw data without modification (ie: Smoothing or Averaging.)


PN: CCSMA26.5-MM-086-5
 VSWR (S11)

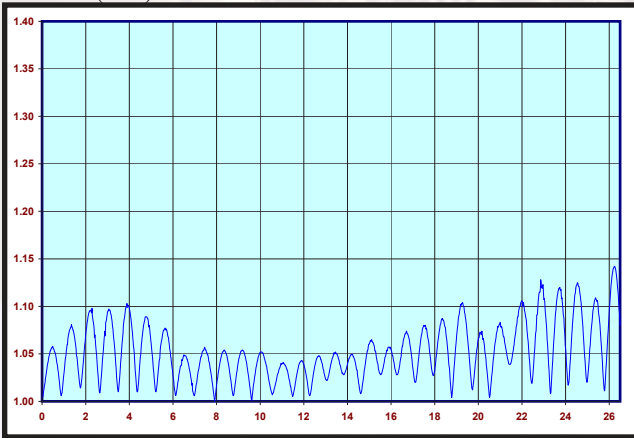


PN: CCSMA26.5-MM-086-5
 INSERTION LOSS (S12)

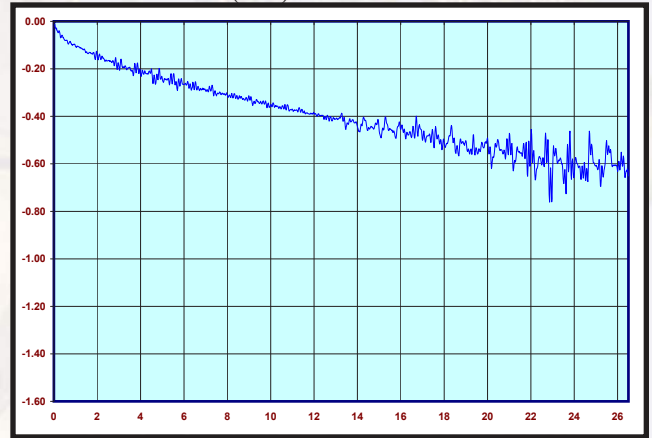

PN: CCSMA26.5-MM-086-5
 INSERTION LOSS (S21)

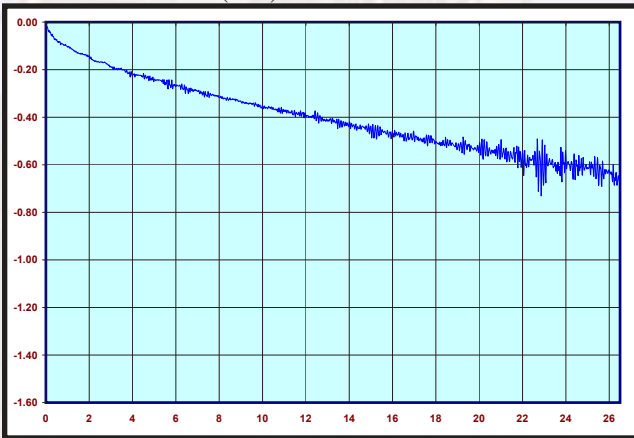

PN: CCSMA26.5-MM-086-5
 VSWR (S22)

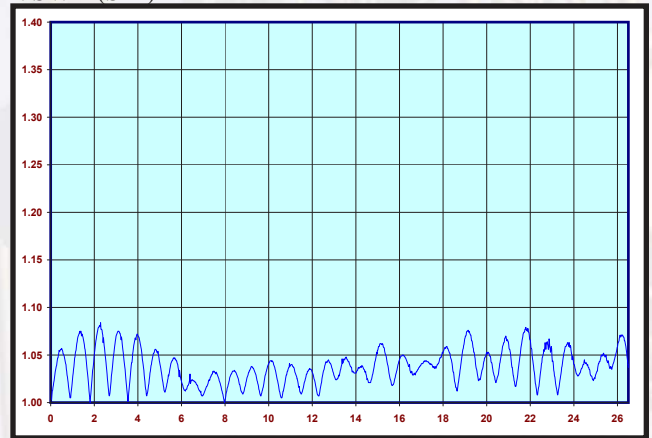



CRYSTEK MICROWAVE


A DIVISION OF CRYSTEK CORPORATION

26.5 GHZ HAND FORMABLE .086 COAX CABLES




Data plots contained within this specification are generated from actual production cable assemblies. This data represents the typical performance that can be expected from each cable assembly. The data is plotted from raw data without modification (ie: Smoothing or Averaging.)


PN: CCSMA26.5-MM-086-6
VSWR (S11)

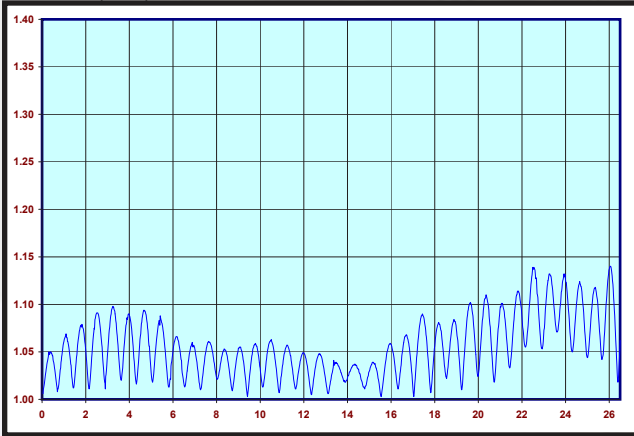


PN: CCSMA26.5-MM-086-6
INSERTION LOSS (S12)

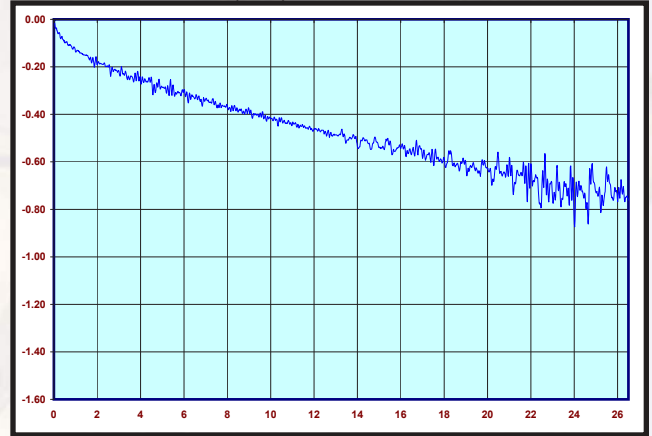

PN: CCSMA26.5-MM-086-6
INSERTION LOSS (S21)

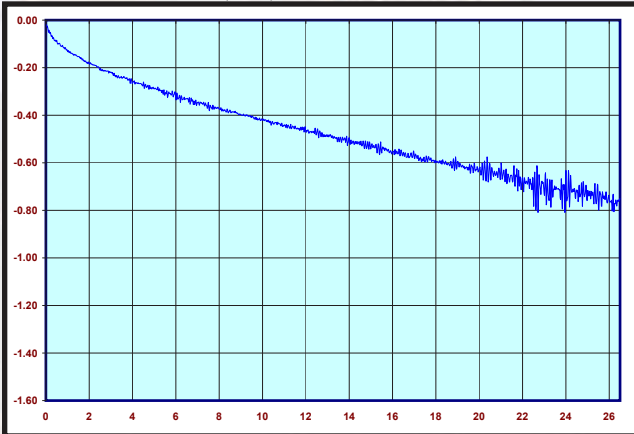

PN: CCSMA26.5-MM-086-6
VSWR (S22)

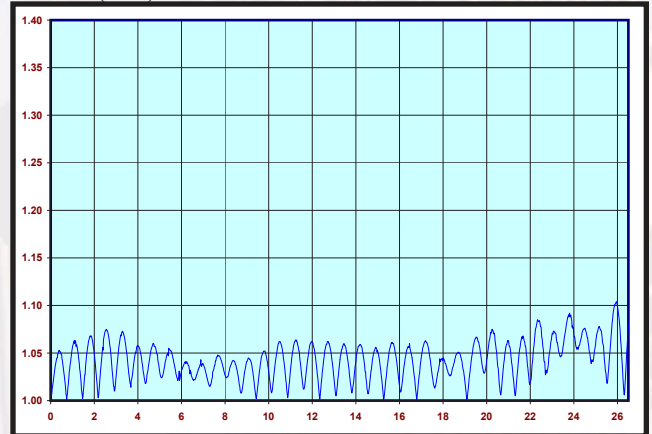

CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913
PHONE: 239-561-3311 • 800-237-3061 Rev.: C
FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 10-10-22



CRYSTEK MICROWAVE


A DIVISION OF CRYSTEK CORPORATION

26.5 GHZ HAND FORMABLE .086 COAX CABLES




Data plots contained within this specification are generated from actual production cable assemblies. This data represents the typical performance that can be expected from each cable assembly. The data is plotted from raw data without modification (ie: Smoothing or Averaging.)


PN: CCSMA26.5-MM-086-7
VSWR (S11)

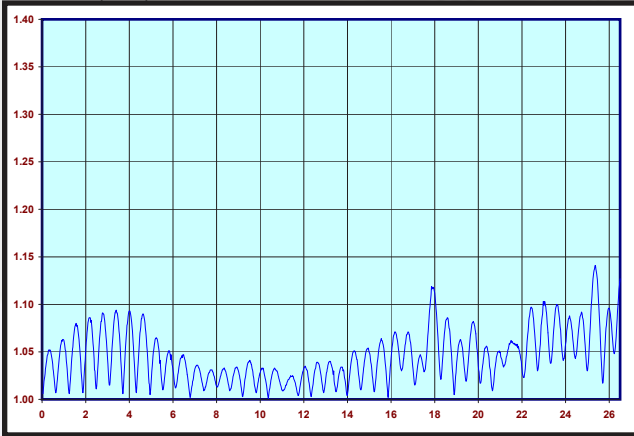


PN: CCSMA26.5-MM-086-7
INSERTION LOSS (S12)

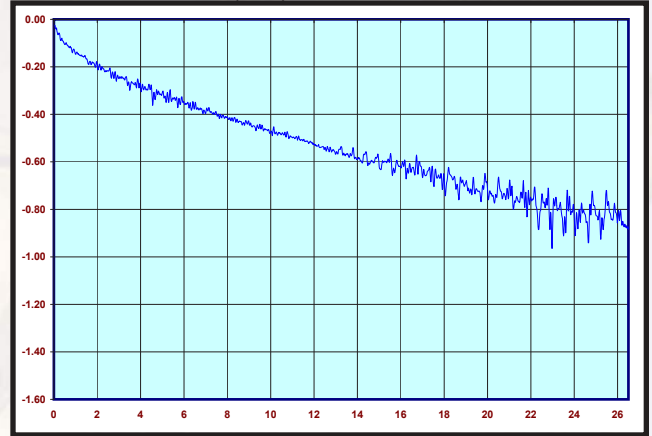

PN: CCSMA26.5-MM-086-7
INSERTION LOSS (S21)

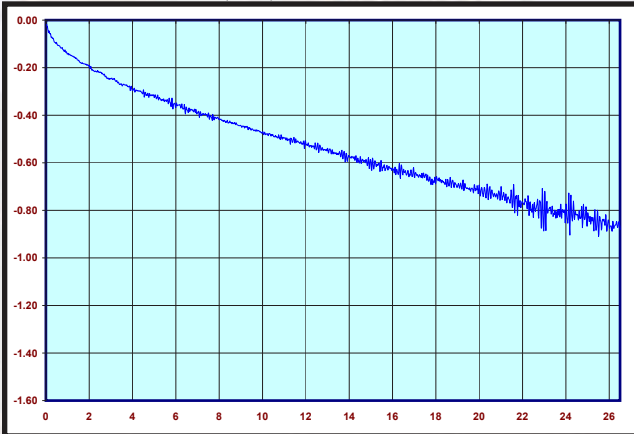

PN: CCSMA26.5-MM-086-7
VSWR (S22)

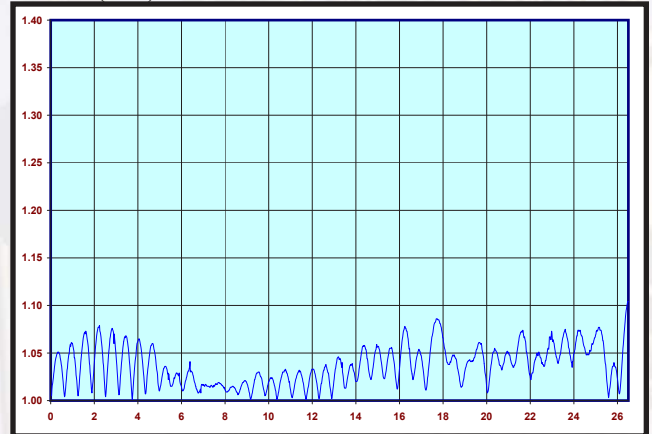

CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913
PHONE: 239-561-3311 • 800-237-3061 Rev.: C
FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 10-10-22



CRYSTEK MICROWAVE


A DIVISION OF CRYSTEK CORPORATION

26.5 GHZ HAND FORMABLE .086 COAX CABLES




Data plots contained within this specification are generated from actual production cable assemblies. This data represents the typical performance that can be expected from each cable assembly. The data is plotted from raw data without modification (ie: Smoothing or Averaging.)


PN: CCSMA26.5-MM-086-8
VSWR (S11)

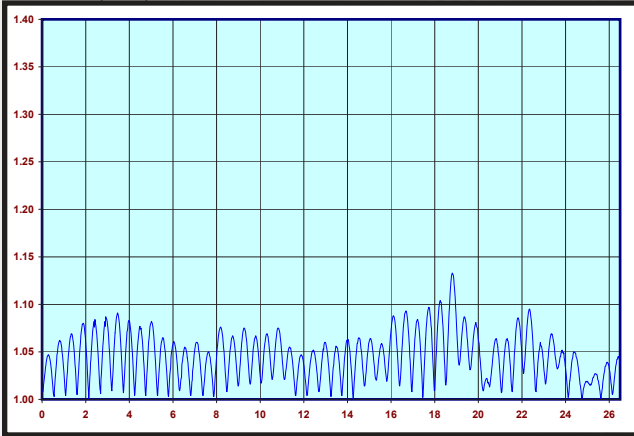


PN: CCSMA26.5-MM-086-8
INSERTION LOSS (S12)

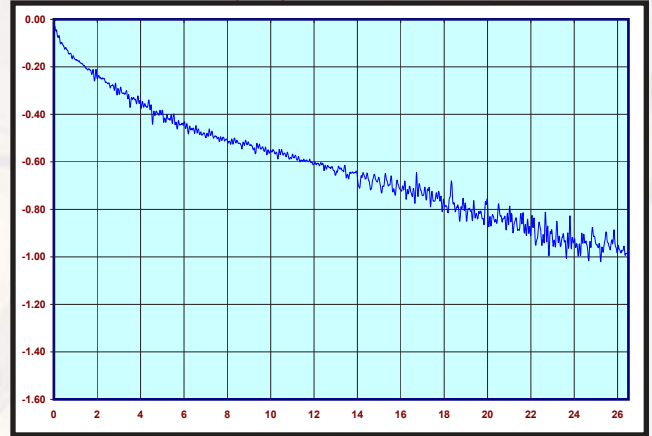

PN: CCSMA26.5-MM-086-8
INSERTION LOSS (S21)

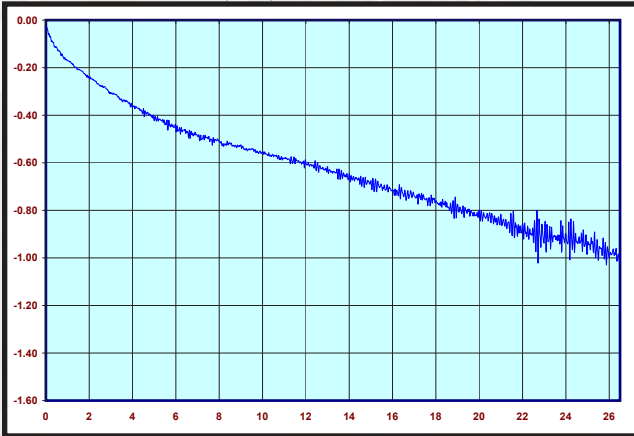

PN: CCSMA26.5-MM-086-8
VSWR (S22)

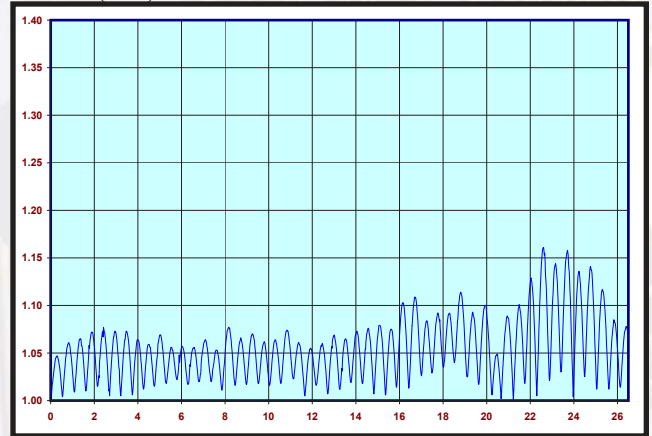

CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913
PHONE: 239-561-3311 • 800-237-3061 Rev.: C
FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 10-10-22



CRYSTEK MICROWAVE


A DIVISION OF CRYSTEK CORPORATION

26.5 GHZ HAND FORMABLE .086 COAX CABLES




Data plots contained within this specification are generated from actual production cable assemblies. This data represents the typical performance that can be expected from each cable assembly. The data is plotted from raw data without modification (ie: Smoothing or Averaging.)


PN: CCSMA26.5-MM-086-10
VSWR (S11)

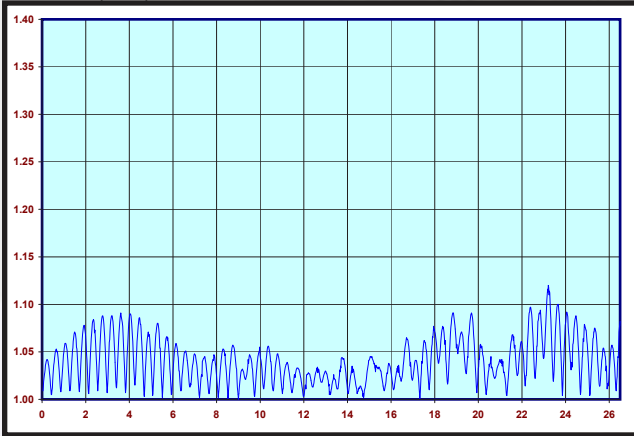


PN: CCSMA26.5-MM-086-10
INSERTION LOSS (S12)

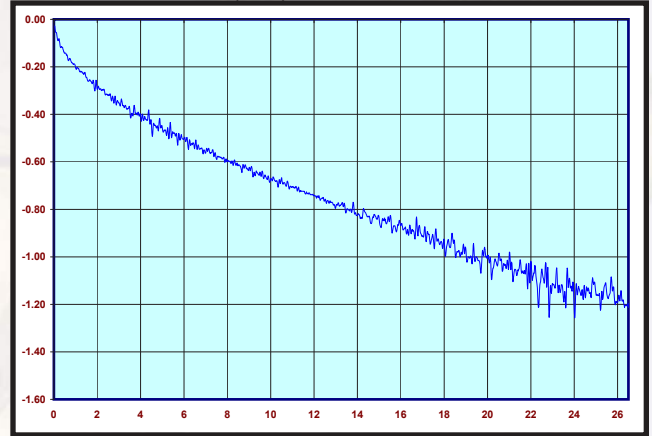

PN: CCSMA26.5-MM-086-10
INSERTION LOSS (S21)

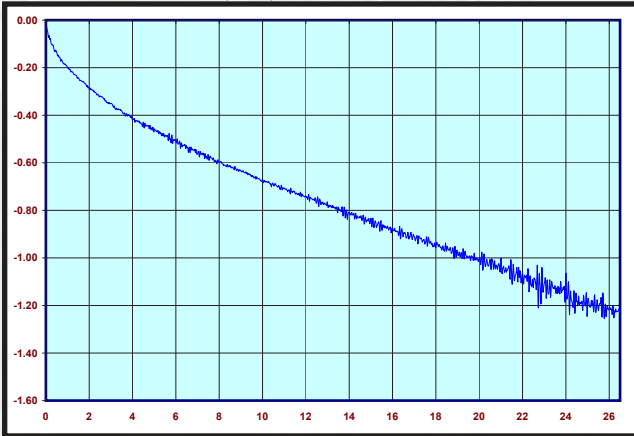

PN: CCSMA26.5-MM-086-10
VSWR (S22)

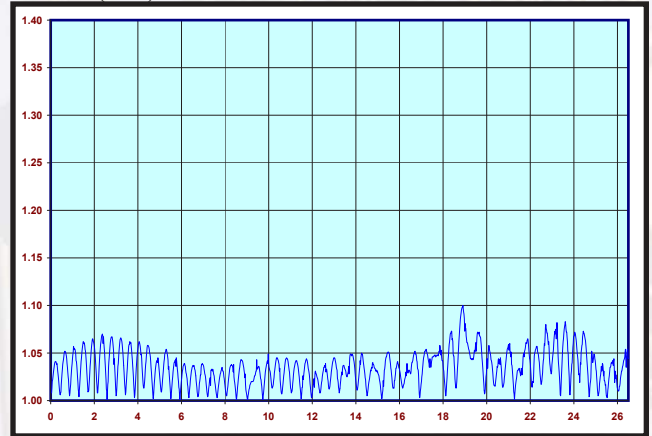

CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913
PHONE: 239-561-3311 • 800-237-3061 Rev: C
FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 10-10-22



CRYSTEK MICROWAVE


A DIVISION OF CRYSTEK CORPORATION

26.5 GHZ HAND FORMABLE .086 COAX CABLES




Data plots contained within this specification are generated from actual production cable assemblies. This data represents the typical performance that can be expected from each cable assembly. The data is plotted from raw data without modification (ie: Smoothing or Averaging.)


PN: CCSMA26.5-MM-086-12
VSWR (S11)

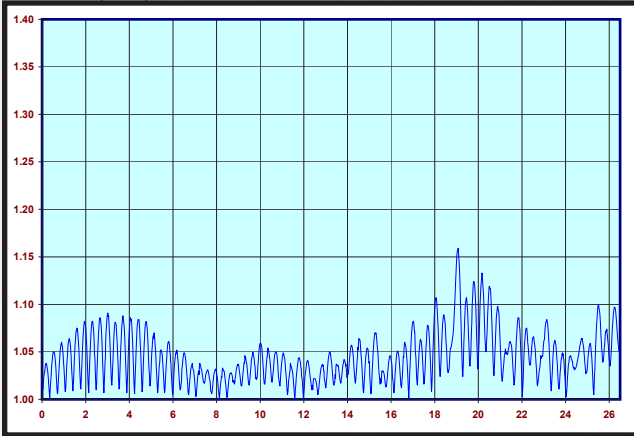


PN: CCSMA26.5-MM-086-12
INSERTION LOSS (S12)

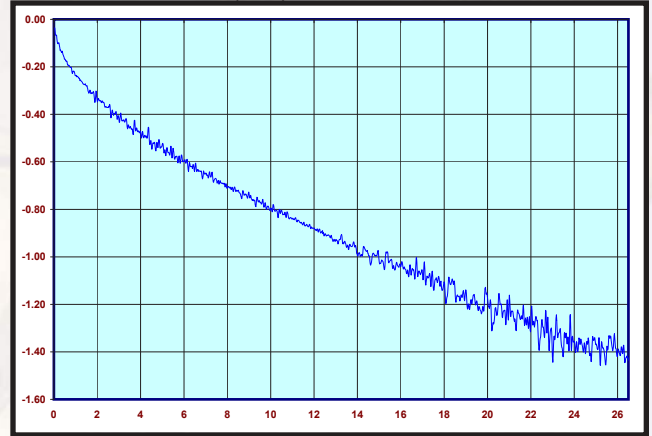

PN: CCSMA26.5-MM-086-12
INSERTION LOSS (S21)

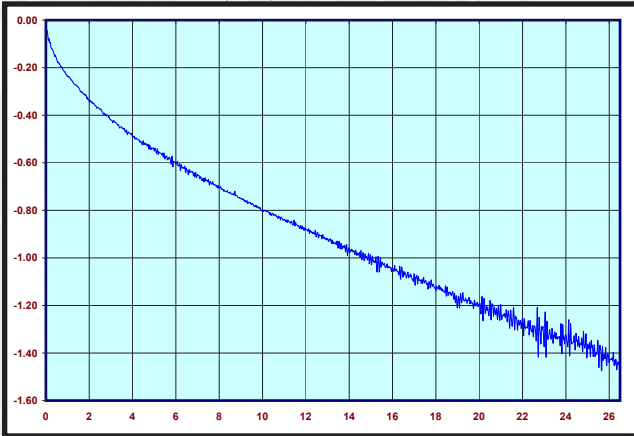

PN: CCSMA26.5-MM-086-12
VSWR (S22)

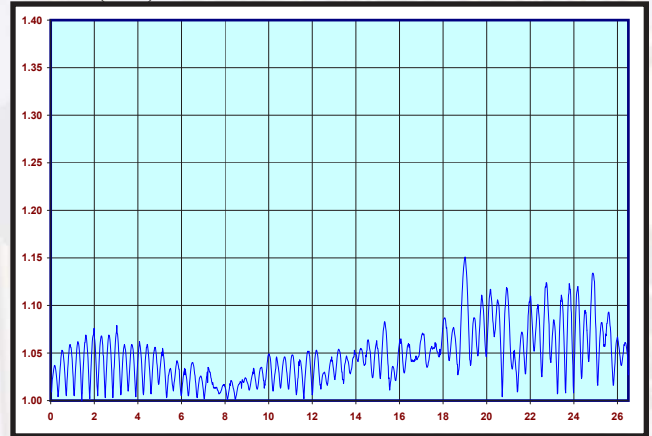

CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913
PHONE: 239-561-3311 • 800-237-3061 Rev.: C
FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 10-10-22