



**intercontec**  
products

# 623 Receptacle

**speedtec** - ready

**12-pin  
insulation insert uncoded  
housing code 1  
flange mount / Flange 25x25  
Anti-vibration o-ring**

## Technical Data

number of pins 12  
temperature range -20 °C to 130 °C  
protection type when connected IP 66/67

## Electrical Data

rated current max. 7 A\*  
rated voltage 160 V (AC/DC)  
rated insulation voltage (L-L) 2500 V

## signal

mating cycles 500

## Data according to VDE 0110/EN61984, Paragraph 6.19.2.2

pollution degree 3  
over voltage category III  
max. height for operation 2000 m

## Material

housing zinc diecast / nickel plated  
insulation insert PBT, UL 94 / V0  
seals FKM

**Contacts** (not part of product contents)

**Tools** (not part of product contents)

**A EG A 114 NN 00 00 0201 000**

**A E A 114 N 00 00 0201 000**



**Contact Arrangement**  
mating view




© 2018 TE Connectivity

TE Connectivity, TE connectivity (logo), intercontec (logo) and speedtec are trademarks.

While TE Connectivity (TE) has made every reasonable effort to ensure the accuracy of the information in this presentation, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this article are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

TE Connectivity Industrial GmbH  
Bernrieder Straße 15  
94559 Niederwinkling, Deutschland  
Tel.: +49 9962 2002-0  
Fax: +49 9962 2002-70  
E-Mail: intercontec@te.com  
Web: www.intercontec.biz

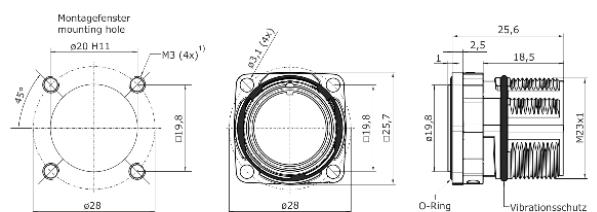

<sup>1</sup> Bei Bohrung M3 Sonderschraube mit dünnem Kopfdurchmesser verwenden, siehe Zubehör! Alternativ auch Gewinde M2,5 möglich

<sup>11</sup> For M3 bore use special screw with thin head diameter, see accessories! possible also with thread M2.5

## Main Dimensions

Receptacle

\*for max. wire cross-section pay attention to the cross-section of used contacts