

■ Lighting

- High Luminosity LEDs
 - LED Modules
 - LED Drivers
- Ambient Light Sensors



Pack performance into the smallest dimensions with Sharp's solutions for Lighting, Sensing, and Power handling. Sharp's Lighting, Drivers, Power handling, and Sensing modules are specifically designed for engineers with small applications demanding higher packaging density and a smaller end product.

Combine our Lighting with our Driver and Sensing modules for a complete solution. Sharp's Sensors provide the best cost/performance numbers in the industry, while Sharp's Photointerrupters are at the forefront in size and ambient light management. Sharp's Distance Sensors outperform capacitive, ultrasonic, and light-intensity offerings.

High Luminosity LEDs



Model No.	Emitting Color	Forward Voltage (V)		Color Coordinates (x, y) or Wavelength (nm)	Luminous Intensity (mcd)	I _F (mA)	Package (L × W × Thickness)
		TYP.	MAX.				
GM1BW76340A	White	14.0	15.0	(0.31, 0.31)	45 lumen, 14,000 mcd	50	2.64 × 1.64 × 0.7 mm
GM1BW76341A	White	14.0	15.0	(0.34, 0.36)	36 lumen, 11,000 mcd	50	2.64 × 1.64 × 0.7 mm
GM5BW01300A	White	3.6	4.5	(0.31, 0.31)	4,200	35	6.0 × 5.0 × 1.5 mm
GM5BW05340A	White	3.2	4.0	(0.31, 0.31)	10,000	20	5.0 × 5.0 × 1.5 mm
GM5BW05341A	White	3.2	4.0	(0.31, 0.31)	10,000	20	5.0 × 5.0 × 1.5 mm
GM5BW96320A	White	3.3	3.9	(0.31, 0.31)	1,400	20	3.2 × 2.8 × 1.9 mm
GM5BW96370A	White	3.2	3.9	(0.31, 0.31)	2,000	20	3.2 × 2.8 × 1.9 mm
GM5BW96380A	White	3.2	3.9	(0.34, 0.36)	2,400	20	3.2 × 2.8 × 1.9 mm

NOTE: Ta = 25°C

LED Modules

Model No.	Type	I _F (mA)	Color Coordinate		Chromaticity (°K)	Total Flux (lm)	Luminous Efficiency (lm/W)	Package
			x	y				
GW5BWC15L02	Normal white	360	0.35	0.35	5,000	280	78	18 × 18 mm
GW5BDC15L02	Light bulb color	360	0.45	0.41	2,800	200	53	18 × 18 mm
GW5BNC15L02	High color rendering	360	0.35	0.35	5,000	190	47	18 × 18 mm
GW5BNC15L12	High color rendering	360	0.31	0.32	6,500	190	47	18 × 18 mm

NOTE: See LED Module Colorimetry figures below.

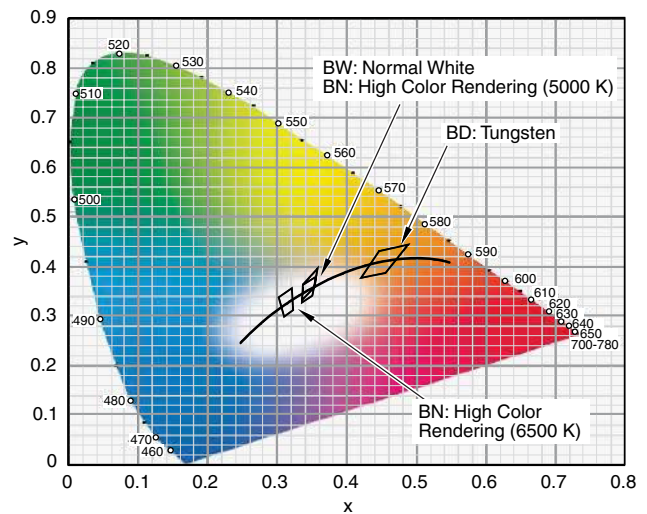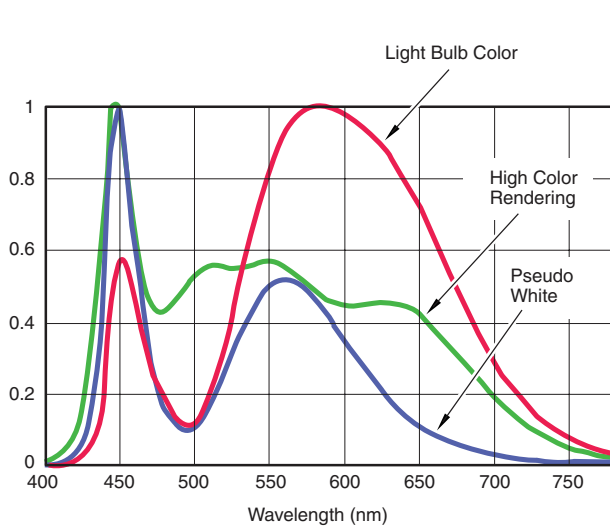

LED Module Colorimetry

LED Drivers

Model No.	LED Configuration		RGB	White	Input Voltage (V)	Output Current (mA)	Step-up Switching Frequency (Hz)	LED Anode Voltage Supply Source	Control	Package	Package Dimensions (mm)
	(parallel)	(series)									
IR2D07	16	N/A	N/A	N/A	3.0 – 5.5	55	N/A	External (to 7.0 V)	3-line serial	28-pin SDIP	8.6 × 25.5 × 4.4
IR2D20U	8+8+8	N/A	N/A	N/A	4.5 – 5.5	30	N/A	External (to 18 V)	3-line serial	52-pin HQFN	7.2 × 7.2 × 0.92
IR2E46Y7	3	2 sets of 2 LEDs in series	1 pair	2 sets of 2 LEDs in series	2.7 – 4.5	155	1.2M	External (to 4.5 V) Built-in step-up Coil	I ² C bus	33-pin WLCSP	3.6 × 3.6 × 0.82
IR2E49U6	5	5 sets of 7 LEDs in series	N/A	5 sets of 7 LEDs in series	6 – 28	150	100k – 1M	Built-in step-up Coil	Logic input	36-pin VQFN	6.2 × 6.2 × 1.0
	35 (5 × 7) possible										
IR2E51Y7	4 (W) + 2 (W) + 3 (RGB)	N/A	1 pair	6 LEDs (4+2) in parallel	3.0 – 4.5 2.3 – 3.2	25	500k	Built-in step-up Charge pump	I ² C bus	35-pin WLCSP	3.6 × 3.6 × 0.82
IR2E53Y7	6 (RGB)	18 sets of 6 LEDs in series	6	18 LEDs	3.0 – 4.5 2.3 – 3.2	25.9	660k	Built-in step-up Charge pump	I ² C bus	35-pin WLCSP	3.57 × 3.57 × 0.875
PQ6CB11X1CP	N/A	1 set of 6 LEDs in series	N/A	6 LEDs in series	2.7 – 5.5	250	1.2M	Built-in step-up Coil	Logic input	6-pin SMD	1.8 × 2.0 × 0.8

Ambient Light Sensors

Model No.	Type	Package	Absolute Maximum Ratings		Electro-optical Characteristics						
			V _{CC} (V)	I _o (mA)	T _{opr} (°C)	Supply Voltage V _{CC} (V)	Illuminance Range Ex (lx)	Dissipation Current I _{CC} (μA) TYP.	Peak Sensitivity Wavelength λ _p (nm)	Output Current	
										I _{o1} (μA) TYP.	I _{o2} (μA) TYP.
GA1A2S100SS	Built-in amplification circuit. Peak sensitivity characteristic close to human vision: Linear current output. Straight leads.	Transparent resin (3 × 4 mm)	7.0	5	-40 to +85	2.7 to 3.6	10 to 10,000	500	555	480 (at Ev = 1,000 lx)	48 (at Ev = 100 lx)
GA1A2S100LY	Built-in amplification circuit. Peak sensitivity characteristic close to human vision: Linear current output. L-bend leads.		7.0	5	-40 to +85	2.7 to 3.6	10 to 10,000	500	555	480 (at Ev = 1,000 lx)	48 (at Ev = 100 lx)
GA1A1S201WP	Built-in amplification circuit. Peak sensitivity characteristic close to human vision: Logarithmic current output.	Compact (2.0 × 1.6 mm) Leadless	7.0	1	-40 to +85	2.3 to 3.2	3 to 55,000	70	555	20 (at Ev = 100 lx)	30 (at Ev = 1,000 lx)



GA1A2S100SS



GA1A2S100LY



GA1A1S201WP

Electronic Components Group



NORTH AMERICA

Sharp Microelectronics of the Americas
5700 NW Pacific Rim Blvd.
Camas, WA 98607, U.S.A.
Phone: (1) 360-834-2500
Fax: (1) 360-834-8903
www.sharpsma.com

TAIWAN

Sharp Electronic Components
(Taiwan) Corporation
8F-A, No. 16, Sec. 4, Nanking E. Rd.
Taipei, Taiwan, Republic of China
Phone: (886) 2-2577-7341
Fax: (886) 2-2577-7326/2-2577-7328

CHINA

Sharp Microelectronics of China
(Shanghai) Co., Ltd.
28 Xin Jin Qiao Road King Tower 16F
Pudong Shanghai, 201206 P.R. China
Phone: (86) 21-5854-7710/21-5834-6056
Fax: (86) 21-5854-4340/21-5834-6057
Head Office:
No. 360, Bashen Road,
Xin Development Bldg. 22
Waigaoqiao Free Trade Zone Shanghai
200131 P.R. China
Email: smc@china.global.sharp.co.jp

EUROPE

Sharp Microelectronics Europe
Division of Sharp Electronics (Europe) GmbH
Sonninstrasse 3
20097 Hamburg, Germany
Phone: (49) 40-2376-2286
Fax: (49) 40-2376-2232
www.sharpsme.com

SINGAPORE

Sharp Electronics (Singapore) PTE., Ltd.
438A, Alexandra Road, #05-01/02
Alexandra Technopark,
Singapore 119967
Phone: (65) 271-3566
Fax: (65) 271-3855

KOREA

Sharp Electronic Components
(Korea) Corporation
RM 501 Geosung B/D, 541
Dohwa-dong, Mapo-ku
Seoul 121-701, Korea
Phone: (82) 2-711-5813 ~ 8
Fax: (82) 2-711-5819

JAPAN

Sharp Corporation
Electronic Components & Devices
22-22 Nagaïke-cho, Abeno-Ku
Osaka 545-8522, Japan
Phone: (81) 6-6621-1221
Fax: (81) 6117-725300/6117-725301
www.sharp-world.com

HONG KONG

Sharp-Roxy (Hong Kong) Ltd.
3rd Business Division,
17/F, Admiralty Centre, Tower 1
18 Harcourt Road, Hong Kong
Phone: (852) 28229311
Fax: (852) 28660779
www.sharp.com.hk
Shenzhen Representative Office:
Room 13B1, Tower C,
Electronics Science & Technology Building
Shen Nan Zhong Road
Shenzhen, P.R. China
Phone: (86) 755-3273731
Fax: (86) 755-3273735



SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.
Suggested applications (if any) are for standard use; See Important Restrictions for limitations on special applications. See Limited Warranty for SHARP's product warranty. The Limited Warranty is in lieu, and exclusive of, all other warranties, express or implied. ALL EXPRESS AND IMPLIED WARRANTIES, INCLUDING THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR USE AND FITNESS FOR A PARTICULAR PURPOSE, ARE SPECIFICALLY EXCLUDED. In no event will SHARP be liable, or responsible in any way, for any incidental or consequential economic or property damage.