

1

2

3





4

5



6

7

A **④ USB3.0 COMPLIANT**

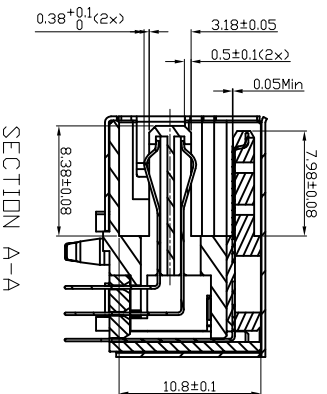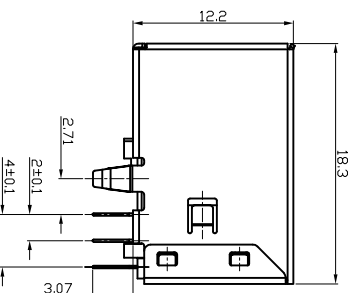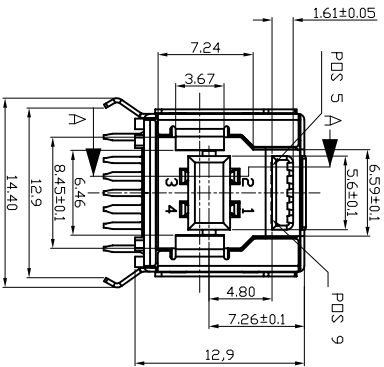

- NOTE:
- 1 MATERIAL:
 - ③ 1.1 INSULATOR: LCP UL 94V-0 Blue
 - 1.2 CONTACT: 1.4Ph, COPPERT=0.20mm) 5.9Ph, BRASS(T=0.20mm)
 - 1.3 SHELL: BRASS(T=0.30mm) SPCCT=0.20mm)
 - 2 ELECTRICAL CHARACTERISTICS:
 - 2.1 CONTACT RESISTANCE: 30mΩ MAXIMUM
 - 2.2 CONTACT CURRENT RATING: 1.5A
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 500 V R.M.S.
 - 2.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN
 - 2.5 OPERATING TEMPERATURE: -40°C ~ 85°C
 - 3 MECHANICAL CHARACTERISTICS:
 - 3.1 MATING FORCE: 3.97kg MAX
 - 3.2 UNMATING FORCE: 1.02kg MIN
 - 3.3 DURABILITY: MANDATORY: 5,000 CYCLES 4: PLATING
 - 4.1 TERMINAL: 50U" MIN NICKEL ALL OVER 80U" MIN TH ON SOLDER AREA
 - 4.2 SHELL: 1: 50U" MIN NICKEL

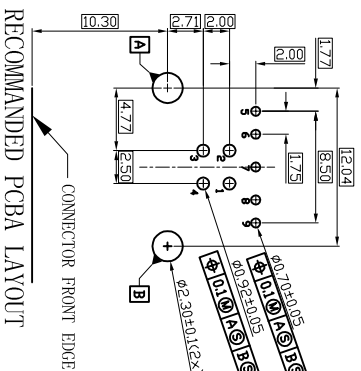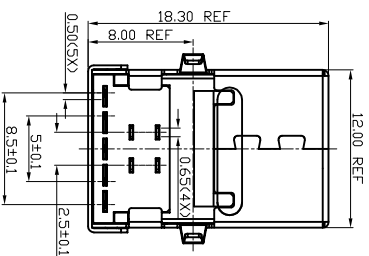

Pin NUMBER	SIGNAL NAME
1	V BUS
2	D-
3	D+
4	GND
5	StdB_ SSTX-
6	StdB_ SSTX+
7	GND_DRAIN
8	StdB_ SSRX-
9	StdB_ SSRX+
	Shell Shield

ROHS compliant
Unit: mm

Scale	Free	Id.	Modification	Date	Name
TOLERANCE	Free				
X.X	±0.20	④	Add the "USB3.0 COMPLIANT"	24.03.2014	Winnie
X.XX	±0.15	③	Update Color	18.03.2014	Winnie
X.XXX	±0.05	②	Update design	17.01.2012	Lucas
DIM	TOL	①	Add sheet 2	13.12.2011	Lucas
			Drawn	11.06.2010	Alex
Angle	±3°				

Customer-No.

ASSMANN WSW-No.

A-USB3 B

Drawing-No.

ASS 4224 CO

rev04



Replace

Sheet 1/2

1

2

3

4

5

6

7

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A

1

2

3

4

5

6

7

A



USB FEMALE BTYPE

17.5

355



255



TRAY

COVER

A

B

C


D

E

F

G

H

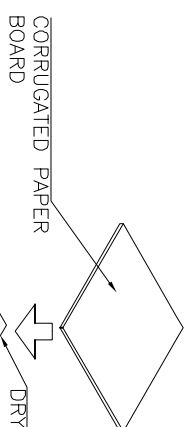

CORRUGATED PAPER BOARD

DRYING AGENT

WATER PROOF BAG

CARTON

120PCS/TRAY
17 TRAY/CARON
2040PCS/CARON

CORRUGATED PAPER BOARD



300mm

390mm

270mm

Customer-No.

ASSMANN WSW-No.

A-USB3 B

Drawing-No.

ASS 4224 CO

rev04



Replace

Scale	Free						
TOLERANCE		④	Add the "USB3.0 COMPLIANT"	24.03.2014	Winnie	Drawn	18.06.2010
X.X	±0.20	③	Update Color	18.03.2014	Winnie	Approved	24.03.2014
X.XX	±0.15	②	Update design	17.01.2012	Lucas		
X.XXX	±0.05	①	Add sheet 2	13.12.2011	Lucas		
DIM	TOL	①	Drawn	11.06.2010	Alex		
Angle	±3°		Modification				

ROHS compliant
Unit: mm

1

2

3

4

5

6

7

H