




160 MHz Bandpass Filter

Part Number: AE160B9995

Specifications:

- Center Frequency: 160 MHz
- Insertion Loss: <3 dB
- Passband 135-185 MHz <1dB flat
- Return Loss Passband >15dB
- Rejection: >30dB @ 0-80 MHz
 >50dB @ 240-2000 MHz
- Size: 1.5 x 0.5 x 0.4 inches

Outline Drawing:

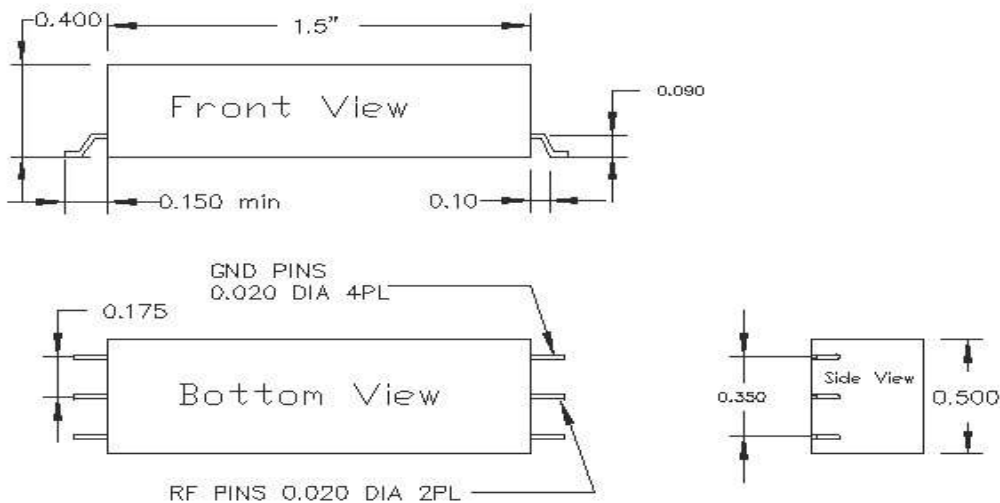

Rev. Date	Anatech Electronics Inc		
	Outline Drawing		
	01K0R2	986581	
0.15" 77/100			



ANATECH ELECTRONICS, INC.

Manufacturer of RF & Microwave Filters and Products




160 MHz Bandpass Filter

Part Number: AE160B9995

Response Plot:

17 Jan 2008 12:08:39
 CH1 S₁₁ log MAG 5 dB/ REF 0 dB 5: -21.79 dB
 CH2 S₂₁ log MAG 10 dB/ REF 0 dB 5: -60.29 dB

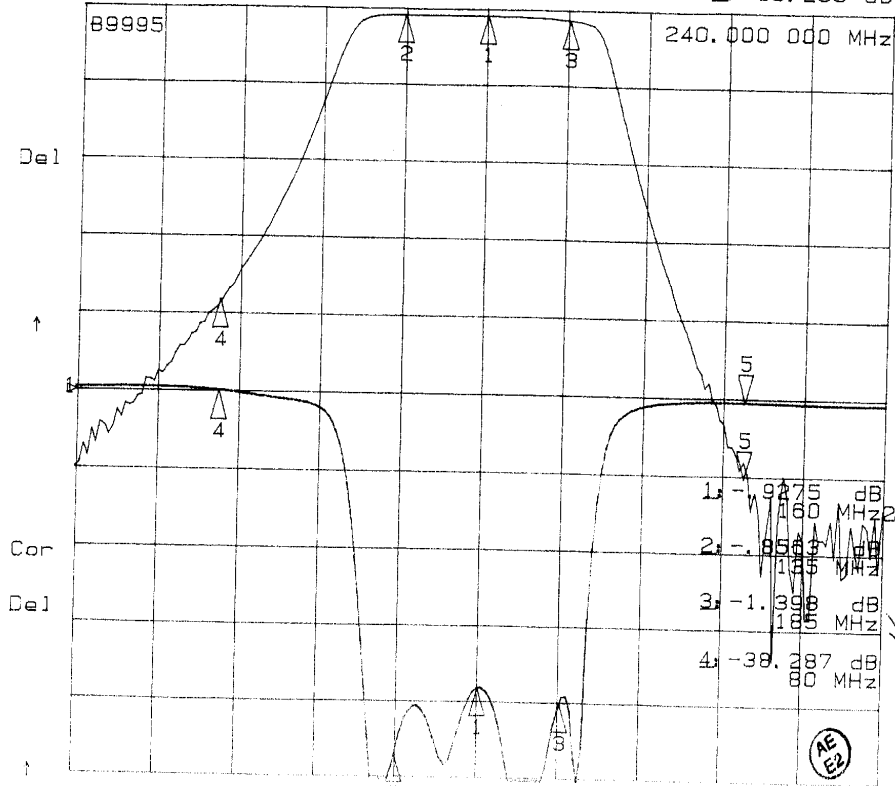

Handwritten signature