

## General Description


The V105A LVDS display interface transmitter is designed to support pixel data transmission between a video processing engine and a digital video display. The dual channel LVDS output supports pixel rates up to 150 MHz, enabling compatibility with 1080p and WUXGA display resolutions.

Total 67-bit LVCMS/LVTTL input is provided. The V105A converts the 67 bit parallel input data into two 5-pair LVDS (Low Voltage Differential Signaling) serial data outputs, in odd/even pixel format. Input data can be clocked on the rising or falling edge of the input clock (selectable). In video applications the 35 data bits are normally divided into 10 bits for each R, G and B channel and 5 control bits (which includes VSYNC, HSYNC and DE).


## Features

- Dual 32+3-bit LVTTL input supports up to 150 MHz pixel rate.
- Dual pixel, LVDS output supports 150 MHz pixel rate (compatible with 1080p and WUXGA resolution)
- Internal PLL requires no external loop filter
- Selectable rising or falling clock edge for data alignment
- Compatible with Spread Spectrum clock source
- Reduced LVDS output voltage swing mode (selectable) to minimize EMI
- Single 3.3 V supply
- Low power consumption CMOS design
- Power down mode
- Available in 144 pin LQFP package (14x14mm body size)

## Block Diagram

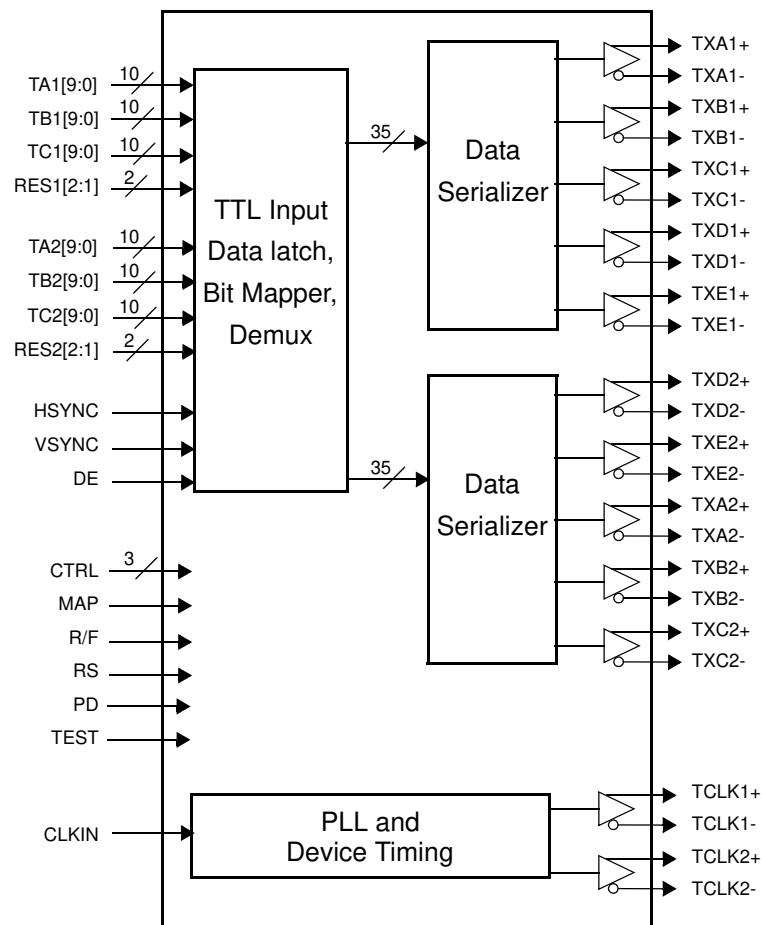

## Pin Assignment

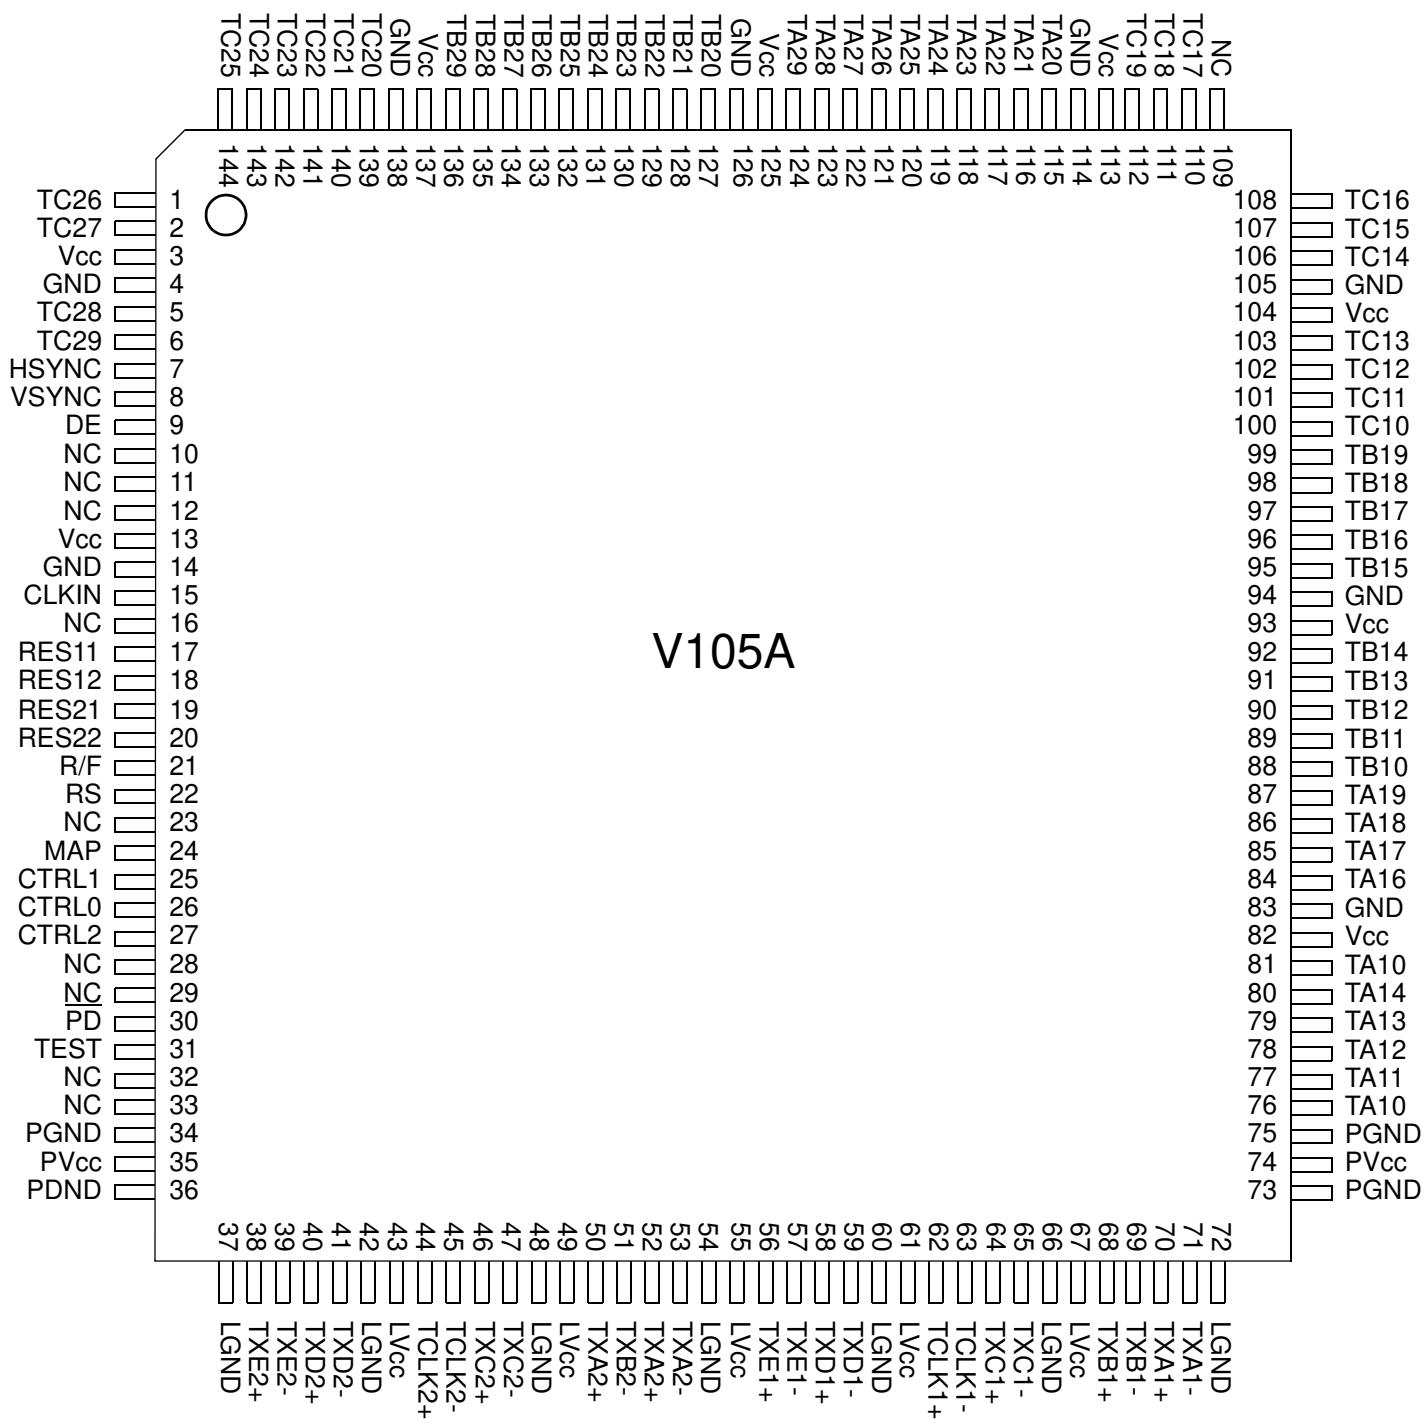

## Pin Descriptions

Pin Number	Pin Name	Pin Type	Pin Description
70, 71	TXA1+, TXA1-	LVDS OUT	LVDS Serial Data Output Pairs, Channel 1
68, 69	TXB1+, TXB1-		
64, 65	TXC1+, TXC1-		
58, 59	TXD1+, TXD1-		
56, 57	TXE1+, TXE1-		
52, 53	TXA2+, TXA2-		LVDS Serial Data Output Pairs, Channel 2
50, 51	TXB2+, TXB2-		
46, 47	TXC2+, TXC2-		
40, 41	TXD2+, TXD2-		
38, 39	TXE2+, TXE2-		
62, 63	TCLK1+, TCLK1-	LVDS OUT	LVDS Reference Clock Output Pair
44, 45	TCLK2+, TCLK2-		
76, 77, 78, 79, 80, 81, 84, 85, 86, 87	TA10 ~ TA19	IN	CMOS/TTL (or small signal) Data Bit Inputs, Channel 1
88, 89, 90, 91, 92, 95, 96, 97, 98, 99	TB10 ~ TB19		
100, 101, 102, 103, 106, 107, 108, 110, 111, 112	TC10 ~ TC19		
17, 18	RES11, RES12	IN	Control Input, Channel 1
115, 116, 117, 118, 119, 120, 121, 122, 123, 124	TA20 ~ TA29	IN	CMOS/TTL (or small signal) Data Bit Inputs, Channel 2
127, 128, 129, 130, 131, 132, 133, 134, 135, 136	TB20 ~ TB29		
139, 140, 141, 142, 143, 144, 1, 2, 5, 6	TC20 ~ TC29		
19, 20	RES21, RES22	IN	Control Input, Channel 2
7	HSYNC	IN	Hsync Input
8	VSYNC	IN	Vsync Input
9	DE	IN	DE Input
25, 26, 27	CTRL0 ~ CTRL2	IN	MODE Selection
24	MAP	IN	MAP MODE Selection
30	PD	IN	High: Normal device operation Low: Power down; all outputs become high impedance
31	TEST	IN	Reserved: tie to High or Low

Pin Number	Pin Name	Pin Type	Pin Description
22	RS	IN	Voltage level on this pin sets LVDS output swing voltage and data input swing voltage; refer to the table at the bottom of this page.
21	R/F	IN	Input Clock triggering edge select. High: Rising edge; Low: Falling edge.
3, 13, 82, 93, 104, 113, 125, 137	V <sub>CC</sub>	Power	Power supply pins for TTL inputs and digital circuitry
15	CLKIN	IN	Clock Input
4, 14, 83, 94, 105, 114, 126, 138	GND	Ground	Ground pins for TTL inputs and digital circuitry
43, 49, 55, 61, 67	LV <sub>CC</sub>	Power	Power supply pins for LVDS outputs
37, 42, 48, 54, 60, 66, 72	LGND	Ground	Ground pins for LVDS outputs
35, 74	PV <sub>CC</sub>	Power	Power supply pins for PLL circuitry
34, 36, 73, 75	PGND	Ground	Ground pins for PLL circuitry
10, 11, 12, 16, 23, 28, 29, 32, 33, 109	NC		Reserved

## RS Input Voltage LVDS Output Swing CMOS/TTL Input Configuration (Input Voltage Swing)

RS Input Voltage	LVDS Output Swing	CMOS/TTL Input Configuration (Input Voltage Swing)
V <sub>CC</sub>	350 mV	Standard Input and Output Configuration <sup>1</sup>
0.6 ~ 1.4 V (V <sub>REF</sub> <sup>1</sup> )	350 mV	Small Input Swing, Standard Output Swing Configuration <sup>1</sup>
GND	200 mV	Standard Input Swing, Reduced Output Swing Configuration <sup>1</sup>

1. Refer to DC Electrical Characteristics.

## External Components

Decoupling capacitors should be used for all power pins.

## Absolute Maximum Ratings

Item	Rating <sup>1</sup>
Supply Voltage, V <sub>CC</sub>	-0.3 V to +4.0 V
CMOS/TTL Input Voltage	-0.3 V to V <sub>CC</sub> +0.3 V
CMOS/TTL Output Voltage	-0.3 V to V <sub>CC</sub> +0.3 V
LVDS Driver Output Voltage	-0.3 V to V <sub>CC</sub> +0.3 V
Storage Temperature	-55 to +150°C
Junction Temperature	+125°C
LeadTemperature (10 seconds)	+260°C
Maximum Power Dissipation @ 25°C	1.15 W

1. Stresses greater than those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability

## Recommended Operation Conditions

Symbol	Parameter	Min.	Typ.	Max.	Units
V <sub>CC</sub>	Power Supply Voltage	+3	+3.3	+3.6	V
TA	Ambient Operating Temperature	0		+70	°C
CLK	CTRL<1:0> = LL (Dual-in/Dual-out)	Input	20	135	MHz
		LVDS Output	20	135	MHz
	CTRL<1:0> = LH (Dual-in/Single-out)	Input	10	67.5	MHz
		LVDS Output	20	135	MHz
	CTRL<1:0> = HL (Single-in/Dual-out)	Single Edge Input (CTRL<2> = L)	40	150	MHz
		LVDS Output	20	75	MHz
		Double Edge Input (CTRL<2> = H)	20	135	MHz
		LVDS Output	20	135	MHz
	CTRL<1:0> = HH (Single-in/Single-out)	Distribution Off (CTRL<2> = L)	Input 20	135	MHz
		LVDS Output	20	135	MHz
		Distribution On (CTRL<2> = H)	Input 20	135	MHz
		LVDS Output	20	135	MHz

## DC Electrical Characteristics

$V_{DD}=3.3\text{ V} \pm 10\%$ , Ambient temperature 0 to +70°C

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
<b>CMOS/TTL Inputs, Standard Configuration</b>						
Input High Voltage	$V_{IH}$	$RS=V_{CC}$ or GND	2.00		$V_{CC}$	V
Input Low Voltage	$V_{IL}$	$RS=V_{CC}$ or GND	GND		0.80	V
Input Current	$I_{INC}$	$0V < V_{IN} < V_{CC}$			$\pm 10$	$\mu A$
<b>CMOS/TTL Inputs, Small Input Swing Configuration</b>						
Max Input Swing Voltage	$V_{CCQ}^1$	$V_{REF} = V_{RS} = V_{CCQ}/2$	1.2		2.8	V
Input Reference Voltage into pin RS	$V_{REF}$			$V_{CCQ}/2$		V
High Level Input Voltage (for small input swing condition)	$V_{SH}^2$	$V_{REF}=V_{CCQ}/2$	$V_{CCQ}/2 + 0.1V$			V
Low Level Input Voltage (for small input swing condition)	$V_{SL}^2$	$V_{REF}=V_{CCQ}/2$			$V_{CCQ}/2 - 0.1V$	V

1.  $V_{CCQ}$  voltage defines the max voltage of the small swing input and is not an actual input into the device.
2. Small input swing voltage is applied to TA1[9:0], TB1[9:0], TC1[9:0], RES1[2:1], TA2[9:0], TB2[9:0], TC2[9:0], RES2[2:1], HSYNC, VSYNC, DE, and CLKN.

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
<b>LVDS Transmitter DC Specifications</b>						
Differential Output Voltage, $R_L = 100\Omega$	$V_{OD}$	Normal swing $RS = V_{CC}$	250	350	450	mV
		Reduced swing $RS = GND$	100	200	300	mV
Change in $V_{OD}$ Between Complimentary Output States	$DV_{OD}$				35	mV
Common Mode Voltage	$V_{OC}$	$RL = 100\Omega$	1.125	1.250	1.375	V
Change in $V_{OC}$ Between Complimentary Output States	$DV_{OC}$				35	mV
Output Short Circuit Current	$I_{OS}$	$V_{OUT} = 0V, R_L = 100\Omega$			-24	mA
Output Tri-State Current	$I_{OZ}$	$PD = 0V, V_{OUT} = 0V \text{ to } V_{CC}$			$\pm 10$	$\mu A$

Parameter	Symbol	Conditions	Typ	Max	Units
Supply Current Transmitter Supply Current (worst case pattern)	$I_{TCCW}$	CLKIN = 65MHz CLKIN = 85MHz CLKIN = 135MHz CLKIN = 65MHz CLKIN = 85MHz CLKIN = 135MHz CLKIN = 65MHz CLKIN = 85MHz CLKIN = 135MHz CLKIN = 150MHz CLKIN = 65MHz CLKIN = 85MHz CLKIN = 135MHz CLKIN = 32.5MHz CLKIN = 42.5MHz CLKIN = 67.5MHz CLKIN = 65MHz CLKIN = 85MHz CLKIN = 135MHz	$RL = 100\Omega$ $CL = 5pF$ $R_S = V_{CC}$	CTRL<1:0> = HH Single-in/Single-out CTRL<2> = L Distribution Off	41 mA
				54 mA	mA
				86 mA	mA
				68 mA	mA
				89 mA	mA
				141 mA	mA
				37 mA	mA
				38 mA	mA
				77 mA	mA
				85 mA	mA
				54 mA	mA
				71 mA	mA
				113 mA	mA
				35 mA	mA
				46 mA	mA
				73 mA	mA
				80 mA	mA
				104 mA	mA
				164 mA	mA
Transmitter Power Down Supply Current	$I_{TCCS}$	$\overline{PDWN} = L$ , All Inputs = Fixed L or H		10 $\mu A$	$\mu A$

## AC Electrical Characteristics

$V_{DD}=3.3\text{ V} \pm 10\%$ , Ambient temperature 0 to  $+70^\circ\text{C}$ , Mode=135 MHz

Parameter	Symbol	Min.	Typ.	Max.	Units
<b>Switching Characteristics</b>					
CLK IN Transition Time	$t_{TCIT}$			1.0	ns
CLK IN Period	$t_{TCP}$	6.7		100.0	ns
CLK IN High Time <sup>1</sup>	$t_{TCH}$	2.59	3.7	4.81	ns
CLK IN Low Time <sup>1</sup>	$t_{TCL}$	2.59	3.7	4.81	ns
CLK IN to TCLK± Delay	$t_{TCD}$		22.2		ns
TTL Data Setup to CLK IN	$t_{TS}$	2.5			ns
TTL Data Hold from CLK IN	$t_{TH}$	0			ns
LVDS Transition Time	$t_{LVT}$		0.6	1.5	ns
Output Data Position0	$t_{TOP1}$	-0.2	0.0	0.2	ns
Output Data Position1	$t_{TOP0}$	0.907	1.057	1.207	ns
Output Data Position2	$t_{TOP6}$	1.814	2.114	2.414	ns
Output Data Position3	$t_{TOP5}$	2.721	3.171	3.621	ns
Output Data Position4	$t_{TOP4}$	3.628	4.228	4.828	ns
Output Data Position5	$t_{TOP3}$	4.535	5.285	6.035	ns
Output Data Position6	$t_{TOP2}$	5.442	6.342	7.242	ns
Phase Lock Loop Set	$t_{TPLL}$			10.0	ms

1. See figure 1.

## Thermal Characteristics

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Thermal Resistance Junction to Ambient	$\theta_{JA}$	Still air		53		$^\circ\text{C/W}$
	$\theta_{JA}$	1 m/s air flow		40		$^\circ\text{C/W}$
	$\theta_{JA}$	3 m/s air flow		33		$^\circ\text{C/W}$
Thermal Resistance Junction to Case	$\theta_{JC}$			8		$^\circ\text{C/W}$

## AC Timing Diagrams

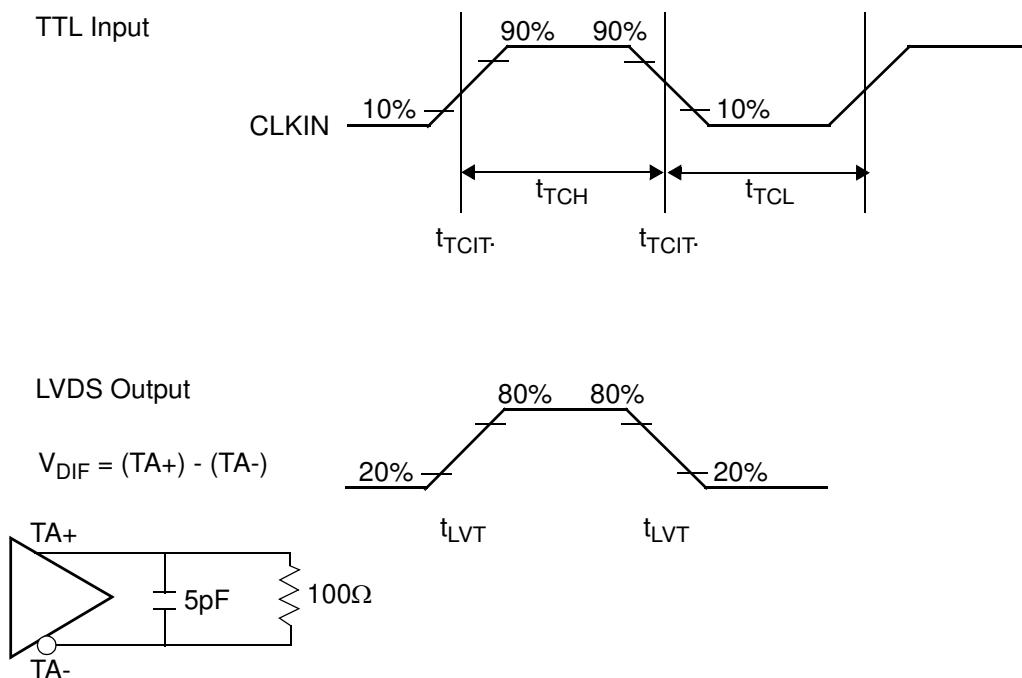


Figure 1.

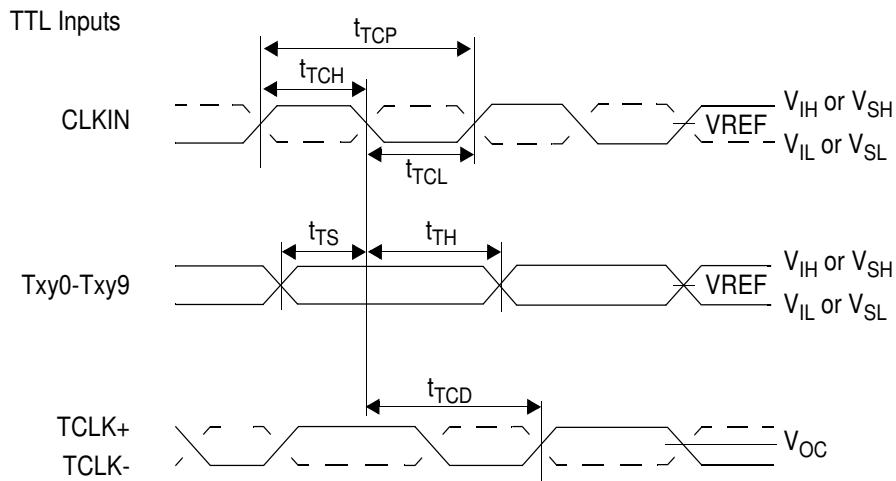


Figure 2.

LVDS Output

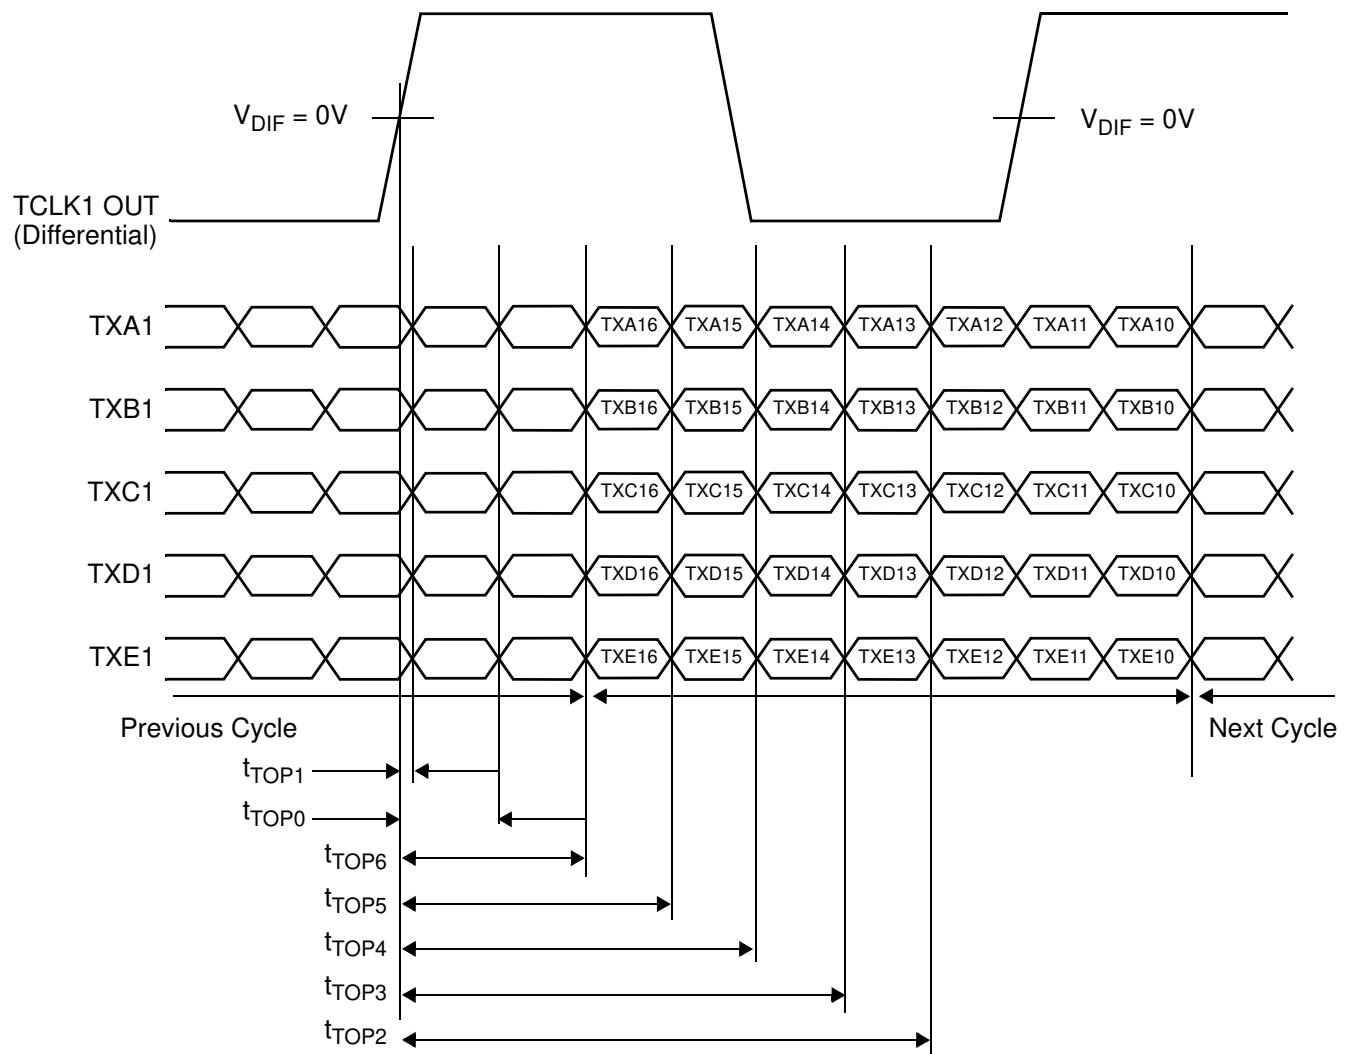


Figure 3.

LVDS Output

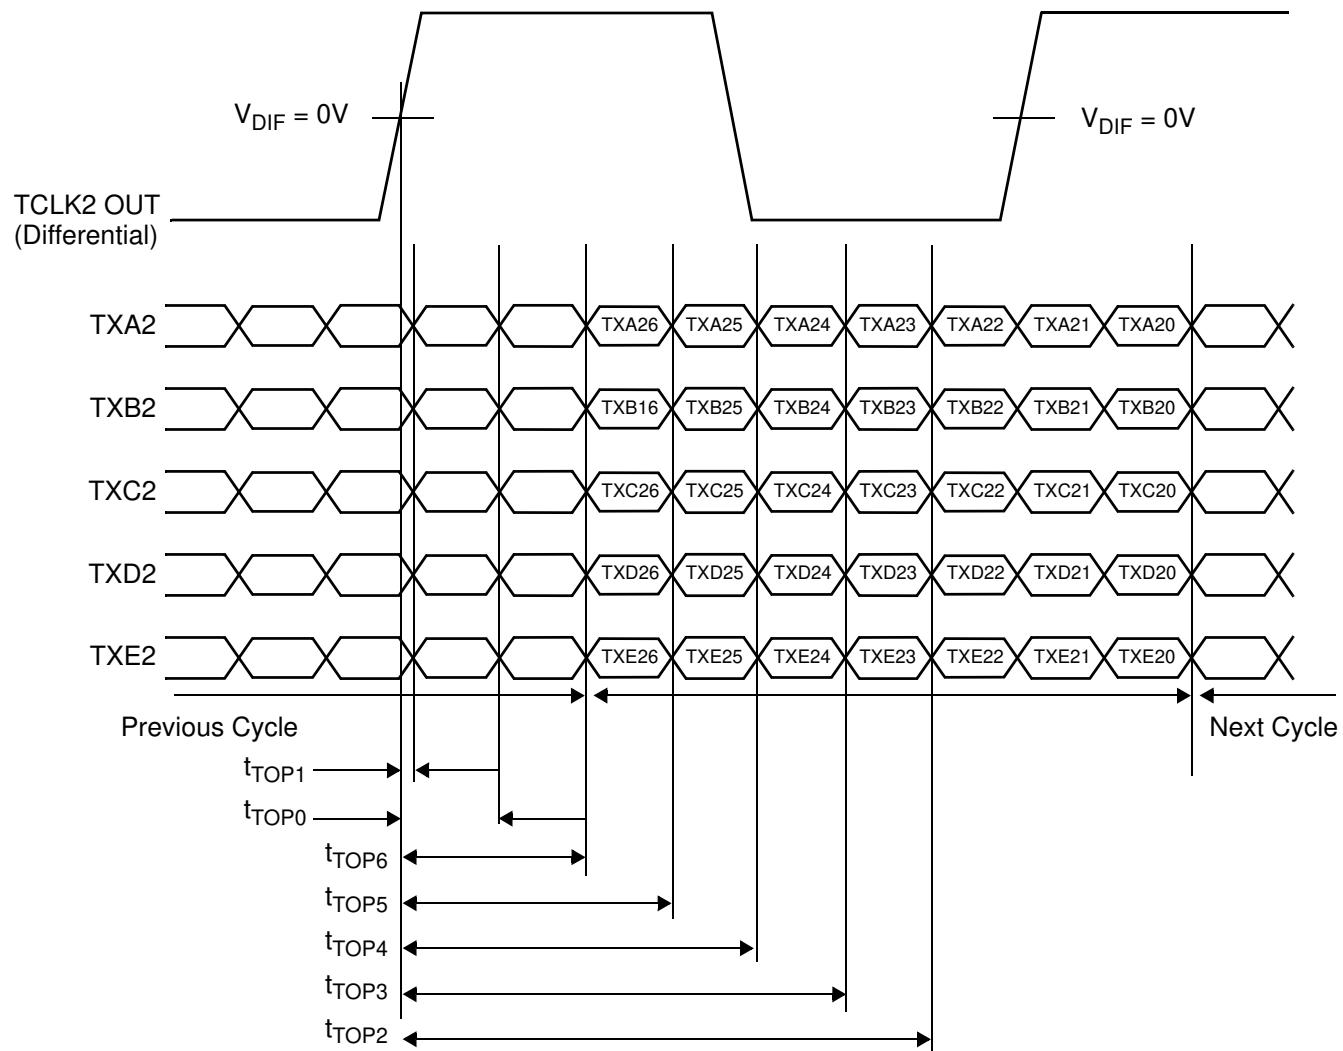


Figure 4.

Phase Lock Loop Time



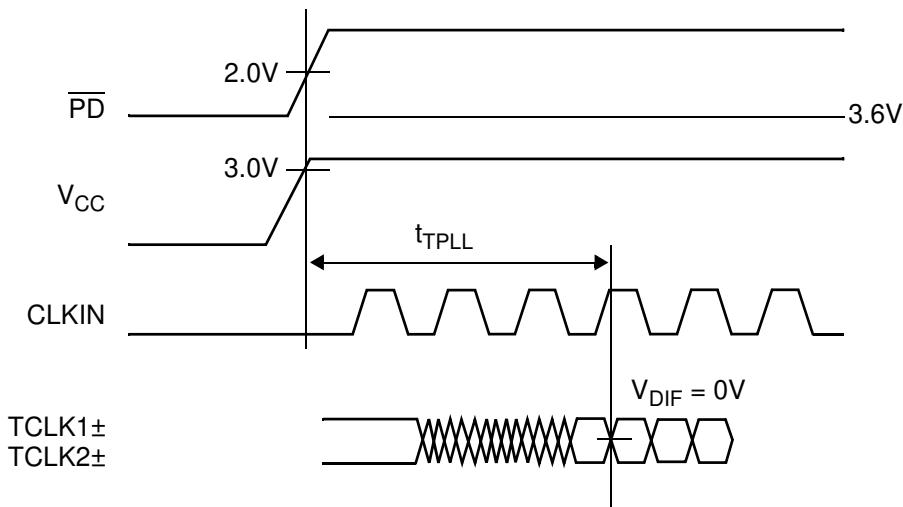


Figure 5.

LVDS Output Data Mapping

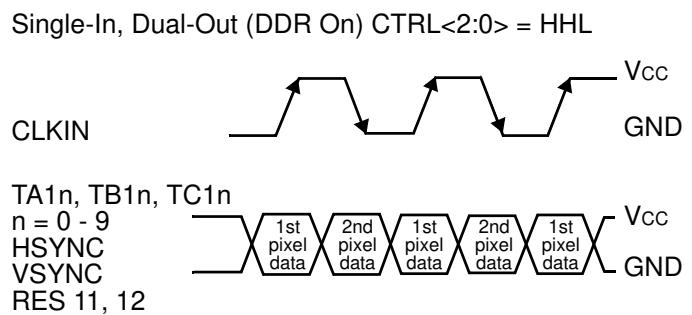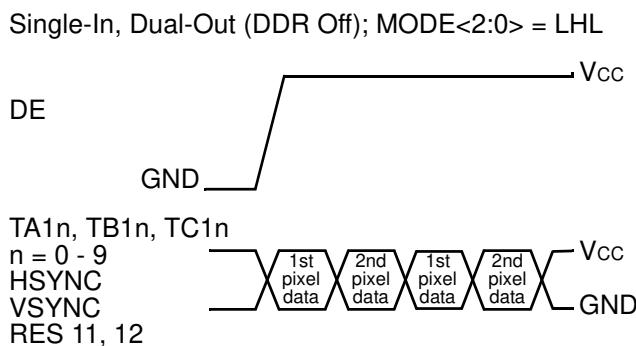

NOTE: CTRL2 = H (Double Edge Input)  
CLKIN for R/F = VCC, solid line  
CLKIN for R/F = GND, dashed line

Figure 6.

**Single-in/ Single-out Distribution Off: CTRL<2:0> = LHH**

LVDS Output Data	MAP = 1	MAP = 0
TXA1[0]	TA14	TA12
TXA1[1]	TA15	TA13
TXA1[2]	TA16	TA14
TXA1[3]	TA17	TA15
TXA1[4]	TA18	TA16
TXA1[5]	TA19	TA17
TXA1[6]	TB14	TB12
TXB1[0]	TB15	TB13
TXB1[1]	TB16	TB14
TXB1[2]	TB17	TB15
TXB1[3]	TB18	TB16
TXB1[4]	TB19	TB17
TXB1[5]	TC14	TC12
TXB1[6]	TC15	TC13
TXC1[0]	TC16	TC14
TXC1[1]	TC17	TC15
TXC1[2]	TC18	TC16
TXC1[3]	TC19	TC17
TXC1[4]	H SYNC	H SYNC
TXC1[5]	V SYNC	V SYNC
TXC1[6]	DE	DE
TXD1[0]	TA12	TA18
TXD1[1]	TA13	TA19
TXD1[2]	TB12	TB18
TXD1[3]	TB13	TB19
TXD1[4]	TC12	TC18
TXD1[5]	TC13	TC19
TXD1[6]	RES11	RES11
TXE1[0]	TA10	TA10
TXE1[1]	TA11	TA11
TXE1[2]	TB10	TB10
TXE1[3]	TB11	TB11
TXE1[4]	TC10	TC10
TXE1[5]	TC11	TC11
TXE1[6]	RES12	RES12

**Single-in/ Single-out Distribution On: CTRL<2:0> = HHH**

First Link			Second Link		
LVDS Output Data	MAP = 1	MAP = 0	LVDS Output Data	MAP = 1	MAP = 0
TXA1[0]	TA14	TA12	TXA2[0]	TA14	TA12
TXA1[1]	TA15	TA13	TXA2[1]	TA15	TA13
TXA1[2]	TA16	TA14	TXA2[2]	TA16	TA14
TXA1[3]	TA17	TA15	TXA2[3]	TA17	TA15
TXA1[4]	TA18	TA16	TXA2[4]	TA18	TA16
TXA1[5]	TA19	TA17	TXA2[5]	TA19	TA17
TXA1[6]	TB14	TB12	TXA2[6]	TB14	TB12
TXB1[0]	TB15	TB13	TXB2[0]	TB15	TB13
TXB1[1]	TB16	TB14	TXB2[1]	TB16	TB14
TXB1[2]	TB17	TB15	TXB2[2]	TB17	TB15
TXB1[3]	TB18	TB16	TXB2[3]	TB18	TB16
TXB1[4]	TB19	TB17	TXB2[4]	TB19	TB17
TXB1[5]	TC14	TC12	TXB2[5]	TC14	TC12
TXB1[6]	TC15	TC13	TXB2[6]	TC15	TC13
TXC1[0]	TC16	TC14	TXC2[0]	TC16	TC14
TXC1[1]	TC17	TC15	TXC2[1]	TC17	TC15
TXC1[2]	TC18	TC16	TXC2[2]	TC18	TC16
TXC1[3]	TC19	TC17	TXC2[3]	TC19	TC17
TXC1[4]	HSYNC	Hsync	TXC2[4]	Hsync	Hsync
TXC1[5]	VSYNC	Vsync	TXC2[5]	Vsync	Vsync
TXC1[6]	DE	DE	TXC2[6]	DE	DE
TXD1[0]	TA12	TA18	TXD2[0]	TA12	TA18
TXD1[1]	TA13	TA19	TXD2[1]	TA13	TA19
TXD1[2]	TB12	TB18	TXD2[2]	TB12	TB18
TXD1[3]	TB13	TB19	TXD2[3]	TB13	TB19
TXD1[4]	TC12	TC18	TXD2[4]	TC12	TC18
TXD1[5]	TC13	TC19	TXD2[5]	TC13	TC19
TXD1[6]	RES11	RES11	TXD2[6]	RES11	RES11
TXE1[0]	TA10	TA10	TXE2[0]	TA10	TA10
TXE1[1]	TA11	TA11	TXE2[1]	TA11	TA11
TXE1[2]	TB10	TB10	TXE2[2]	TB10	TB10
TXE1[3]	TB11	TB11	TXE2[3]	TB11	TB11
TXE1[4]	TC10	TC10	TXE2[4]	TC10	TC10
TXE1[5]	TC11	TC11	TXE2[5]	TC11	TC11
TXE1[6]	RES12	RES12	TXE2[6]	RES12	RES12

## Single-in/ Dual-out DDR On or OFF: CTRL<2:0> = HHL or LHL

First Pixel Data			Second Pixel Data		
LVDS Output Data	MAP = 1	MAP = 0	LVDS Output Data	MAP = 1	MAP = 0
TXA1[0]	TA14	TA12	TXA2[0]	TA14	TA12
TXA1[1]	TA15	TA13	TXA2[1]	TA15	TA13
TXA1[2]	TA16	TA14	TXA2[2]	TA16	TA14
TXA1[3]	TA17	TA15	TXA2[3]	TA17	TA15
TXA1[4]	TA18	TA16	TXA2[4]	TA18	TA16
TXA1[5]	TA19	TA17	TXA2[5]	TA19	TA17
TXA1[6]	TB14	TB12	TXA2[6]	TB14	TB12
TXB1[0]	TB15	TB13	TXB2[0]	TB15	TB13
TXB1[1]	TB16	TB14	TXB2[1]	TB16	TB14
TXB1[2]	TB17	TB15	TXB2[2]	TB17	TB15
TXB1[3]	TB18	TB16	TXB2[3]	TB18	TB16
TXB1[4]	TB19	TB17	TXB2[4]	TB19	TB17
TXB1[5]	TC14	TC12	TXB2[5]	TC14	TC12
TXB1[6]	TC15	TC13	TXB2[6]	TC15	TC13
TXC1[0]	TC16	TC14	TXC2[0]	TC16	TC14
TXC1[1]	TC17	TC15	TXC2[1]	TC17	TC15
TXC1[2]	TC18	TC16	TXC2[2]	TC18	TC16
TXC1[3]	TC19	TC17	TXC2[3]	TC19	TC17
TXC1[4]	HSYNC	Hsync	TXC2[4]	Hsync	Hsync
TXC1[5]	VSYNC	Vsync	TXC2[5]	Vsync	Vsync
TXC1[6]	DE	DE	TXC2[6]	DE	DE
TXD1[0]	TA12	TA18	TXD2[0]	TA12	TA18
TXD1[1]	TA13	TA19	TXD2[1]	TA13	TA19
TXD1[2]	TB12	TB18	TXD2[2]	TB12	TB18
TXD1[3]	TB13	TB19	TXD2[3]	TB13	TB19
TXD1[4]	TC12	TC18	TXD2[4]	TC12	TC18
TXD1[5]	TC13	TC19	TXD2[5]	TC13	TC19
TXD1[6]	RES11	RES11	TXD2[6]	RES11	RES11
TXE1[0]	TA10	TA10	TXE2[0]	TA10	TA10
TXE1[1]	TA11	TA11	TXE2[1]	TA11	TA11
TXE1[2]	TB10	TB10	TXE2[2]	TB10	TB10
TXE1[3]	TB11	TB11	TXE2[3]	TB11	TB11
TXE1[4]	TC10	TC10	TXE2[4]	TC10	TC10
TXE1[5]	TC11	TC11	TXE2[5]	TC11	TC11
TXE1[6]	RES12	RES12	TXE2[6]	RES12	RES12

**Dual-in/ Single-out: CTRL<2:0> = HLH or LLH**


First Pixel Data			Second Pixel Data		
LVDS Output Data	MAP = 1	MAP = 0	LVDS Output Data	MAP = 1	MAP = 0
TXA1[0](n)	TA14	TA12	TXA1[0](n+1)	TA24	TA22
TXA1[1](n)	TA15	TA13	TXA1[1](n+1)	TA25	TA23
TXA1[2](n)	TA16	TA14	TXA1[2](n+1)	TA26	TA24
TXA1[3](n)	TA17	TA15	TXA1[3](n+1)	TA27	TA25
TXA1[4](n)	TA18	TA16	TXA1[4](n+1)	TA28	TA26
TXA1[5](n)	TA19	TA17	TXA1[5](n+1)	TA29	TA27
TXA1[6](n)	TB14	TB12	TXA1[6](n+1)	TB24	TB22
TXB1[0](n)	TB15	TB13	TXB1[0](n+1)	TB25	TB23
TXB1[1](n)	TB16	TB14	TXB1[1](n+1)	TB26	TB24
TXB1[2](n)	TB17	TB15	TXB1[2](n+1)	TB27	TB25
TXB1[3](n)	TB18	TB16	TXB1[3](n+1)	TB28	TB26
TXB1[4](n)	TB19	TB17	TXB1[4](n+1)	TB29	TB27
TXB1[5](n)	TC14	TC12	TXB1[5](n+1)	TC24	TC22
TXB1[6](n)	TC15	TC13	TXB1[6](n+1)	TC25	TC23
TXC1[0](n)	TC16	TC14	TXC1[0](n+1)	TC26	TC24
TXC1[1](n)	TC17	TC15	TXC1[1](n+1)	TC27	TC25
TXC1[2](n)	TC18	TC16	TXC1[2](n+1)	TC28	TC26
TXC1[3](n)	TC19	TC17	TXC1[3](n+1)	TC29	TC27
TXC1[4](n)	HSYNC	Hsync	TXC1[4](n+1)	Hsync	Hsync
TXC1[5](n)	VSYNC	Vsync	TXC1[5](n+1)	Vsync	Vsync
TXC1[6](n)	DE	DE	TXC1[6](n+1)	DE	DE
TXD1[0](n)	TA12	TA18	TXD1[0](n+1)	TA22	TA28
TXD1[1](n)	TA13	TA19	TXD1[1](n+1)	TA23	TA29
TXD1[2](n)	TB12	TB18	TXD1[2](n+1)	TB22	TB28
TXD1[3](n)	TB13	TB19	TXD1[3](n+1)	TB23	TB29
TXD1[4](n)	TC12	TC18	TXD1[4](n+1)	TC22	TC28
TXD1[5](n)	TC13	TC19	TXD1[5](n+1)	TC23	TC29
TXD1[6](n)	RES11	RES11	TXD1[6](n+1)	RES21	RES21
TXE1[0](n)	TA10	TA10	TXE1[0](n+1)	TA20	TA20
TXE1[1](n)	TA11	TA11	TXE1[1](n+1)	TA21	TA21
TXE1[2](n)	TB10	TB10	TXE1[2](n+1)	TB20	TB20
TXE1[3](n)	TB11	TB11	TXE1[3](n+1)	TB21	TB21
TXE1[4](n)	TC10	TC10	TXE1[4](n+1)	TC20	TC20
TXE1[5](n)	TC11	TC11	TXE1[5](n+1)	TC21	TC21
TXE1[6](n)	RES12	RES12	TXE1[6](n+1)	RES22	RES22

**Dual-in/ Dual-out: CTRL<2:0> = HLL or LLL**

First Pixel Data			Second Pixel Data		
LVDS Output Data	MAP = 1	MAP = 0	LVDS Output Data	MAP = 1	MAP = 0
TXA1[0]	TA14	TA12	TXA2[0]	TA24	TA22
TXA1[1]	TA15	TA13	TXA2[1]	TA25	TA23
TXA1[2]	TA16	TA14	TXA2[2]	TA26	TA24
TXA1[3]	TA17	TA15	TXA2[3]	TA27	TA25
TXA1[4]	TA18	TA16	TXA2[4]	TA28	TA26
TXA1[5]	TA19	TA17	TXA2[5]	TA29	TA27
TXA1[6]	TB14	TB12	TXA2[6]	TB24	TB22
TXB1[0]	TB15	TB13	TXB2[0]	TB25	TB23
TXB1[1]	TB16	TB14	TXB2[1]	TB26	TB24
TXB1[2]	TB17	TB15	TXB2[2]	TB27	TB25
TXB1[3]	TB18	TB16	TXB2[3]	TB28	TB26
TXB1[4]	TB19	TB17	TXB2[4]	TB29	TB27
TXB1[5]	TC14	TC12	TXB2[5]	TC24	TC22
TXB1[6]	TC15	TC13	TXB2[6]	TC25	TC23
TXC1[0]	TC16	TC14	TXC2[0]	TC26	TC24
TXC1[1]	TC17	TC15	TXC2[1]	TC27	TC25
TXC1[2]	TC18	TC16	TXC2[2]	TC28	TC26
TXC1[3]	TC19	TC17	TXC2[3]	TC29	TC27
TXC1[4]	HSYNC	Hsync	TXC2[4]	Hsync	Hsync
TXC1[5]	VSYNC	Vsync	TXC2[5]	Vsync	Vsync
TXC1[6]	DE	DE	TXC2[6]	DE	DE
TXD1[0]	TA12	TA18	TXD2[0]	TA22	TA28
TXD1[1]	TA13	TA19	TXD2[1]	TA23	TA29
TXD1[2]	TB12	TB18	TXD2[2]	TB22	TB28
TXD1[3]	TB13	TB19	TXD2[3]	TB23	TB29
TXD1[4]	TC12	TC18	TXD2[4]	TC22	TC28
TXD1[5]	TC13	TC19	TXD2[5]	TC23	TC29
TXD1[6]	RES11	RES11	TXD2[6]	RES21	RES21
TXE1[0]	TA10	TA10	TXE2[0]	TA20	TA20
TXE1[1]	TA11	TA11	TXE2[1]	TA21	TA21
TXE1[2]	TB10	TB10	TXE2[2]	TB20	TB20
TXE1[3]	TB11	TB11	TXE2[3]	TB21	TB21
TXE1[4]	TC10	TC10	TXE2[4]	TC20	TC20
TXE1[5]	TC11	TC11	TXE2[5]	TC21	TC21
TXE1[6]	RES12	RES12	TXE2[6]	RES22	RES22

## Package Outline and Package Dimensions (144-pin LQFP)

Package dimensions are kept current with JEDEC Publication No. 95, variation ACD.

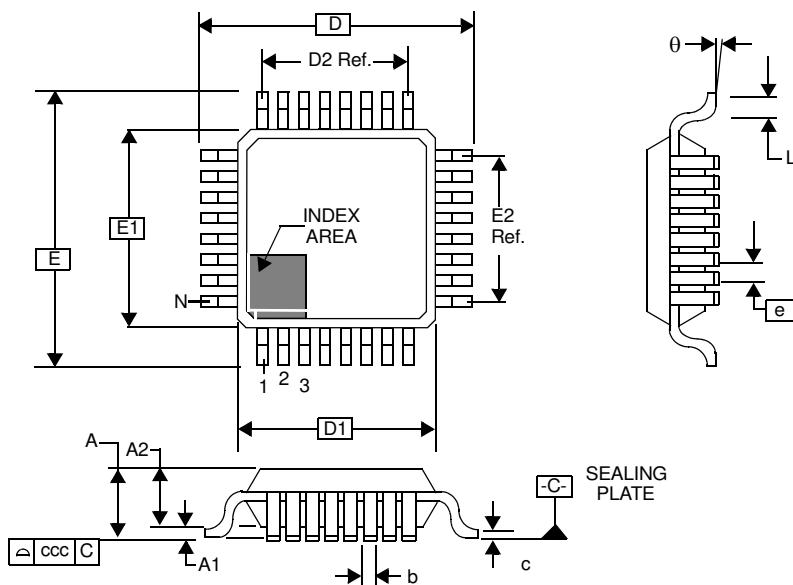


ALL DIMENSIONS ARE IN MILLIMETERS.

SYMBOL	In Millimeters COMMON DIMENSIONS		In Inches <sup>1</sup> COMMON DIMENSIONS	
	MIN	MAX	MIN	MAX
N	144		144	
A	—	1.60	—	.063
A1	0.05	0.15	.002	.006
A2	1.35	1.45	.053	.057
b	0.17	0.27	.007	.011
c	0.09	0.20	.004	.008
D	22.00 BASIC		.866 BASIC	
D1	20.00 BASIC		.787 BASIC	
D2	17.50 Ref.		.689 Ref.	
E	22.00 BASIC		.866 BASIC	
E1	20.00 BASIC		.787 BASIC	
E2	17.50 Ref.		.689 Ref.	
e	0.50 BASIC		.02 BASIC	
L	0.45	0.75	.018	.03
q	0°	7°	0°	7°
ccc	—	0.08	—	.003

1. For reference only. Controlling dimensions are in mm.

## Ordering Information

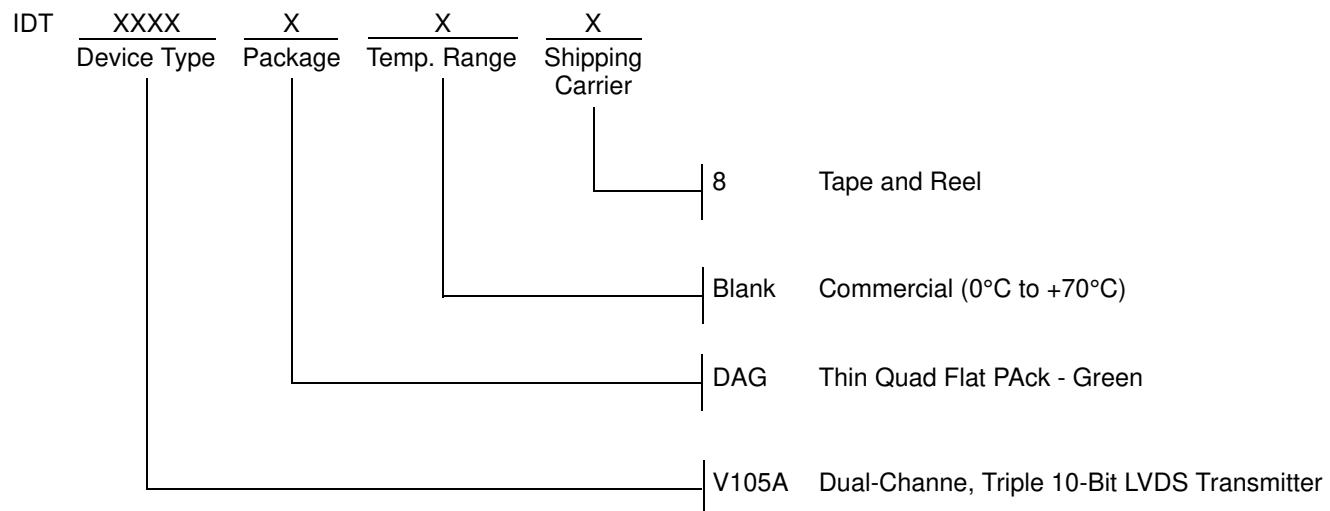

## **IMPORTANT NOTICE AND DISCLAIMER**

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES ("RENESAS") PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers skilled in the art designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only for development of an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising out of your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Disclaimer Rev.1.0 Mar 2020)

### **Corporate Headquarters**

TOYOSU FORESIA, 3-2-24 Toyosu,  
Koto-ku, Tokyo 135-0061, Japan  
[www.renesas.com](http://www.renesas.com)

### **Contact Information**

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:  
[www.renesas.com/contact/](http://www.renesas.com/contact/)

### **Trademarks**

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.