

BRUSHLESS MOTORS

With integral control



dc mind
BRUSHLESS
MOTORS



ABOUT CROUZET

The Motion product line provides innovative engineering expertise, high quality service and a complete offer of standard direct drives, geared motors and motion control solutions for applications where performance is key. Our ability to customize solutions as per virtually any customers' request makes us the right partner to tackle the most demanding projects.

Crouzet is a brand of InnoVista Sensors™.

With a long-term commitment to technological excellence, the engineering teams have mastered the following core technologies and know-how:

- › Electromagnetism
- › Thermal dynamics
- › Electromechanical systems
- › Electronic drives

Covering the power range from 1 to 1000 W peak (1/100 to 1HP+) and available with spur, worm or planetary gearboxes, plus adapted controllers, our offer is specifically designed for access control systems, pumps and valves, railway applications, electrical equipment, medical equipment and the industry.

INNOVISTA SENSORS

InnoVista Sensors™ is a worldwide industrial specialist of sensors, controllers and actuators for automated systems.

Through its brands, Crouzet and Sytron Donner Inertial, InnoVista Sensors™ offers a wide range of reliable, efficient and customizable components dedicated to the Aerospace & Defense, Transportation and Industrial markets and segments.

Thanks to the recognized expertise of its teams and a strong innovation policy, InnoVista Sensors™ brings performance enhancing solutions to its customers worldwide.

InnoVista Sensors™: your trusted partner of choice to face industrial challenges of today and tomorrow.

www.innovistasensors.com

Designs & Manufactures




For



ADAPTATION WHEEL

To meet market expectations and provide customers with the right solutions within the shortest timeframes, Crouzet has structured its processes around the different types of product available: standard products, adapted products or products specially developed for a customer.

Introducing the adaptation wheel...

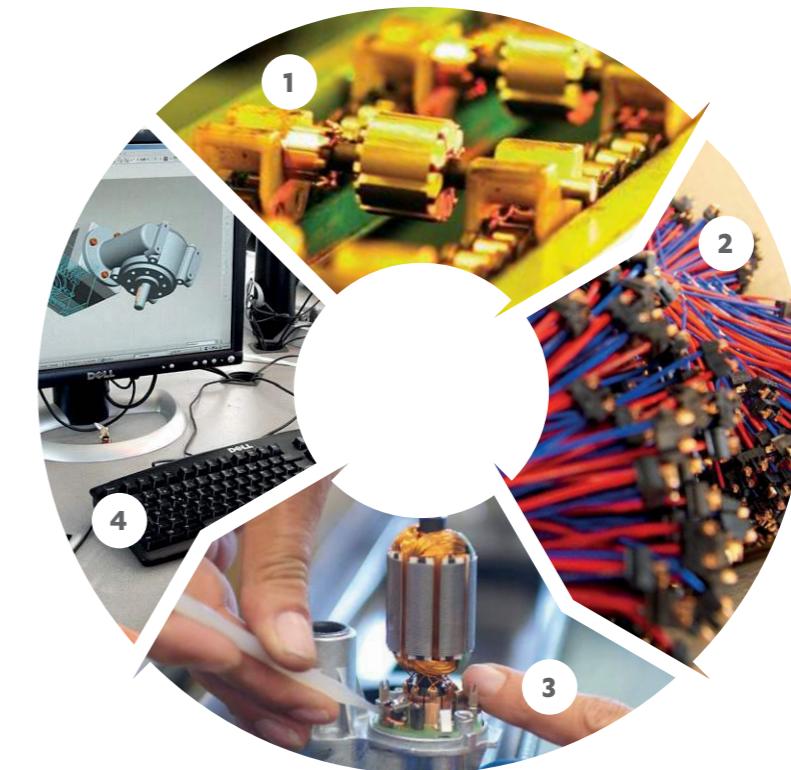

1 STANDARD PRODUCTS

Sales service

A full range of motors, geared motors and associated controllers. You can create your automation control applications as quickly as possible

2 PRODUCTS WITH ADDED VALUE

Customer Adaptation Centre

All our standard products can have additional factory-mounted auxiliaries or accessories: connectors, leads, special terminals, customized shafts, adaptor plates, etc. Seamless integration in your equipment means you benefit from simpler logistics and optimum installation reliability.

3 ADAPTED PRODUCTS

Customer Adaptation Centre

Defined in coordination between your project teams and our specialists, these adapted products have exactly the right levels of performance and functionality you need for your applications.

4 SPECIAL PRODUCTS

Engineers and teams Dedicated project

From the very start of a project, Crouzet's experts work closely with your teams to develop the specification. All our design, industrialization and approval expertise goes into developing Motion Control solutions that are tailored to your requirements.

DCmind BRUSHLESS

Crouzet, a specialist in customized motorization solutions, now presents its latest generation of High Performance Brushless motors with integrated electronics TNi21 and SMi21.

A pioneer on the European market in 2002 with the Motomate, a Brushless motor with integrated electronics incorporating an intuitive visual programming interface, Crouzet is blazing a new trail for compact standalone applications.

Crouzet, a company continually evolving to meet customer needs, has upgraded its ranges with accessories, gearboxes, part numbers and now, thanks to these electronic devices, has enhanced the performance of its products with:

- › more power
- › more accuracy
- › more functions
- › simplicity of use and ease of integration.

BRAKING AND HOLDING

With or without failsafe holding brake (active braking is performed by the motor electronics).

CONTROL

- › TNi21: 4 inputs and 3 outputs, torque and speed control on analog inputs with 10-bit resolution.
- › SMi21: 6 inputs and 4 outputs, the motor has a wide selection of programs which can be set via a PC (position, speed and torque) and can reach as many as 65,000 positions.

POWER SUPPLY


Single supply voltage needed across the whole voltage range:
 › TNi21 (10 - 36 VDC)
 › SMi21 (9 - 56 VDC)

TWO ELECTRONIC PILOT CONTROL DEVICES

- › The TNi21 for simpler applications, dedicated to speed and torque control.
- › The SMi21, dedicated to motion control for applications that require accuracy. Thanks to a 4096-point encoder, it offers all the following control functions: position, torque, speed, direction, braking, etc.

COMMUNICATING

A micro-USB socket on the motor (SMi21) can be used to link this directly to a PC.

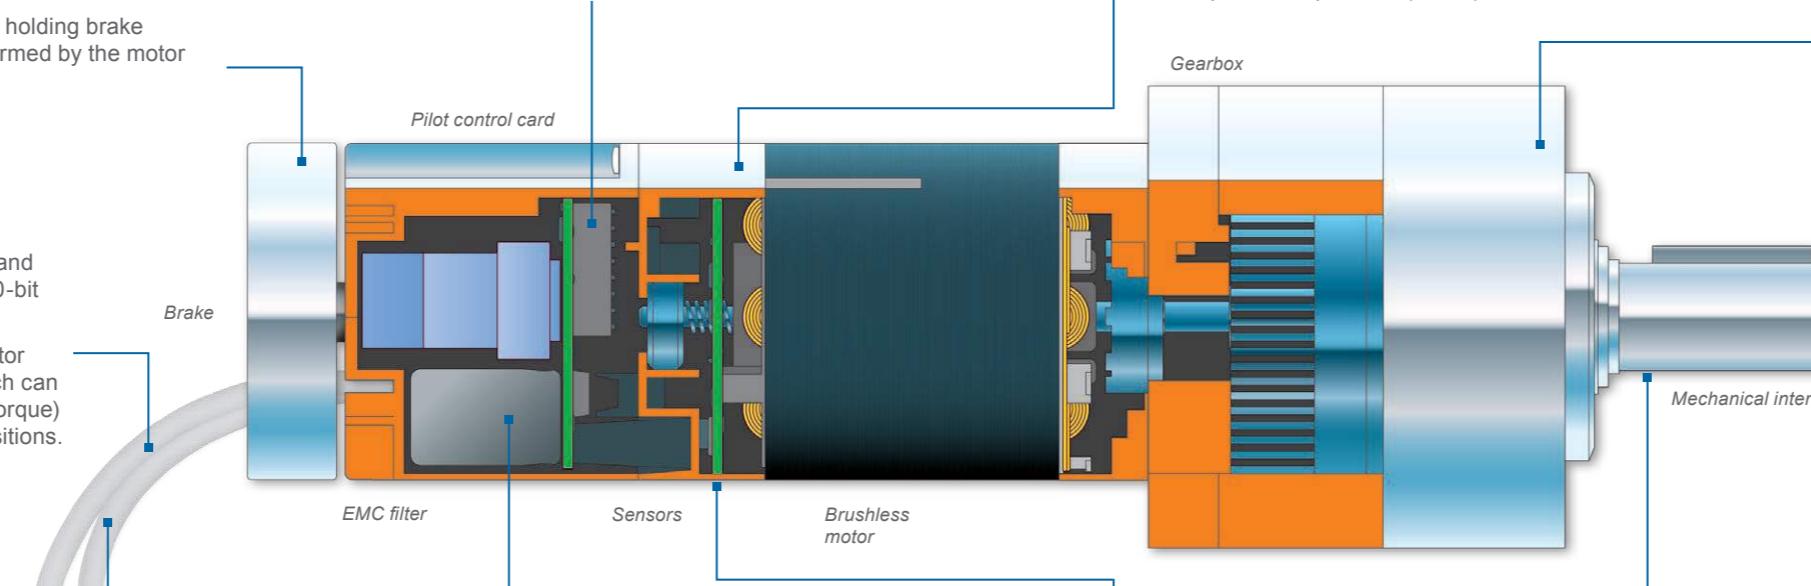

FILTERING AND PROTECTING

- › Short-circuits, undervoltages
- › EMC (received and transmitted)
- › Temperature
- › Mechanical (vibrations, shocks, etc.)

THE MOTOR'S INTEGRATED ELECTRONICS ALLOW YOU TO:

PRODUCT ADVANTAGES

- › Easy and accurate control thanks to an optimized control loop
- › Improved safety with internal thermal protection
- › Safe, reliable operation as a result of its excellent EMC characteristics, due to the shortest possible wiring and shielding with a metal cover

USER ADVANTAGES

- › Save time and improve reliability due to less wiring and fewer connections.
- › Control the logistic problem better with fewer part numbers to manage
- › Save space thanks to a more compact solution

PILOT CONTROL

Motor pilot control card for operation in 4 quadrants, sine operation (SMi21) or trapezoidal operation (TNi21).

GEARBOXES

Using Crouzet gearboxes, the motor speed and torque can be adapted to your applications from 0.01 to 4000 rpm and 0.1 to 120 Nm (0.9 to 1062 in-lbs).


INTEGRATION

Crouzet adapts the mechanical interfaces of its solutions for perfect integration in your equipment: fixing plate, transmission shafts, special pinions.

INTEGRATED ELECTRONICS

TNi21 SPEED AND TORQUE CONTROL:


- › 4 inputs, 3 outputs.
- › 2 x 10-bit analog inputs for fine-tuned speed and torque control.
- › 4 rejective quadrants.
- › Use on its own or in combination with other motors or controlled by a PLC.
- › Can be used in production immediately (without setup stage).
- › Also suitable for a 12 V or 24 V battery power supply (voltage range between 10 and 36 volts).

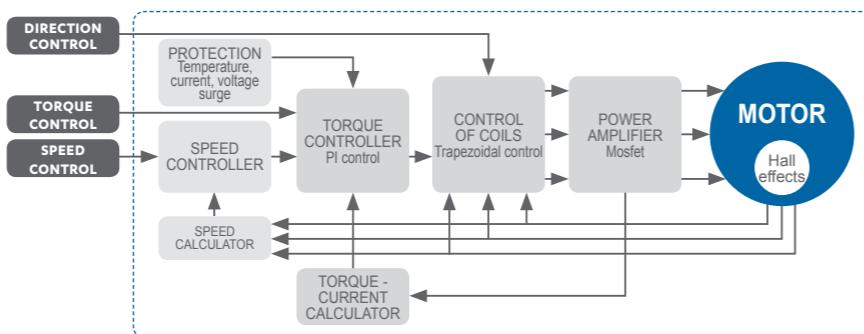

SMi21 POSITION, SPEED AND TORQUE CONTROL:

- › 6 inputs and 4 outputs, 2 of which are 10-bit analog inputs.
- › Intuitive, easy-to-use setup software - with application mode for quick start-up.
- › Very flexible thanks to the various programs on offer. All the parameters are adjustable and can be used to optimise application operation.
- › Also suitable for a 12 V, 24 V or 48 V battery power supply (voltage range between 9 and 56 volts).
- › Low power consumption when idling (1 W).

- › Rotor position controlled with 4096-point encoder and use of sinusoidal vector control.
- › Reprogramming and re-use of motors as required by changing the application program or by modifying the configuration.
- › Firmware updating made easier with the "bootloader" function.
- › Use on its own, in combination with other motors or controlled by a PLC.

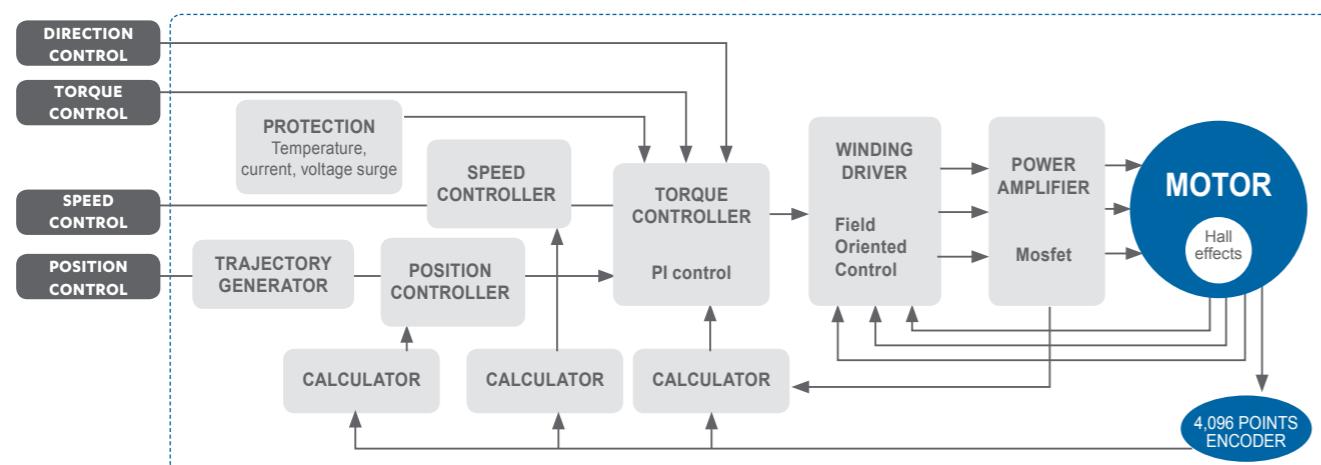

THE RANGE

		TYPE OF GEARBOX					
MOTOR TYPE		Nominal usable power at 24 VDC	Max. usable power	P52 25 Nm max.	P62 50 Nm max.	P81 120 Nm max.	RAD10 10 Nm max.
80140	TNi21	77 W	150 W	801495 TNi21	801496 TNi21	-	801410 TNi21
	SMi21	92 W	184 W	801495 SMi21	801496 SMi21	-	801410 SMi21
80180	TNi21	100 W	211 W	-	801896 TNi21	801897 TNi21	801810 TNi21
	SMi21	105 W	314 W	-	801896 SMi21	801897 SMi21	801810 SMi21
80280	TNi21	133 W	251 W	-	-	802897 TNi21	802810 TNi21
	SMi21	170 W	419 W	-	-	802897 SMi21	802810 SMi21

Nominal power ratings may vary according to the supply voltage.
Maximum power ratings are given for the maximum permissible motor voltage.
Example: the 80 280 SMi21 motor develops peak mechanical power of 419 W at 48 VDC.

OPTIONS AND ACCESSORIES

TNi21

- › Motors available with or without mechanical brake for holding at breaking current.
- › Supplied with 1 control cable and a power supply cable or with a M16 12-pin connector output including all the connections (motors 80140 and 80180).
- › Accessory, shielded cable and 12-pin M16 connector.

SMi21

- › Motors available with or without mechanical brake for holding at breaking current.
- › Requires a standard commercially-available USB/micro-USB cable and the setup software. This can be downloaded free of charge from the Crouzet website or ordered in the form of a "starter kit".

SMi21: DCmind-SOFT SIMPLIFIED PROGRAMMING



www.crouzet.com



SIMPLE AND INTUITIVE SOFTWARE


Available in several languages, with multiple possible uses, at any level of performance.

2 PROGRAMMING MODES


- › Application approach: Select an application template, then set only those parameters that relate directly to your application. These programs use preset expert programs. You can fine-tune these settings by calling up the corresponding expert program.
- › Expert approach: for automation system programs and settings covering a wide range of parameters.

DCmind-SOFT

Available on our website www.crouzet.com, or can be supplied on a USB stick in the "starter kit".

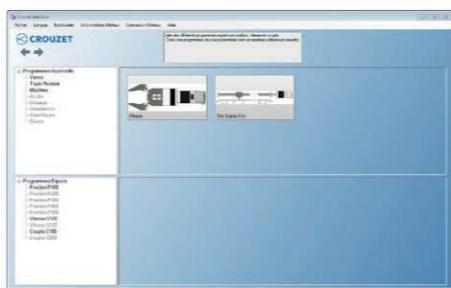

"Application" menu

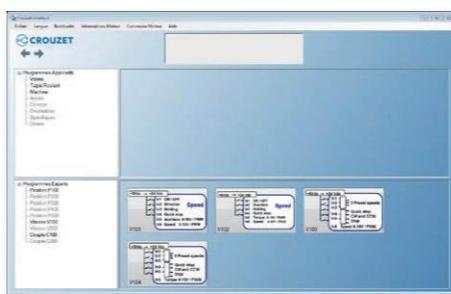

"Expert" menu



"Parameter definition" mode

CHARACTERISTICS

3 languages:
English, French, German.

Operating system:
XP Family, XP Pro, Vista, Windows 7.

Application programs:
Valve, conveyor belt, clamp, format adjustment, etc.

Expert programs:
Position, speed, torque with digital and analog inputs.

- › Numerous programs are available, offering:
 - 65,000 proportional positions which can be selected by two 0/10V inputs
 - 30 independent positions which can be selected by digital encoding
 - A variety of outputs which can be selected to suit your requirements
 - The option of setting inverted inputs, selecting 0/10V or PWM operation on the analog inputs, and even setting their operating limit stops
 - The option of modifying the control loop PID parameters for difficult applications
 - Automatic detection of the reference position for position control ("homing" function)

- › Special programs created on request, firmware updating made easier with the "Bootloader" function
- › Loading programs simplified with a USB connection
- › Other programs to come, please visit our website

SOME EXAMPLES OF APPLICATIONS

Format adjustment, automatic feed, synchronization, flow control, accurate dosage.

APPLICATIONS

Varied applications where position control, repeated movement and accuracy are key factors.



Stepper operation, detection of thrust and proportional adjustment of forces.



Performing cyclical operation, adjustment of speed and forces. Set to safety mode in the event of a fault.



Several motors combined, operation without a PLC, ease of assembly.



Operation on 12 V battery, low consumption.



S curve pilot control and operation on 12 V backup battery.



Speed pilot control

GEARBOXES FOR DCmind BRUSHLESS RANGE

4 to 120 Nm

- › Planetary and worm gearboxes
- › Shafts on ball bearings
- › Long service life
- › IP65



Part numbers

Gearboxes	Planetary Ø 52	Planetary Ø 62	Planetary Ø 81	Worm
Type	810495	810496	810497	810410
Associated motors	80140 TNi21	801495 TNi21	801496 TNi21	801410 TNi21
80140 TNi21				80180 TNi21
80180 TNi21				80280 TNi21
80280 TNi21				80140 SMi21
80140 SMi21				801897 SMi21
80180 SMi21				801495 SMi21
80280 SMi21				801896 SMi21
Gearbox characteristics				801897 SMi21
Number of stages	1	2	3	801410 SMi21
Maximum permitted torque (Nm)	4	12	25	802810 SMi21
Efficiency	0.8	0.75	0.7	801890 SMi21
Axial dynamic load (daN)	6	10	15	802897 SMi21
Radial dynamic load (daN)	20	32	45	
Operating temperature	-20 → +70°C			
Weight (kg)	0.7	0.8	1.1	
Standard reduction ratios	6.75 46 308	25 169 308	93 100 15 - 100	
Other ratios possible				
Comments				
Ø 52 planetary gearbox:	Metal gears on all stages. IP65 apart from the output shaft.			
Ø 62 planetary gearbox:	On the first stage, the planet gears are made of composite materials which improve efficiency and service life. On the other stages, the metal gears turn on needle bearings. IP65 apart from the output shaft.			
Ø 81 planetary gearbox:	All gears are metal and turn on needle bearings, resulting in excellent robustness and a very long service life. IP65 apart from the output shaft.			
Worm gearbox:	This gearbox combines a tempered steel worm and a hard bronze helical gear wheel, thus ensuring a long service life. The wheel is coated with grease, ensuring an excellent slip coefficient and good heat dissipation. O-rings and lipseals are used in combination with a compression spring to create a tight seal at the gearbox output shaft and the motor input shaft. IP65 gearbox.			

The casing is made of aluminium to maximise heat exchanges with its supporting surface on the machine. However, due to the high power that can be transmitted by this gearbox and the low efficiency inherent in large worm gearbox reduction ratios, make sure that the gearbox casing temperature does not exceed 75°C during operation. The output shaft can be placed on the right or left, or can be a double shaft (shaft output on both sides).

Made to order products, available on request




- › Special shafts
- › Other reduction ratios
- › Other fixing holes
- › Special mounting flange

Product made to order

Dimensions (mm)


Planetary gearbox Ø 52 (810495)

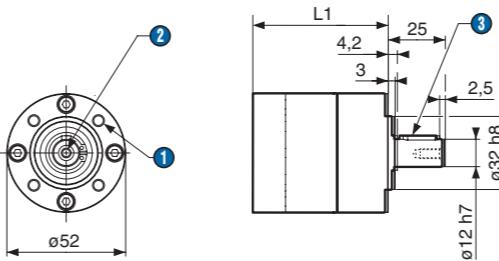

- ① 4 x M5 at 90°, depth 10 over Ø 40
- ② M4 x 10
- ③ Parallel key 4 x 4 x 16 DIN 6885 A

L1 1 stage: 55.3 ± 0.5
L1 2 stages: 69.5 ± 0.5
L1 3 stages: 83.7 ± 0.5


Planetary gearbox Ø 62 (810496)

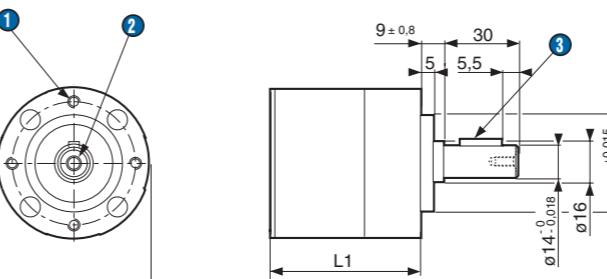

- ① 4 x M5 at 90°, depth 10 over Ø 52
- ② M5, depth 12.5
- ③ Parallel key 5 x 5 x 18 DIN 6885 A

L1 1 stage: 52.1 ± 0.7
L1 2 stages: 67.9 ± 0.7
L1 3 stages: 83.8 ± 0.7

Planetary gearbox Ø 81 (810497)

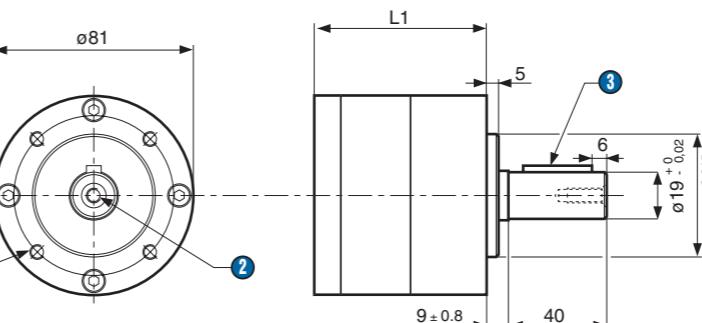


- ① 4 x M6, depth 12 over Ø 65
- ② M6 x 16
- ③ Parallel key 6 x 6 x 28 DIN 6885 A

L1 1 stage: 70.5 ± 0.6
L1 2 stages: 92.2 ± 0.6
L1 3 stages: 113.8 ± 0.6

Worm gearbox RAD10 (810410)

Version with output shaft on left

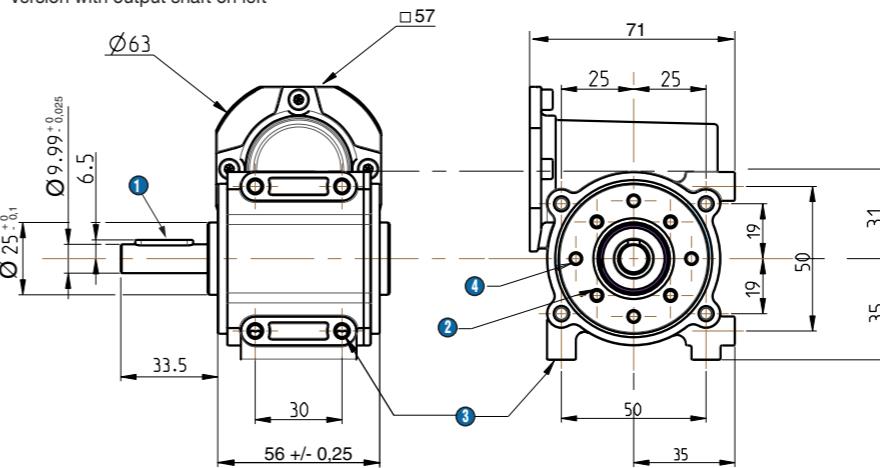


- ① Parallel key 4 x 4 x 20 DIN6885
- ② 4 x M4, depth 8 over Ø 36
- ③ 8 x M5, depth 8
- ④ 4 x Ø 3.8 depth 10 over Ø 40

The left-hand and right-hand sides of the gearbox are identical.

DCmind BRUSHLESS DIRECT MOTOR TNi21 & SMi21 CABLE OUTPUT OR WITH CONNECTOR M16

Dimensions (mm)


80140 - 80180 - 80280 - TNi21 version output cable with or without brake

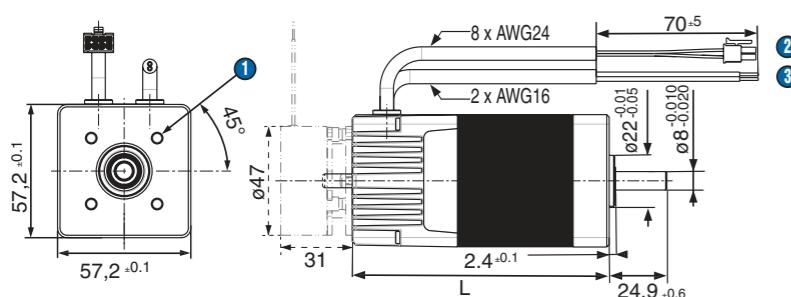

L 80140: 92 max.
L 80180: 112 max.
L 80280: 112 max.

- ① 4 x M5 at 90°, depth 6 over Ø 40
- ② Command cable 8 x AWG24 / 500 mm
- ③ Power cable 2 x AWG16 / 500 mm


80140 - 80180 - TNi21 version connector M16 - 12 pins with or without brake

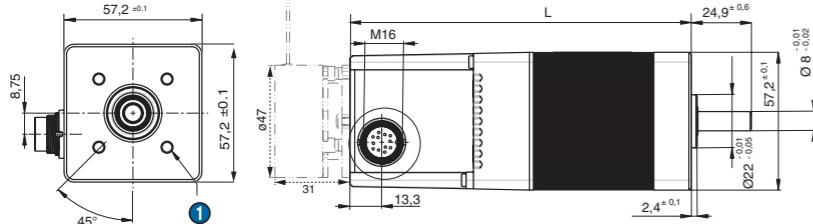

L 80140: 123 max.
L 80180: 143 max.

- ① 4 x M5 at 90°, depth 6 over Ø 40

80140 - 80180 - 80280 - SMi21 with or without brake

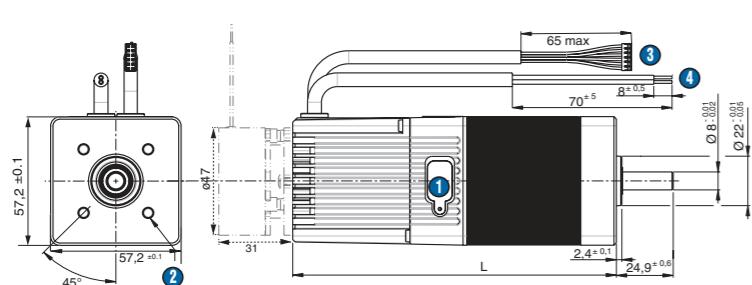


L 80140: 123 max.
L 80180: 143 max.
L 80280: 143 max.

- ① USB connection type B
- ② 4 x M5 at 90°, depth 6 over Ø 40
- ③ Command cable 10 x AWG24 / 500 mm
- ④ Power cable 2 x AWG16 / 500 mm

DCmind BRUSHLESS GEARED MOTOR TNi21 CABLE OUTPUT

Dimensions (mm)


801495 - TNi21 + P52 with or without brake

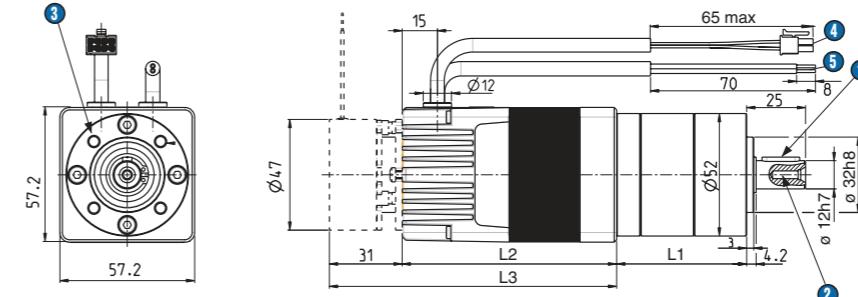

L1 1 stage: 55.3 ±0.5
L1 2 stages: 69.5 ±0.5
L1 3 stages: 83.7 ±0.5
L2 80140: 92 max.
L3 80140: 123 max.

- ① Parallel key 4 x 4 x 16 DIN 6885 A
- ② M4 x 10
- ③ 4 x M5 at 90°, depth 10 over Ø 40
- ④ Command cable 8 x AWG24 / 500 mm
- ⑤ Power cable 2 x AWG16 / 500 mm


801496 - 801896 - TNi21 + P62 with or without brake

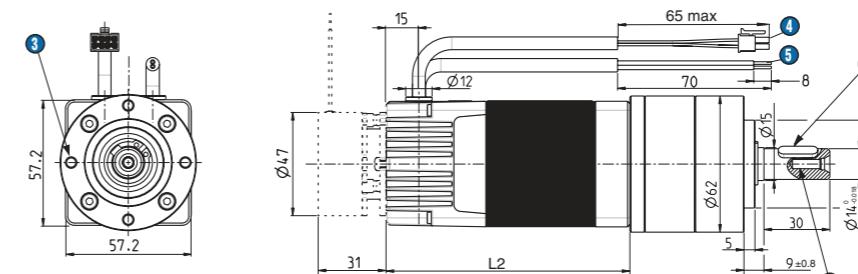

L1 1 stage: 52.1 ±0.7
L1 2 stages: 67.9 ±0.7
L1 3 stages: 83.8 ±0.7
L2 80140: 92 max.
L2 80180: 112 max.
L3 80140: 123 max.
L3 80180: 143 max.

- ① Parallel key 5 x 5 x 18 DIN 6885 A
- ② M5 x 12
- ③ 4 x M5 at 90°, depth 10 over Ø 52
- ④ Command cable 8 x AWG24 / 500 mm
- ⑤ Power cable 2 x AWG16 / 500 mm


801897 - 802897 - TNi21 + P81 with or without brake

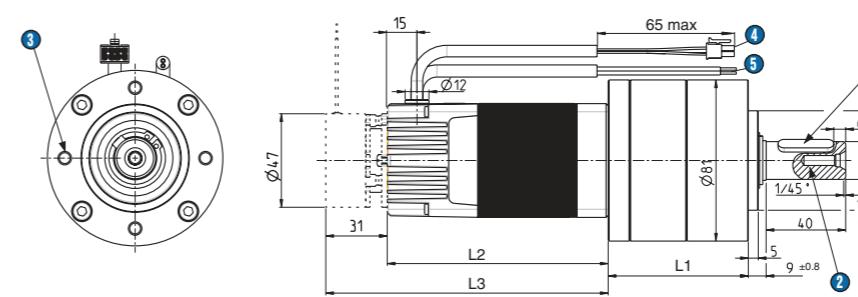

L1 1 stage: 70.5 ±0.6
L1 2 stages: 92.2 ±0.6
L1 3 stages: 113.8 ±0.6
L2 80180-80280: 112 max.
L3 80180-80280: 143 max.

- ① Parallel key 6 x 6 x 28 DIN 6885 A
- ② M6 x 16
- ③ 4 x M6 at 90°, depth 12 over Ø 65
- ④ Command cable 8 x AWG24 / 500 mm
- ⑤ Power cable 2 x AWG16 / 500 mm

801410 - 801810 - 802810 - TNi21 + RAD10 with or without brake

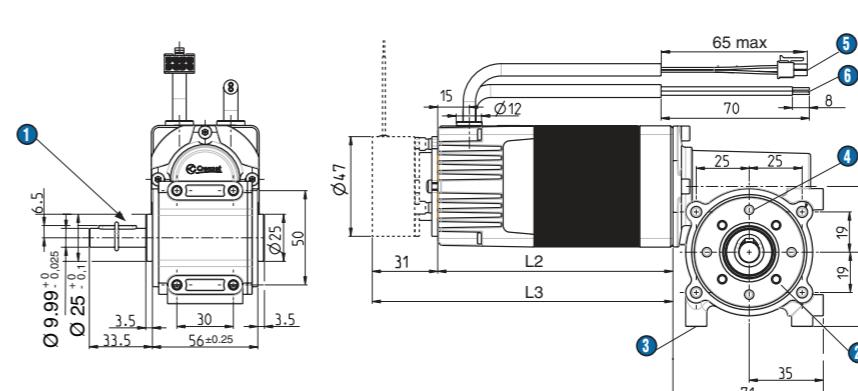


L2 80140: 92 max.
L2 80180-80280: 112 max.
L3 80140: 123 max.
L3 80180-80280: 143 max.

- ① Parallel key 4 x 4 x 20 DIN 6885 A
- ② 4 x M4, depth 8 over Ø 36
- ③ 8 x M5 depth 8
- ④ 4 x Ø 3.8, depth 10 over Ø 40
- ⑤ Command cable 8 x AWG24 / 500 mm
- ⑥ Power cable 2 x AWG16 / 500 mm

DCmind BRUSHLESS GEARED MOTOR TNi21 WITH CONNECTOR M16

Dimensions (mm)


801495 - TNi21 + P52 M16 connector with or without brake

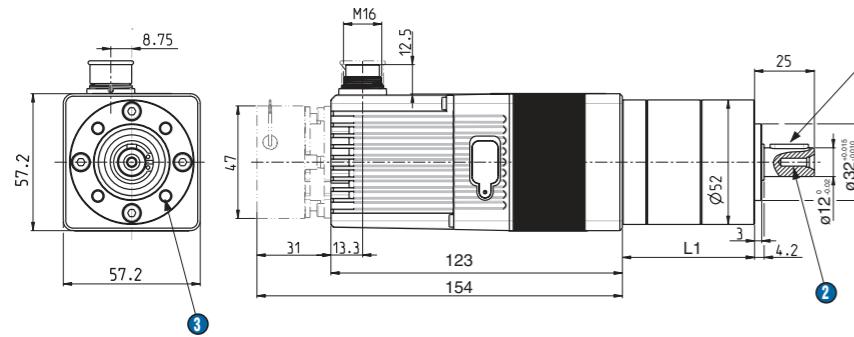

L1 1 stage: 55.3 ±0.5
L1 2 stages: 69.5 ±0.5
L1 3 stages: 83.7 ±0.5

- ① Parallel key 4 x 4 x 16 DIN 6885 A
- ② M4 x 10
- ③ 4 x M5 at 90°, depth 10 over Ø 40

801496 - 801896 - TNi21 + P62 M16 connector with or without brake

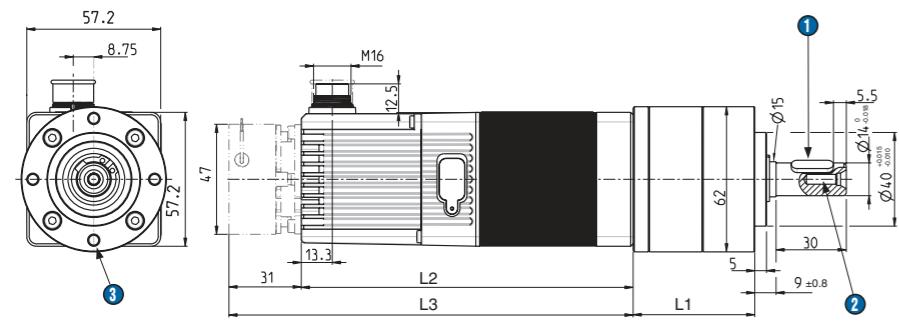


L1 1 stage: 52.1 ±0.7
L1 2 stages: 67.9 ±0.7
L1 3 stages: 83.8 ±0.7

L2 80140: 123 max.
L2 80180: 143 max.
L3 80140: 154 max.
L3 80180: 174 max.

- ① Parallel key 5 x 5 x 18 DIN 6885 A
- ② M5 x 12
- ③ 4 x M5 at 90°, depth 10 over Ø 52

801897 - TNi21 + P81 M16 connector with or without brake

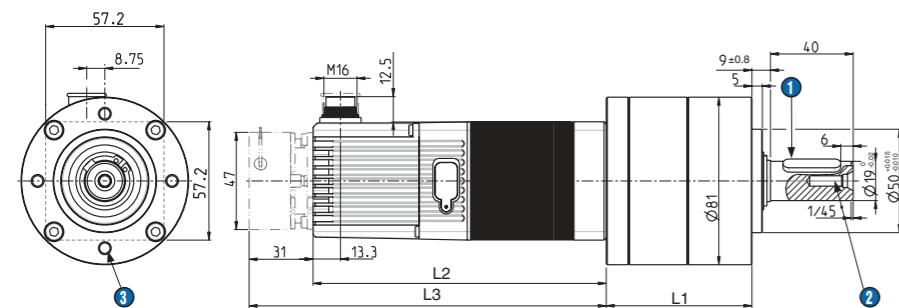


L1 1 stage: 70.5 ±0.6
L1 2 stages: 92.2 ±0.6
L1 3 stages: 113.8 ±0.6

L2 80180: 143 max.
L3 80180: 174 max.

- ① Parallel key 6 x 6 x 28 DIN 6885 A
- ② M6 x 16
- ③ 4 x M6, depth 12 over Ø 65

801410 - 801810 - TNi21 + RAD10 M16 connector with or without brake

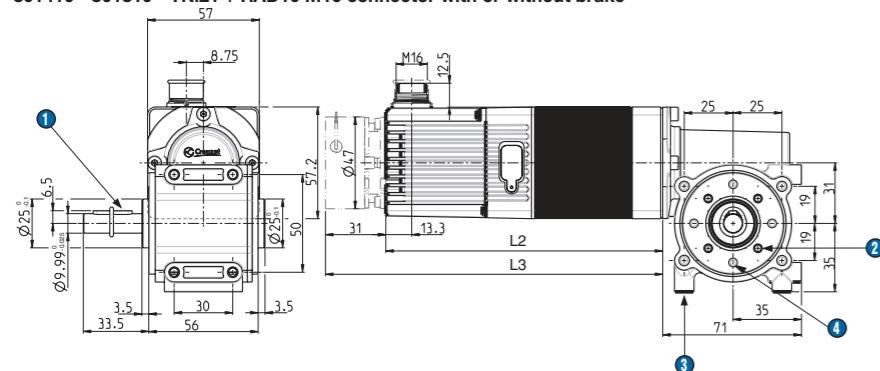


L2 80140: 123 max.
L2 80180-80280: 143 max.
L3 80140: 154 max.
L3 80180-80280: 174 max.

- ① Parallel key 4 x 4 x 20 DIN 6885 A
- ② 4 x M4, depth 8 over Ø 36
- ③ 8 x M5, depth 8
- ④ 4 x 3.8, depth 10 over Ø 40

DCmind BRUSHLESS GEARED MOTOR SMi21 CABLE OUTPUT

Dimensions (mm)


801495 - SMi21 + P52 with or without brake

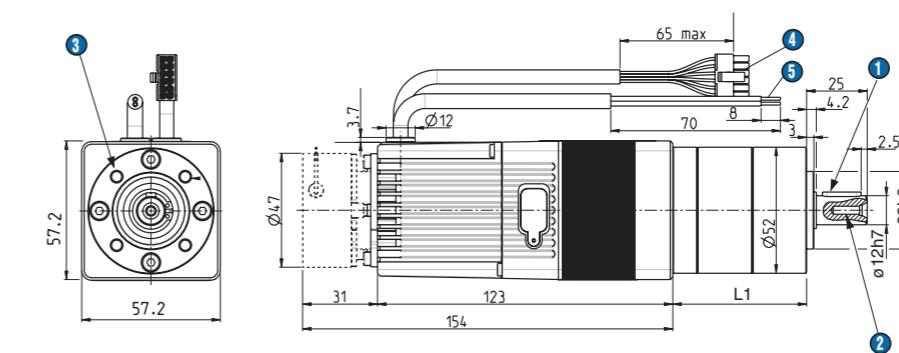

L1 1 stage: 55.3 ±0.5
L1 2 stages: 69.5 ±0.5
L1 3 stages: 83.7 ±0.5

- ① Parallel key 4 x 4 x 16 DIN 6885 A
- ② M4 x 10
- ③ 4 x M5 at 90°, depth 10 over Ø 40
- ④ Command cable 12 x AWG26 / 500 mm
- ⑤ Power cable 2 x AWG16 / 500 mm

801496 - 801896 - SMi21 + P62 with or without brake

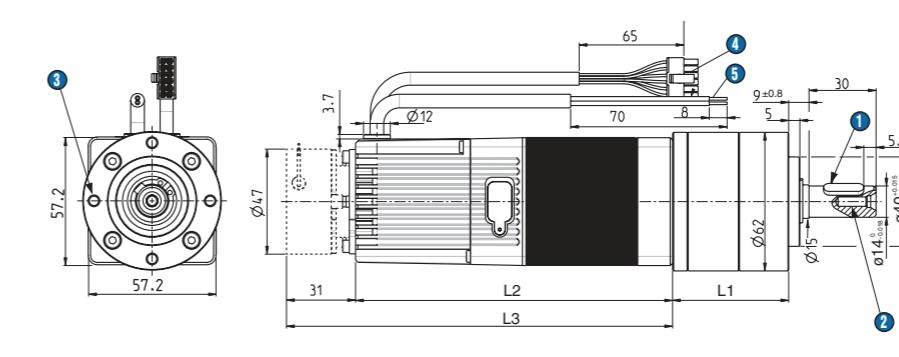


L1 1 stage: 52.1 ±0.7
L1 2 stages: 67.9 ±0.7
L1 3 stages: 83.8 ±0.7

L2 80140: 123 max.
L2 80180: 143 max.
L3 80140: 154 max.
L3 80180: 174 max.

- ① Parallel key 5 x 5 x 18 DIN 6885 A
- ② M5 x 12
- ③ 4 x M5 at 90°, depth 10 over Ø 52
- ④ Command cable 12 x AWG26 / 500 mm
- ⑤ Power cable 2 x AWG16 / 500 mm

801897 - 802897 - SMi21 + P81 with or without brake

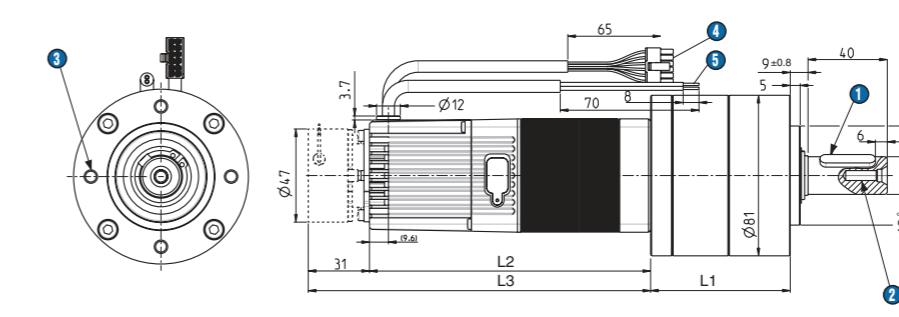


L1 1 stage: 70.5 ±0.6
L1 2 stages: 92.2 ±0.6
L1 3 stages: 113.8 ±0.6

L2 80180 - 80280: 143 max.
L3 80180 - 80280: 174 max.

- ① Parallel key 6 x 6 x 28 DIN 6885 A
- ② M6 x 16
- ③ 4 x M6 at 90°, depth 12 over Ø 65
- ④ Command cable 12 x AWG26 / 500 mm
- ⑤ Power cable 2 x AWG16 / 500 mm

801410 - 801810 - 802810 - SMi21 + RAD10 with or without brake

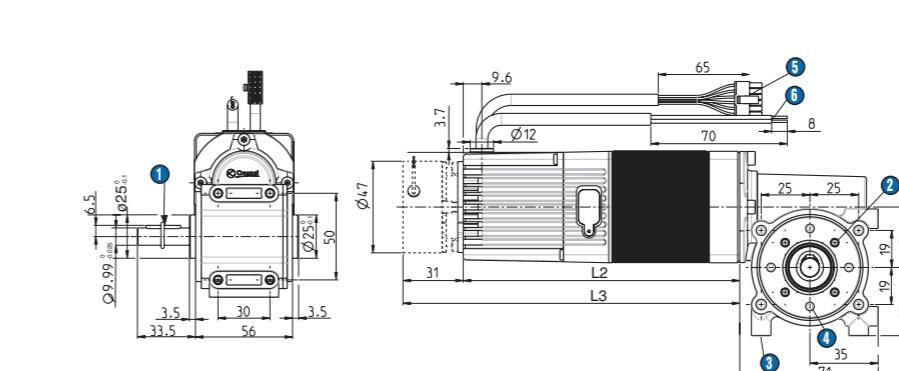

L2 80140: 123 max.
L2 80180 - 80280: 143 max.
L3 80140: 154 max.
L3 80180 - 80280: 174 max.

- ① Parallel key 4 x 4 x 20 DIN 6885 A
- ② 4 x M4, depth 8 over Ø 36
- ③ 8 x M5, depth 8
- ④ 4 x Ø 3.8, depth 10 over Ø 40
- ⑤ Command cable 12 x AWG26 / 500 mm
- ⑥ Power cable 2 x AWG16 / 500 mm

AMERICAS
CANADA

Tel.: +1 (855) 929-5465
 americas.custserv@crouzet.com

MEXICO

Tel.: +1 (855) 929-5465
 americas.custserv@crouzet.com

USA

+1 (855) 929-5465
 americas.custserv@crouzet.com

COUNTRIES NOT LISTED

+1 (855) 929-5465
 americas.custserv@crouzet.com

EUROPE / MIDDLE EAST / AFRICA
BELGIUM

Tel.: +32 (0) 2 620 06 05
 Fax: +32 (0) 2 461 00 23
 klantenservice@crouzet.com

FRANCE

Tel.: +33 (0) 475 802 101
 Fax: +33 (0) 475 828 900
 relationclient@crouzet.com

GERMANY / AUSTRIA

Tel.: +49 (0) 2103/9385930
 Fax: +49 (0) 2103/980-222
 kundenservice@crouzet.com

ITALY

Tel.: +39 (02) 38 594 099
 Fax: +39 (02) 82 952 104
 assistenzaclienti@crouzet.com

SPAIN / PORTUGAL

Tel.: +34 (91) 215 80 95
 Fax: +34 (93) 2 20 02 05
 atencionalcliente@crouzet.com

SWITZERLAND

Tel.: +41 (0) 225 67 57 90
 Fax: +41 (0) 565 88 02 75
 kundenservice@crouzet.com

THE NETHERLANDS

Tel.: +31 (0) 20-654 52 20
 klantenservice@crouzet.com

UNITED KINGDOM

Tel.: +44 (0) 2076 600 025
 customer.relation@crouzet.com

COUNTRIES NOT LISTED

Tel.: +33 (0) 475 802 102
 Fax: +33 (0) 475 828 900
 customer.relation@crouzet.com

ASIA / PACIFIC
CHINA

Tel.: +86 (21) 8025 7166
 Fax: +86 (21) 6107 1771
 china@crouzet.com

INDIA

Tel.: +91 (80) 4113 2204/05
 Fax: +91 (80) 4113 2206
 india@crouzet.com

SOUTH KOREA

Tel.: +82 (2) 2679 8312
 Fax: +82 (2) 2679 9888
 korea@crouzet.com

EAST ASIA PACIFIC

Tel.: +86 (21) 8025 7177
 Fax: +86 (21) 6107 1771
 eap@crouzet.com

Warning:

The product information contained in this catalogue is given purely as information and does not constitute a representation, warranty or any form of contractual commitment. Crouzet Automatismes SAS and its subsidiaries reserve the right to modify their products without notice. It is imperative that we should be consulted over any particular use or application of our products and it is the responsibility of the buyer to establish, particularly through all the appropriate tests, that the product is suitable for the use or application. Under no circumstances will our warranty apply, nor shall we be held responsible for any application (such as any modification, addition, deletion, use in conjunction with other electrical or electronic components, circuits or assemblies, or any other unsuitable material or substance) which has not been expressly agreed by us prior to the sale of our products.