

## Designated client product

This product will be discontinued its production in the near term.  
And it is provided for customers currently in use only, with a time limit.  
It can not be available for your new project. Please select other new or existing products.

For more information, please contact our sales office in your region.

New Japan Radio Co.,Ltd.


[www.njr.com](http://www.njr.com)

## DUAL OPERATIONAL AMPLIFIER

### ■ GENERAL DESCRIPTION

The NJM4562 integrated circuit is a high-gain, wide-bandwidth, low noise, dual operational amplifier capable of driving 20V peak-to-peak into 600Ω loads. The NJM4562 is frequency compensated for closed loop gains greater than 10. The NJM4562 combines many of the features of the popular NJM4558 as well as providing the capability of wider bandwidth, and higher slew rate and less noise make the NJM4562 ideal for audio preamplifiers, active filters, telecommunications, and many instrumentation applications. The availability of the NJM4562 in the surface mounted micro package allows the NJM4562 to be used in critical applications requiring very high packing densities.

### ■ PACKAGE OUTLINE



NJM4562D




NJM4562M

### ■ FEATURES

- Operating Voltage ( ±4V~±18V )
- Low Input Noise Voltage ( 0.6μVrms typ. )
- Package Outline DIP8,DMP8
- Bipolar Technology


### ■ PIN CONFIGURATION



NJM4562D  
NJM4562M

- PIN FUNCTION**
- 1.A OUTPUT
  - 2.A -INPUT
  - 3.A +INPUT
  - 4.V<sup>-</sup>
  - 5.B +INPUT
  - 6.B -INPUT
  - 7.B OUTPUT
  - 8.V<sup>+</sup>

### ■ EQUIVALENT CIRCUIT ( 1/2 Shown )

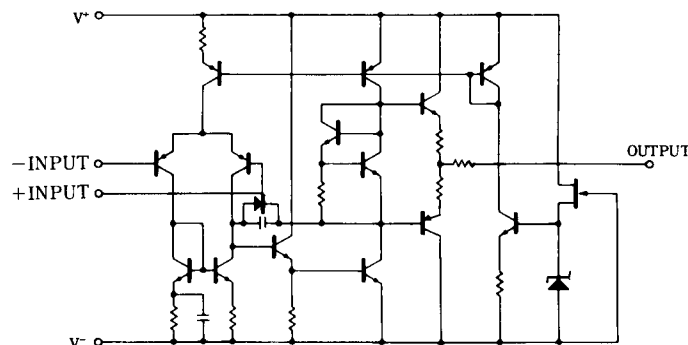

# NJM4562

## ■ ABSOLUTE MAXIMUM RATINGS

( Ta=25°C )

| PARAMETER                   | SYMBOL      | RATINGS                      | UNIT |
|-----------------------------|-------------|------------------------------|------|
| Supply Voltage              | $V^+ / V^-$ | ± 18                         | V    |
| Differential Input Voltage  | $V_{ID}$    | ± 30                         | V    |
| Input Voltage               | $V_{IC}$    | ± 15 ( note )                | V    |
| Power Dissipation           | $P_D$       | ( DIP8 ) 500<br>( DMP8 ) 300 | mW   |
| Operating Temperature Range | $T_{opr}$   | -40~+85                      | °C   |
| Storage Temperature Range   | $T_{stg}$   | -40~+125                     | °C   |

( note ) For supply voltage less than ±15V, the absolute maximum input voltage is equal to the supply voltage.

## ■ ELECTRICAL CHARACTERISTICS


( Ta=25°C,  $V^+ / V^- = \pm 15V$  )

| PARAMETER                       | SYMBOL    | TEST CONDITION                     | MIN. | TYP. | MAX. | UNIT  |
|---------------------------------|-----------|------------------------------------|------|------|------|-------|
| Input Offset Voltage            | $V_{IO}$  | $R_S \leq 10k\Omega$               | -    | 0.5  | 6    | mV    |
| Input Offset Current            | $I_{IO}$  |                                    | -    | 5    | 200  | nA    |
| Input Bias Current              | $I_B$     |                                    | -    | 100  | 500  | nA    |
| Input Resistance                | $R_{IN}$  |                                    | 0.3  | 5    | -    | MΩ    |
| Large Signal Voltage Gain       | $A_V$     | $R_L \geq 2k\Omega, V_O = \pm 10V$ | 86   | 110  | -    | dB    |
| Maximum Output Voltage Swing 1  | $V_{OM1}$ | $R_L \geq 10k\Omega$               | ± 12 | ± 14 | -    | V     |
| Maximum Output Voltage Swing 2  | $V_{OM2}$ | $R_L \geq 2k\Omega$                | ± 10 | ± 13 | -    | V     |
| Input Common Mode Voltage Range | $V_{ICM}$ |                                    | ± 12 | ± 14 | -    | V     |
| Common Mode Rejection Ratio     | CMR       | $R_S \leq 10k\Omega$               | 70   | 90   | -    | dB    |
| Supply Voltage Rejection Ratio  | SVR       | $R_S \leq 10k\Omega$               | 76.5 | 90   | -    | dB    |
| Operating Current               | $I_{CC}$  |                                    | -    | 3.5  | 5.7  | mA    |
| Equivalent Input Noise Voltage  | $V_{NI}$  | $R_S = 300\Omega, JISA$            | -    | 0.6  | -    | μVrms |

## ■ TYPICAL CHARACTERISTICS


**Open Loop Voltage Gain vs. Frequency**

( $V^+/V^- = \pm 15V$ ,  $R_L = 2k\Omega$ ,  $T_a = 25^\circ C$ )

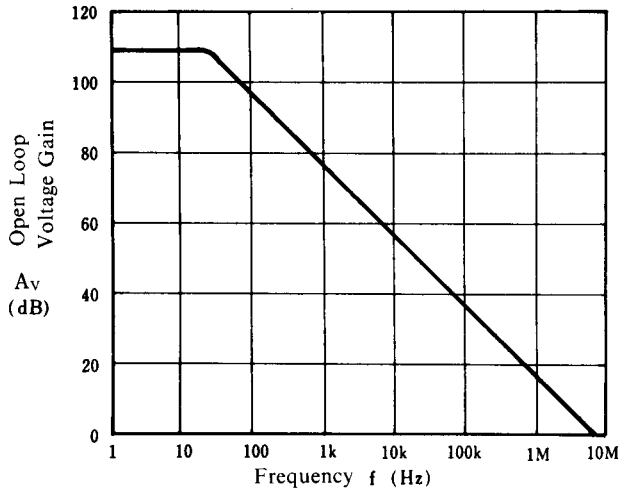


**Total Harmonic Distortion vs. Output Voltage**

( $V^+/V^- = \pm 15V$ ,  $R_L = 2k\Omega$ ,  $T_a = 25^\circ C$ )

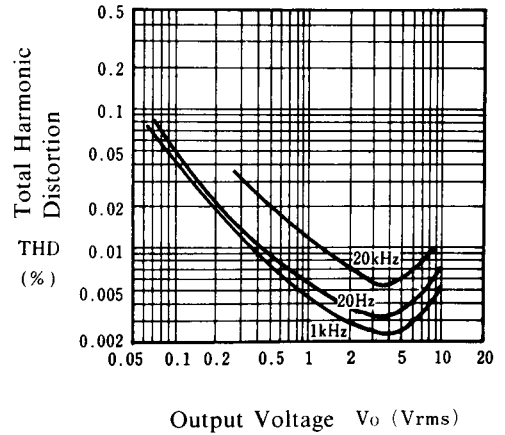


**Maximum Output Voltage Swing vs. Load Resistance**

( $V^+/V^- = \pm 15V$ ,  $T_a = 25^\circ C$ )

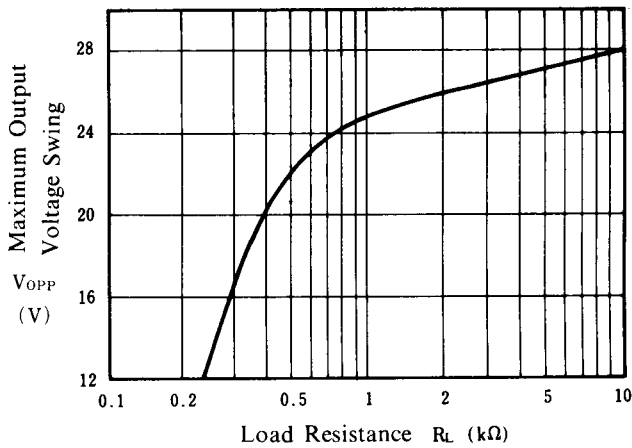


**Equivalent Input Noise Voltage vs. Rs**

( $V^+/V^- = \pm 15V$ ,  $T_a = 25^\circ C$ )

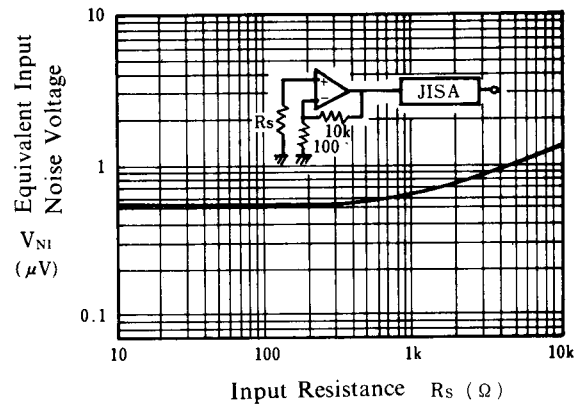


**Operating Current vs. Temperature**

( $V^+/V^- = \pm 15V$ )

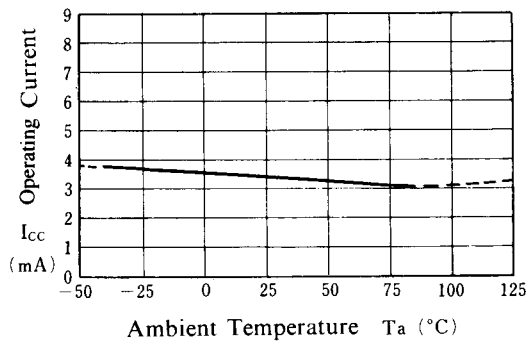


**Maximum Output Voltage Swing vs. Temperature**

( $V^+/V^- = \pm 15V$ )

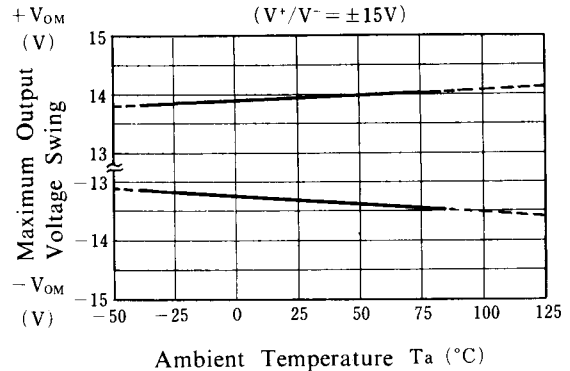


## ■ TYPICAL CHARACTERISTICS


**Input Offset Voltage vs. Temperature**

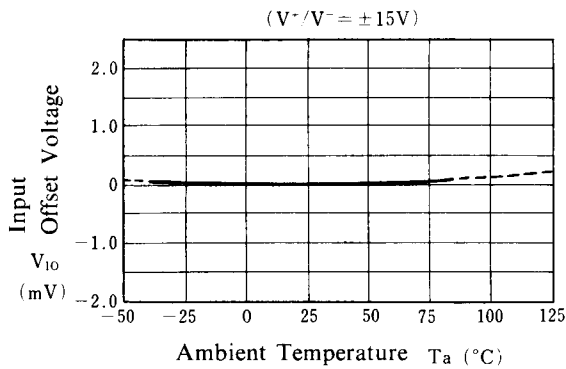


**Input Bias Current vs. Temperature**

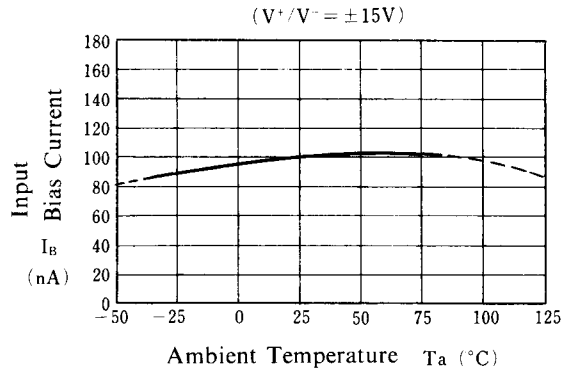


**Maximum Output Voltage Swing vs. Operating Voltage**

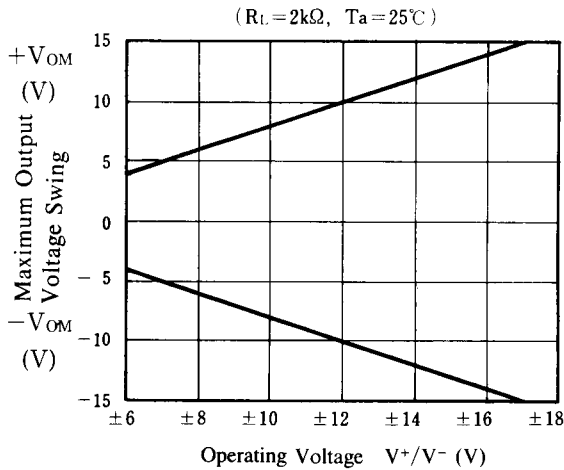

**Operating Current vs. Operating Voltage**

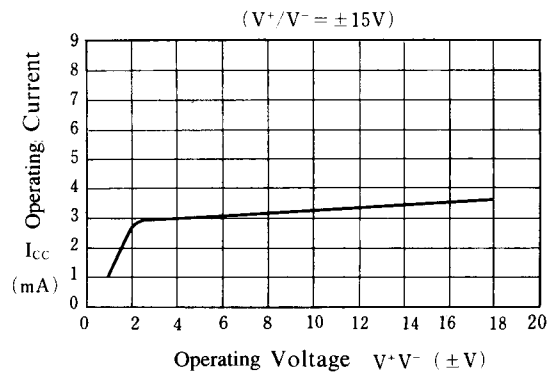

**Maximum Output Voltage vs. Frequency**

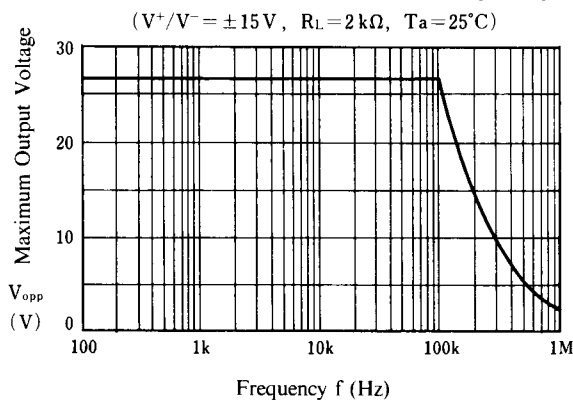

**[CAUTION]**

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.