


5X7 Dot Character VFD Module

CU40025SCPB-W6J

- ❑ 2 X 40 Characters 5mm High
- ❑ LCD Compatible Design
- ❑ Wide Operating Temp -40°C to +85°C
- ❑ Single 5V Supply with Power Save Mode
- ❑ High Brightness Blue Green Display
- ❑ Selectable 4/8 bit M68/i80 Interface
- ❑ ASCII + Extended Character Font
- ❑ 8 User Definable Character RAM
- ❑ 4 Level Brightness Control Function

The module includes the Vacuum Fluorescent Display glass, driver and micro-controller ICs with refresh RAM, character generator and interface logic.

The high speed 8 bit parallel interface is 5V CMOS compatible suitable for connection to a host CPU bus which can be set to M68 or i80 series interface by a solder link on the module. Brightness control and power save functions are provided. Please call for a full data sheet.

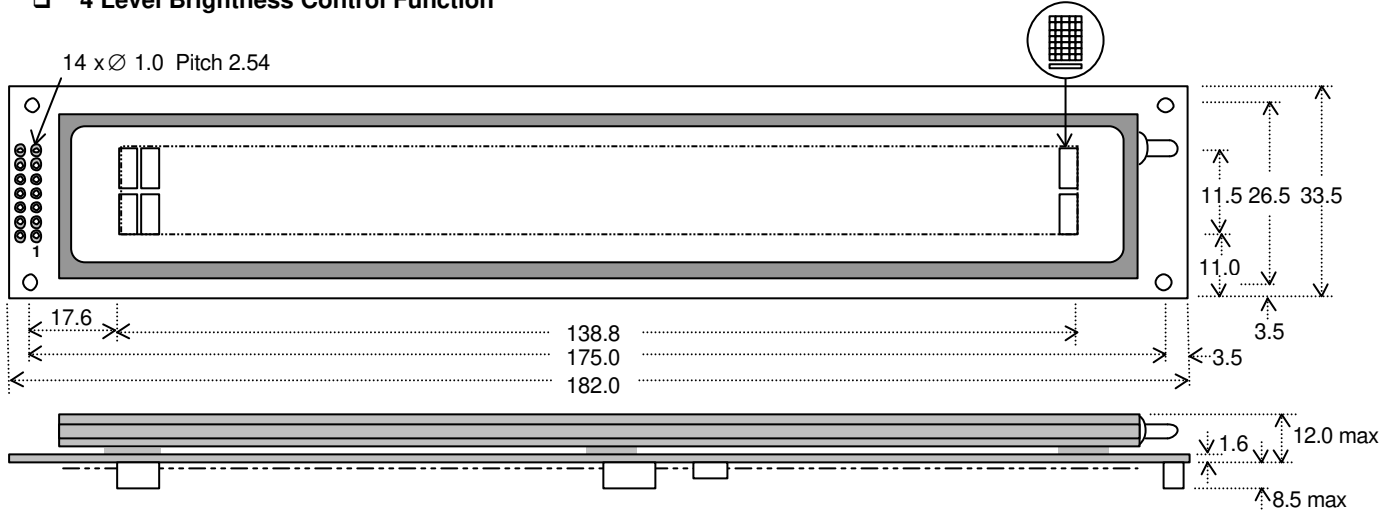

Dimensions in mm & subject to tolerances. Mounting holes 3.5mm dia.

ELECTRICAL SPECIFICATION

Parameter	Symbol	Value	Condition
Power Supply Voltage	V _{CC}	5.0VDC +/- 5%	GND=0V
Power Supply Current	I _{CC}	330mADC typ.	V _{CC} =5V
Logic High Input (DB0-DB7)	V _{IH1}	V _{SS} +2.2VDC min.	V _{CC} =5V
Logic Low Input (DB0-DB7)	V _{IL1}	V _{SS} +0.6VDC max	V _{CC} =5V
Logic High Input (RS,R/W,E)	V _{IH2}	0.7 V _{CC} min.	V _{CC} =5V
Logic Low Input (RS,R/W,E)	V _{IL2}	0.3 V _{CC} max.	V _{CC} =5V
Logic High Output	V _{OH}	V _{CC} -0.5VDC min.	I _{OH} = -1.6mA
Logic Low Output	V _{OL}	V _{SS} +0.4VDC max	I _{OL} = 1.6mA

The power on rise time should be less than 50ms. The inrush current at power on can be 2 x I_{CC}. The I_{CC} current is 10mA maximum while in power save mode.

OPTICAL and ENVIRONMENTAL SPECIFICATIONS

Parameter	Value
Character Size/Pitch (XxY mm)	2.3 x 4.7/3.5 x 6.1
Dot Size/Pitch (XxY mm)	0.38 x 0.5/0.48 x 0.7
Luminance	700 cd/m ² (204 fL) Typ.
Colour of Illumination	Blue-Green (Filter for more colours)
Operating Temperature	-40°C to +85°C
Storage Temperature	-50°C to +85°C
Operating Humidity (non condensing)	20 to 80% RH @ 25°C

SOFTWARE COMMANDS

Instruction	R/W	RS	D0-D7
Clear Display	L	L	01H
Cursor Return Home	L	L	02H-03H
Entry Mode Set	L	L	04H-07H
Display ON/OFF	L	L	08H-0FH
Cursor/Display Shift	L	L	10H-1FH
Function Set	L	L	20H-3FH
Brightness Set	L	H	00H-03H
Set CG RAM Addr.	L	L	40H-7FH
Set DD RAM Addr.	L	L	80H-E7H
Read BUSY/Addr.	H	L	00H-FFH
Write Data to RAM	L	H	00H-FFH
Read Data from RAM	H	H	00H-FFH

PIN CONNECTIONS

Pin	Sig	Pin	Sig
1	GND	2	V _{CC}
3	(FNC)	4	RS
5	R/W #	6	E #
7	D0	8	D1
9	D2	10	D3
11	D4	12	D5
13	D6	14	D7

TIMING PARAMETERS (min)

(E)nable Cycle Time	666ns
(E)nable Pulse Width	300ns
Hold after (E)nable	10ns

CHARACTER FONT

H _{EX}	00	10	20	30	40	50	60	70	80	90	A0	B0	C0	D0	E0	F0
00		0	0	P	\	P	A	F	-	9	E	0	P			
01		!	1	A	0	a	q	A	a	7	7	4	3	9		
02		"	2	B	R	b	r	3	E	r	4	Y	X	E	0	
03		#	3	C	S	c	s	3	A	R	J	7	T	E	S	*
04		\$	4	D	T	d	t	a	@	.	I	T	P	H	Q	
05		%	5	E	U	e	u	E	O	.	7	7	1	6	U	
06		&	6	F	V	f	v	0	+	7	h	2	3	P	Σ	
07		'	7	G	W	g	w	0	+	7	7	7	7	9	π	
08		(8	H	X	h	x	0	1	4	7	3	7	r	X	
09)	9	I	Y	i	y	0	6	7	7	7	7	7	7	
0A		*	:	J	Z	j	z	U	d	z	U	n	7	7	7	
0B		+	;	K	k	U	Δ	*	7	7	7	7	7	7	7	
0C		,	<	L	#	l	l	2	7	7	7	7	7	7	7	
0D		-	=	M	m	>	7	7	7	7	7	7	7	7	7	
0E		.	>	N	^	n	7	7	7	7	7	7	7	7	7	
0F		+	/	?	0	_	o	+	Σ	7	7	7	7	7	7	

JUMPER LINKS

Interface M68/i80
When jumper link JP2 is soldered, these inputs change to i80 series CPU control lines.
Pin 5 = /WR Pin 6 = /RD

Pin 3 (Fnc) Input

This is normally open circuit. If pads JP4.1 and JP4.2 are linked. Pin 3 = /Reset.

CONTACT

Noritake Sales Office Tel Nos
Nagoya Japan: +81 (0)52-561-9867
Canada: +1-416-291-2946
Chicago USA: +1-847-439-9020
Munche (D): +49 (0)89-3214-290
Itron UK: +44 (0)1493 601144
Rest Europe: +49 (0)61-0520-9220
www.noritake-itron.com

Subject to change without notice.
IUK Doc Ref: 03445 Iss:1 11 July 2001