

## DIN-Signal harbus64,C,F,PL1-5000 reel



Image is for illustration purposes only. Please refer to product description.

Part number	02 05 000 1511
Specification	DIN-Signal harbus64,C,F,PL1-5000 reel
HARTING eCatalogue	<a href="https://b2b.harting.com/02050001511">https://b2b.harting.com/02050001511</a>

### Identification

Category	Contacts
Series	har-bus <sup>®</sup> 64
Type of contact	Crimp contact
Features	lead-free

### Version

Gender	Female contact
Manufacturing process	Stamped contacts
Pack contents	5000 bandoliered contacts

### Technical characteristics

Conductor cross-section	0.09 ... 0.5 mm <sup>2</sup>
Conductor cross-section	AWG 28 ... AWG 20
Wire outer diameter	0.7 ... 1.5 mm
Operating current	≤1.5 A
Contact resistance	≤20 mΩ
Stripping length	3.5 ... 4 mm
Performance level	1 acc. to IEC 61076-4-113
Mating cycles	≥500

### Material properties

Material (contacts)	Copper alloy
---------------------	--------------



**Pushing Performance**  
 Since 1945

## Material properties

Surface (contacts)	Noble metal over Ni Mating side Ni Termination side
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Not contained
California Proposition 65 substances	Yes
California Proposition 65 substances	Nickel

## Specifications and approvals


Specifications	IEC 61076-4-113 (complementary)
----------------	---------------------------------

## Commercial data


Packaging size	1
Net weight	1,200 g
Country of origin	Germany
European customs tariff number	85366990
GTIN	5713140000360
eCl@ss	27440204 Contact for industrial connectors

## Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.  
 Measuring and testing techniques acc. to IEC 60512-5-2

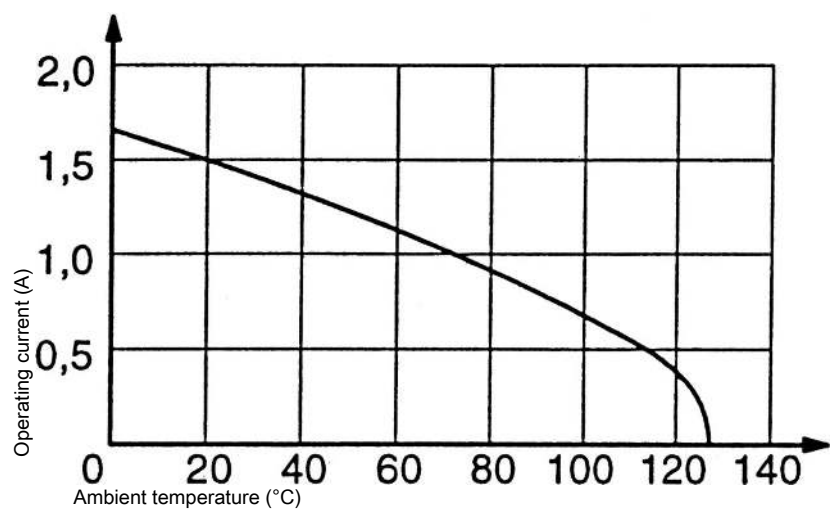

### Installation of crimp contacts

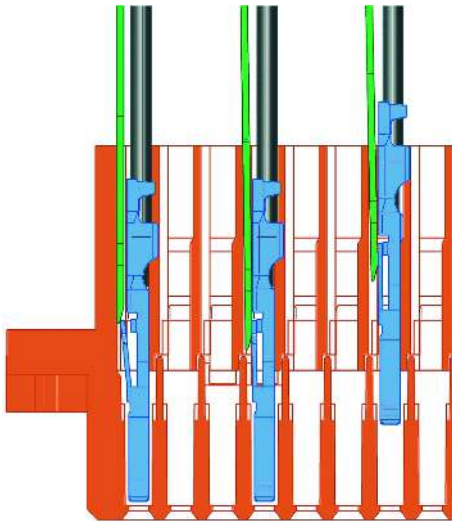

#### Fitting the crimp contacts:

After crimping the wires onto the contacts with the help of a crimping tool or an automatic crimping machine the contacts should be correctly oriented and inserted into the cavities of the connector moulding in the required configuration. They snap into position and are firmly held in place. A light pull on the wire assures the correct tensile strength of the contact. When using stranded wires with a gauge below  $0.37 \text{ mm}^2$  an insertion tool is necessary. Insertion tool part number: 09 99 000 0100

Insertion tool part number: 09 99 000 0100

#### Removing the crimp contacts:

The removal tool is inserted into a slot on the side of the respective crimp cavity. This action compresses the contact retaining spring therefore the contact can then be easily withdrawn using a light pull on the wire. This action will cause no damage to the contact / wire which can be repositioned / refitted as necessary. The drawing demonstrates the crimp removal procedure (max. 5x).

Removal tool part number: 09 99 000 0101