


# BD675A/677A/679A/681

# **Medium Power Linear and Switching Applications**

- Medium Power Darlington TR
- Complement to BD676A, BD678A, BD680A and BD682 respectively



# **NPN Epitaxial Silicon Transistor**

## **Absolute Maximum Ratings** T<sub>C</sub>=25°C unless otherwise noted

Symbol	Pa	rameter	Value	Units
V <sub>CBO</sub>	Collector-Base Voltage	: BD675A	45	V
		: BD677A	60	V
		: BD679A	80	V
		: BD681	100	V
$V_{CEO}$	Collector-Emitter Voltage	: BD675A	45	V
020		: BD677A	60	V
		: BD679A	80	V
		: BD681	100	V
V <sub>EBO</sub>	Emitter-Base Voltage		5	V
I <sub>C</sub>	Collector Current (DC)		4	Α
I <sub>CP</sub>	*Collector Current (Pulse)		6	Α
I <sub>B</sub>	Base Current		100	mA
P <sub>C</sub>	Collector Dissipation (T <sub>C</sub> =25°C	;)	40	W
T <sub>J</sub>	Junction Temperature		150	°C
T <sub>STG</sub>	Storage Temperature		- 65 ~ 150	°C

# **Electrical Characteristics** $T_C=25$ °C unless otherwise noted

Symbol	Param	eter	Test Condition	Min.	Тур.	Max.	Units
V <sub>CEO</sub> (sus)	*Collector-Emitter Sustain	ing Voltage : BD675A : BD677A : BD679A : BD681	I <sub>C</sub> = 50mA, I <sub>B</sub> = 0	45 60 80 100			V V V
I <sub>CBO</sub>	Collector-Base Voltage	: BD675A : BD677A : BD679A : BD681	$\begin{aligned} &V_{CB} = 45 \text{V},  I_E = 0 \\ &V_{CB} = 60 \text{V},  I_E = 0 \\ &V_{CB} = 80 \text{V},  I_E = 0 \\ &V_{CB} = 100 \text{V},  V_{BE} = 0 \end{aligned}$			200 200 200 200	μΑ μΑ μΑ μΑ
I <sub>CEO</sub>	Collector Cut-off Current	: BD675A : BD677A : BD679A : BD681	$V_{CE} = 45V, V_{BE} = 0$ $V_{CE} = 60V, V_{BE} = 0$ $V_{CE} = 80V, V_{BE} = 0$ $V_{CE} = 100V, V_{BE} = 0$			500 500 500 500	μΑ μΑ μΑ μΑ
I <sub>EBO</sub>	Emitter Cut-off Current		$V_{EB} = 5V, I_{C} = 0$			2	mA
h <sub>FE</sub>	* DC Current Gain	: BD675A/677A/679A : BD681	$V_{CE} = 3V, I_{C} = 2A$ $V_{CE} = 3V, I_{C} = 1.5A$	750 750			
V <sub>CE</sub> (sat)	* Collector-Emitter Satura	tion Voltage : BD675A/677A/679A : BD681	I <sub>C</sub> = 2A, I <sub>B</sub> = 40mA I <sub>C</sub> = 1.5A, I <sub>B</sub> = 30mA			2.8 2.5	V V
V <sub>BE</sub> (on)	* Base-Emitter ON Voltage	e : BD675A/677A/679A : BD681	$V_{CE} = 3V, I_{C} = 2A$ $V_{CE} = 3V, I_{C} = 1.5A$			2.5 2.5	V V
* Pulse Test: PW=	300μs, duty Cycle=1.5% Pulsed						

©2000 Fairchild Semiconductor International

# **Typical Characteristics**

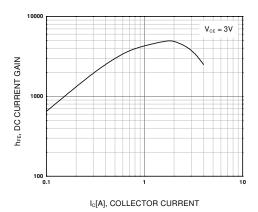


Figure 1. DC current Gain

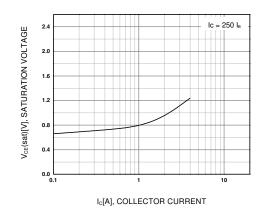


Figure 2. Collector-Emitter Saturation Voltage

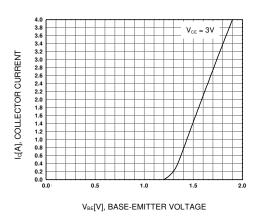


Figure 3. Base-Emitter On Voltage

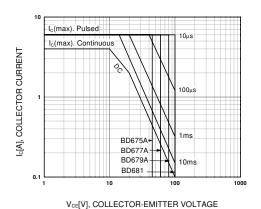


Figure 4. Safe Operating Area

Rev. A, February 2000





Figure 5. Power Derating


 $\mathsf{T}_{c}[{}^{\circ}\mathsf{C}],\,\mathsf{CASE}\,\mathsf{TEMPERATURE}$ 

©2000 Fairchild Semiconductor International

# **Package Demensions**

TO-126

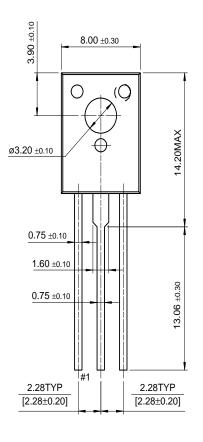

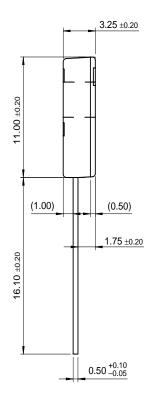



Dimensions in Millimeters

#### **TRADEMARKS**

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

FACT™ QFET™ FACT Quiet Series™ QS™

FAST® Quiet Series $^{TM}$  SuperSOT $^{TM}$ -3 SuperSOT $^{TM}$ -6

#### **DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR INTERNATIONAL.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.


2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

#### PRODUCT STATUS DEFINITIONS

#### **Definition of Terms**

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.

©2000 Fairchild Semiconductor International Rev. E

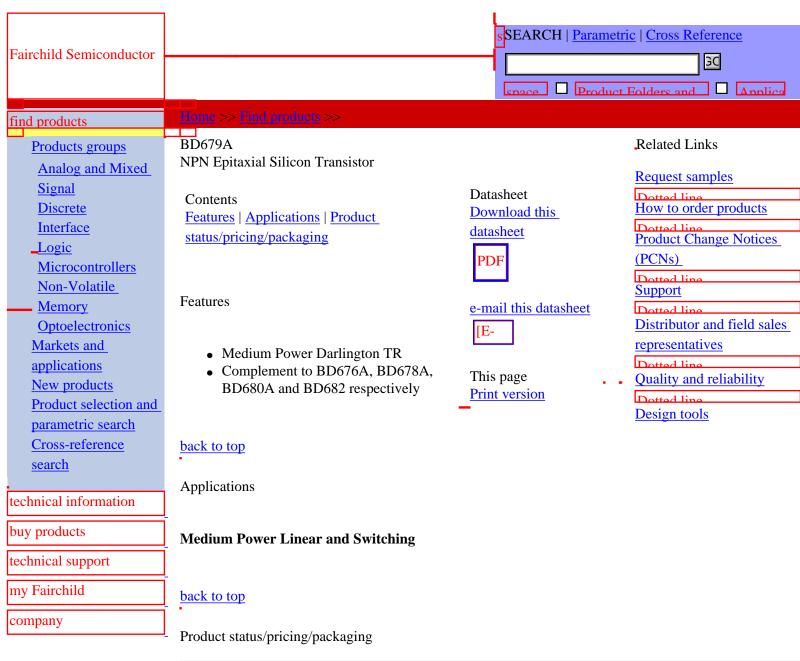


Product	Product status	Pricing*	Package type	Leads	Packing method
BD679ASTU	Full Production	\$0.249	<u>TO-126</u>	3	RAIL
BD679AS	Full Production	\$0.249	<u>TO-126</u>	3	BULK

<sup>\* 1,000</sup> piece Budgetary Pricing

### back to top

<u>Home</u> | <u>Find products</u> | <u>Technical information</u> | <u>Buy products</u> | <u>Support</u> | <u>Company</u> | <u>Contact us</u> | <u>Site index</u> | <u>Privacy policy</u>

© Copyright 2002 Fairchild Semiconductor

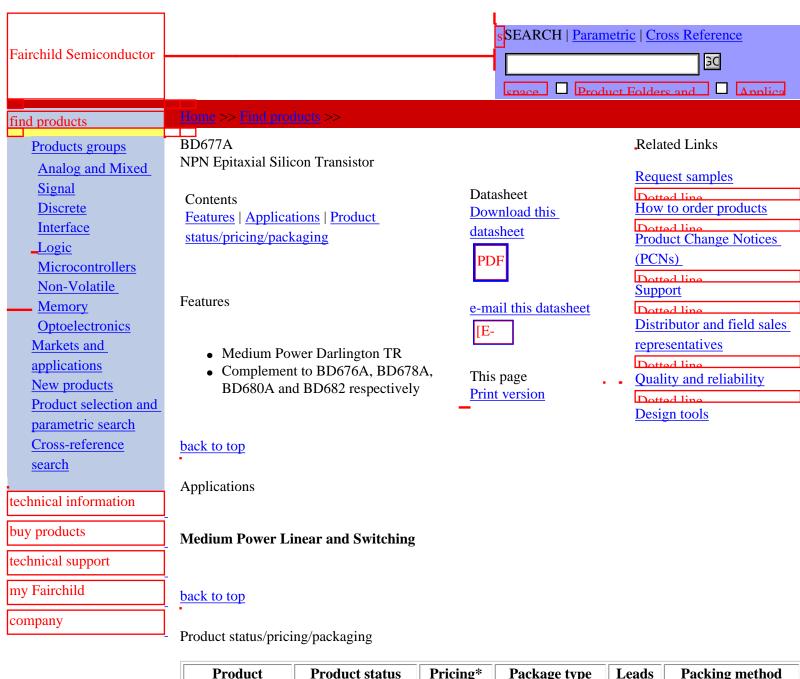

Product	Product status	Pricing*	Package type	Leads	Packing method
BD677AS	Full Production	\$0.249	<u>TO-126</u>	3	BULK
BD677ASTU	Full Production	\$0.249	<u>TO-126</u>	3	RAIL


<sup>\* 1,000</sup> piece Budgetary Pricing

### back to top

<u>Home</u> | <u>Find products</u> | <u>Technical information</u> | <u>Buy products</u> | <u>Support</u> | <u>Company</u> | <u>Contact us</u> | <u>Site index</u> | <u>Privacy policy</u>

© Copyright 2002 Fairchild Semiconductor



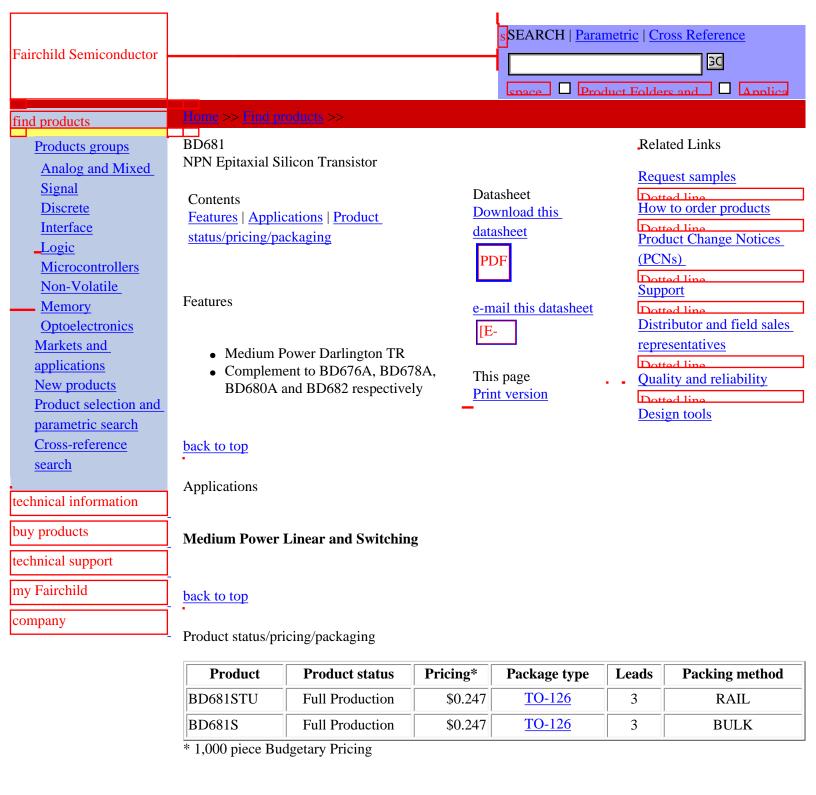

### back to top

<u>Home</u> | <u>Find products</u> | <u>Technical information</u> | <u>Buy products</u> | <u>Support</u> | <u>Company</u> | <u>Contact us</u> | <u>Site index</u> | <u>Privacy policy</u>

© Copyright 2002 Fairchild Semiconductor