

Ratings

Voltage: 300 V
 Temperature: 105 °C
 Flammability: VW-1



Conductor

Conductor count: 2
 Gauge: 20 AWG 0.52 mm²
 Material: bare copper strands
 Strand size: Ø 0.178 mm x 21
 Maximum resistance at 20 °C: 34.6 ohms/km

Outer jacket

Material: XLPE, LSZH (low smoke zero halogen)
 Color: red and black
 Diameter: 3.6 ±0.2 mm (1.8 ±0.10 x 2)
 Nominal thickness: 0.40 mm
 Resistance at 20 °C: 100 MΩ /km min

Wire marking: E339579 UL AWM STYLE 4384 20 AWG 105°C 300V VW-1 TENSILITY

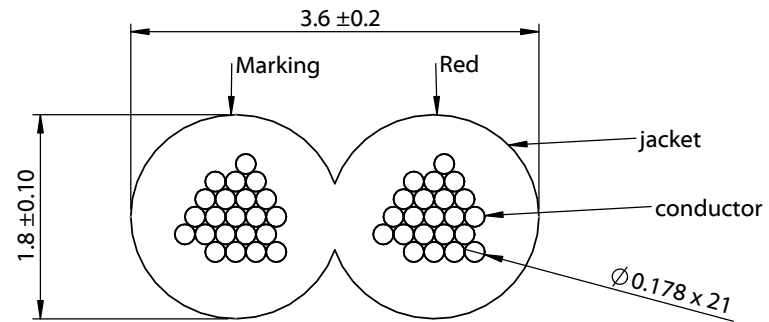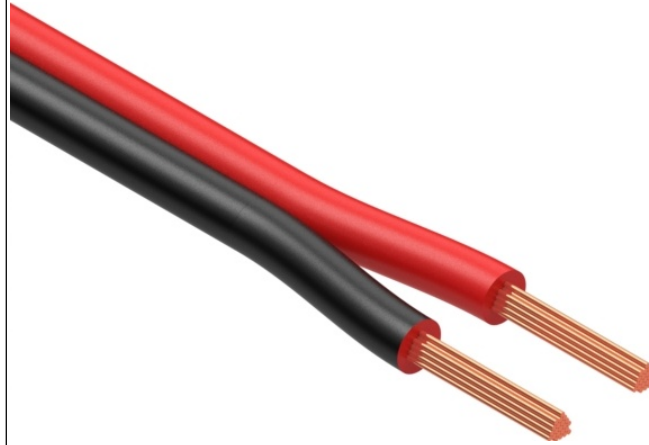

Revision:	Date:	Description:	Prepared: PB <small>Digitally signed by PB Date: 2022.09.05 08:24:09 -07'00'</small>	Notes:	TENSILITY <small>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</small>
A	9/1/2022	Initial release	Verified: JD <small>Digitally signed by JD Date: 2022.09.08 09:18:15 -07'00'</small>	RoHS compliant	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Function test: no open, no short circuit, no intermittent	Size: Part number: A 30-02857
				Description: Wire, 2C, 20 AWG, UL4384, 300V, 105C, 3.6 mm, VW-1, LSZH, XLPE, red and black	Scale: 15:1 Sheet 1 of 1

5

4

3

2

1