

Features

- Operating voltage: 3.5V~5.5V.
- Have Defrost, Reheat and Bagel function
- Relay output disable without external oscillator
- Adjustable timer: 30s~10mins
- Few external components
- Low cost 8-Pin DIP package

Ordering Information

Part No.	Package
PT8A2514APE	Lead free DIP-8


Notes:


1. E = Pb-free and Green

Function comparison table

PT8A2514A	DEFROST and REHEAT key interlock each other, and BEGAL key is individual
-----------	--

Block Diagram

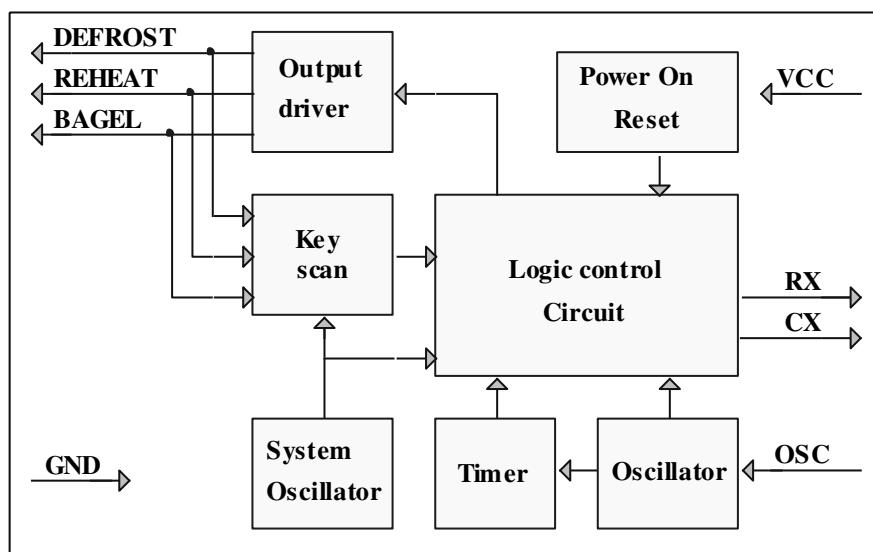

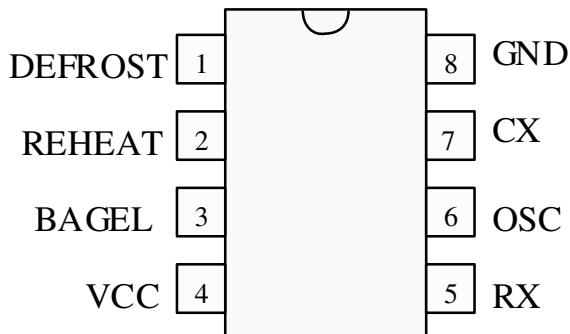New Toaster Controller
Pin Configuration

Pin Description

Pin No.	Pin Name	I/O	Description
1	Defrost	I/O	As input, requires a negative pulse to active "Defrost" function. As output, gives a "Defrost" function indicator, active low.
2	Reheat	I/O	As input, requires a negative pulse to active "Reheat" function. As output, gives a "Reheat" function indicator, active low.
3	Bagel	I/O	As input, requires a positive pulse to active "Bagel" function. As output, gives a "Bagel" function indicator, active high.
4	VCC	I	Power supply
5	RX	O	Shorts to VCC when Reheat function is active.
6	OSC	I/O	Oscillator's Frequency of 8.192KHz with an external R1, C1.
7	CX	O	Shorts to GND when defrost function is active.
8	GND	I	Ground

New Toaster Controller

Function Description (Refer to Block Diagram)

The chip mainly includes: Power on reset circuit, Logic control circuit, Output driver circuit, Key scan circuit, timer circuit, external R/C oscillator circuit and internal oscillator circuit etc.

Power on reset circuit

Internal power on reset circuit will reset all the logic circuit and the timer; it will clear all output pins when power on.

Logic control circuit

The logic circuit will carries out all the logic control function. It will scan key status, then control the output drive circuit drive a LED to indicate the work status, at the same time it will control CX or RX output to change the frequency of oscillator. When timer is out, it will pull down Defrost, Reheat pins to release relay.

Output driver circuit

The pin DEFROST, REHEAT and BAGEL, will drive a LED to indicate work status, at the same time DEFROST and REHEAT pin will driver a relay. BAGEL pin will drive a relay when bagel function is active, and it will drive a LED to indicate the bagel status.

Maximum Ratings

Storage Temperature.....	- 40°C to +125°C
Supply Voltage to Ground Potential (Inputs & V _{CC} only).....	0.5 to V _{CC} +0.5V
Supply Voltage to Ground Potential (Outputs & D/O only) ...	0.5 to V _{CC} +0.5V
DC Input Voltage	- 0.5V to V _{CC} +0.5V
DC Output Current	20mA
Power Dissipation.....	500mW

Note:

Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

Recommended Operation Conditions

Sym	Description	Min	Typ	Max	Unit
V _{CC}	Supply voltage.	3.5	5.0	5.5	V
V _{IH}	“H” Input Voltage	0.8 V _{CC}	-	-	V
V _{IL}	“L” Input Voltage	-	-	0.35 V _{CC}	V
T _A	Operation temperature	0	25	85	°C

New Toaster Controller
DC Electrical Characteristics

(Unless otherwise noted, $V_{CC}=5V$, $T_A=0 \sim 85^\circ C$)

Symbol	Parameter	Test Condition	Min	Typ	Max	Unit
V_{IL}	Input "L" Voltage (Defrost, Reheat)	-	-	-	2.5	V
V_{IH}	Input "H" Voltage (Bagel)	-	2.5	--	-	V
I_{OH1}	Output Source Current (Defrost, Reheat)	$V_{OH}=4.5V$, Input key scan	-5	--	-40	uA
I_{OH2}	Output Source Current (Defrost, Reheat)	$V_{OH}=4.5V$, Drive load	-10	-	-	mA
I_{OH3}	Output Source Current (Bagel)	$V_{OH}=4.5V$	-10	-	-	mA
I_{OH5}	Output Source Current (RX)	$V_{OH}=4.5V$	-1.5	-	-	mA
I_{OL1}	Output Sink Current(Defrost, Reheat)	$V_{OL}=0.5V$	4	-	-	mA
I_{OL2}	Output Sink Current(Bagel)	$V_{OL}=0.5V$	10	--	100	uA
I_{OL3}	Output Sink Current(CX)	$V_{OL}=0.5V$	4.0	-	-	mA
I_{IH}	Input high leakage current(CX,RX)	$V_{IH}=5V$	-	-	-1	µA
I_{IL}	Input low leakage current(CX,RX)	$V_{IL}=0V$	-	-	1	µA
OSC	Frequency of normal oscillator	$R1=47K\Omega$ $C1=332$, see Fig 1	7808	8192	8576	Hz
I_{CC}	Power supply current	$V_{CC}=5V$, $R1=47 K\Omega$, $C1=332$, all output floating. See Fig 1	-	-	500	µA

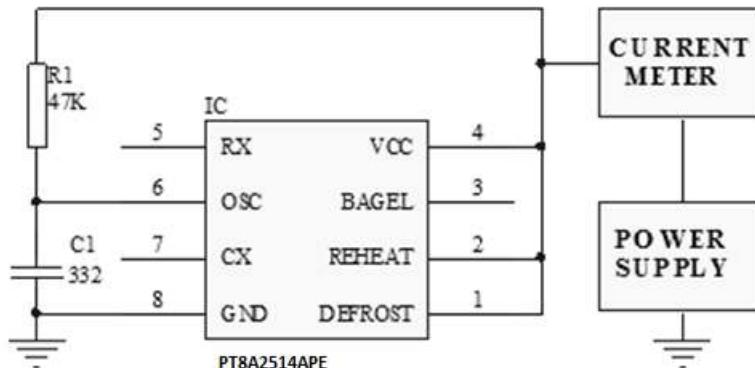
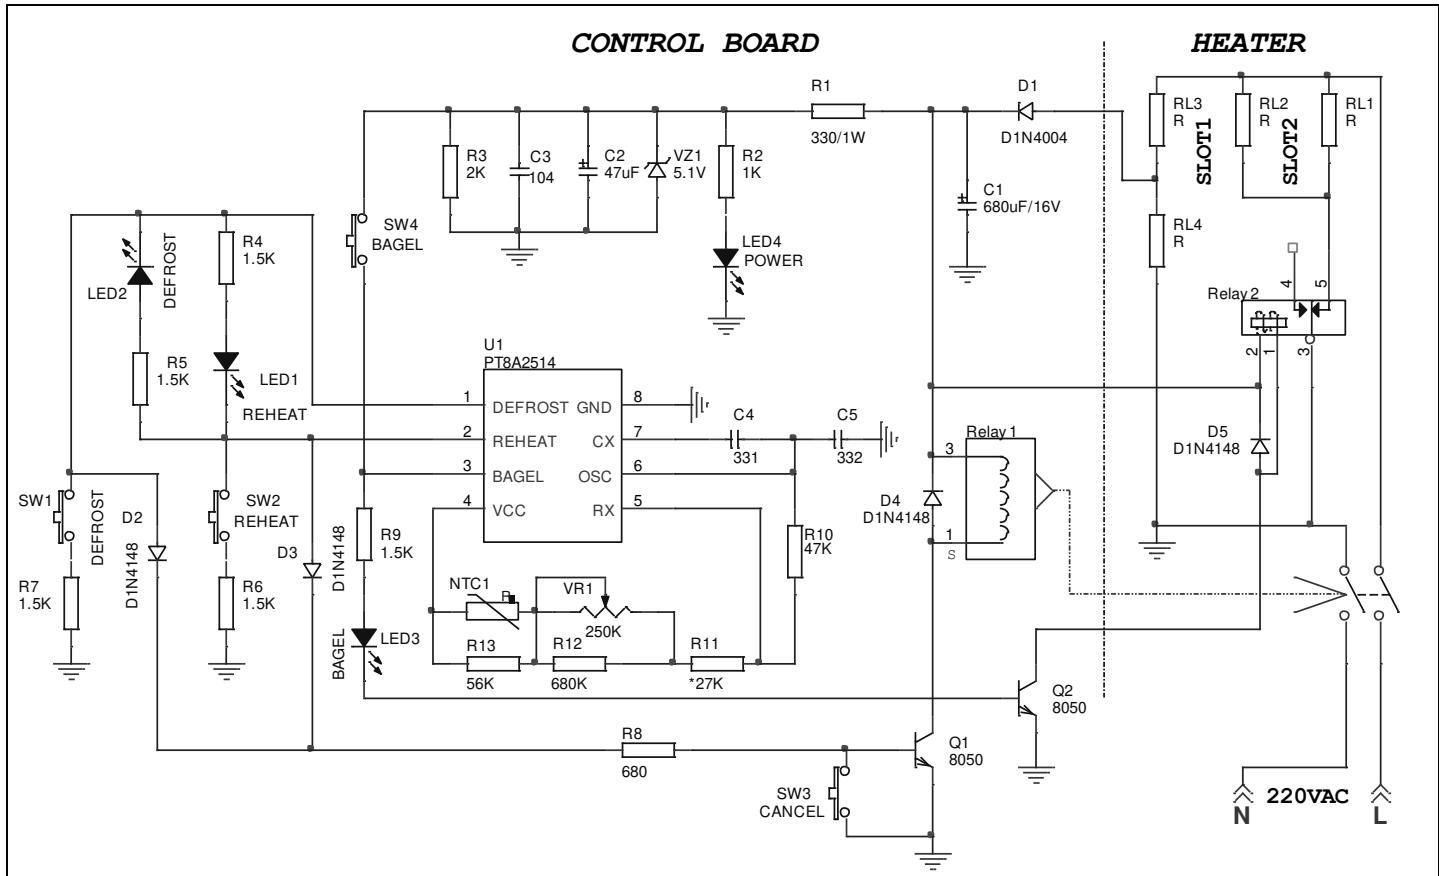


Fig1 Test circuit

New Toaster Controller
Typical Application Circuit


New Toaster Controller
Mechanical Information
PE (Lead free DIP-8)
