



# Technical data sheet

**SER2USB**



# SER2USB

Adapter to connect printers and multifunction printers with an USB connection to the COM interface of PCs, measuring devices, laboratory and diagnostic devices, control panels, medical devices as well as all other products with a serial interface.

## Supported Features

Only printing.

Scanning, PC-Fax, and Software - Toolboxes are not supported

GDI - Printer (without own emulation) are not supported.

## Supported systems

All systems. No drivers or software are required.

## Technical Data

### Power supply

**Input:** 100-240V / 50/60Hz  
**Output:** 5Volt / about 100 mA  
**Cable:** about 1.8m

### Serial interface

**Speed:** 2400 – 115200 Baud  
**Protocol:** None,RTS/CTS  
XON/XOFF  
**Parity:** None,Odd,Even  
**Databits:** 7,8  
**Stopbits** 1,2  
**Jack:** 9-pole SUB-D


### USB interface

**USB** USB1.0 Low-Speed  
USB1.1 Low/ Full-Speed  
USB2.0 Low / Full-Speed

**Class:** Printer  
**Class:** HUB

**Plug:** USB - B  
**Cable:** about 1.8m

**Speed:** Low-Speed 1.5 MBit/sec  
Full-Speed 12 MBit/sec

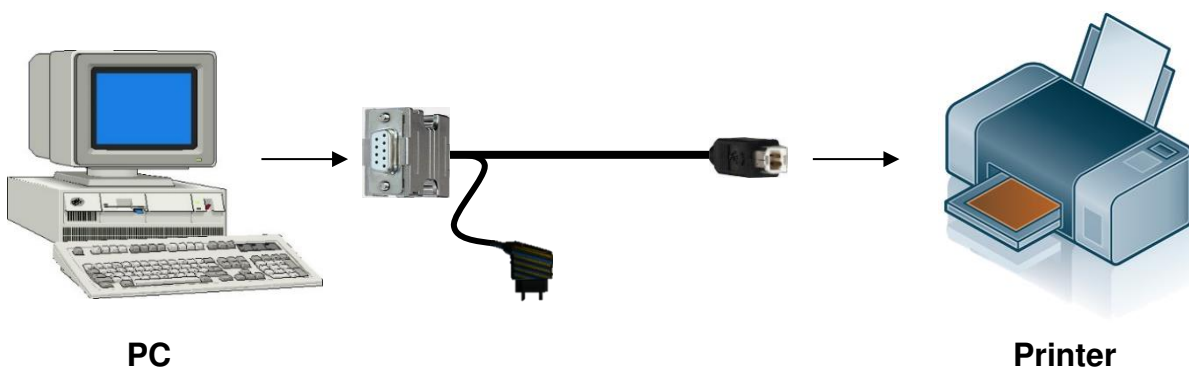

PC

Printer

## Hardware – Description



**Printer**



**parallel  
Interface**

## Power supply and Adapters

